

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)



Standardised centrifugal electric pumps built in stainless steel AISI 304 (3 Series) and AISI 316L (3L Series).

APPLICATIONS

- Water supply to civil, agricultural and industrial plants
- Pressure boosting
- Fire-fighting, heating systems and air-conditioning
- Moving industrial liquids
- Irrigation
- Refrigeration towers
- Swimming pools
- Emptying
- Washing plants

TECHNICAL DETAILS

- Can also work in vertical position


TECHNICAL DATA

- Maximum working pressure: 10 bar
- Maximum temperature of the liquid:
 - 10°C ÷ +90°C
 - 10°C ÷ +110°C (L-H-HS versions)
 - 20°C ÷ +120°C (E version)
- Self-ventilated 2 and 4 pole asynchronous motor
- Class of insulation F (B for high temperatures)
- IP 55 protection rating
- 230V ±10%, 50Hz single phase voltage, three phase voltage 220÷240/380÷415V ± 5% (up to 4 kW included), 50Hz, three phase voltage 380÷415/660÷720V ±5% (5.5 kW and over), 50Hz
- Protection is user's responsibility


MATERIALS

- Pump body and seal housing disc:
 - AISI 304 for
 - 3 Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - 65-125/160/200
 - AISI 316L for
 - 3L Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - 65-125/160/200
 - microcast AISI 316 for 3L Series 65-250
 - 80-160/200/250
- Impeller in:
 - AISI 304 for
 - 3 Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - AISI 316L for
 - 3L Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - microcast AISI 316 for 3 Series 65-125/160/200
 - 3L Series 65-125/160/200
 - 65-250
 - 80-160/200/250
- Mechanical sealing in:
 - Carbon/Ceramic/NBR for 3 Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - 65-125/160/200
 - SiC/SiC/FPM for 3L Series 32-125/160/200
 - 40-125/160/200
 - 50-125/160
 - 65-125/160/200/250
 - 80-160/200/250
- Special mechanical seals available on request


Available in 4 versions with 2 and 4 pole motors




Monobloc with extended motor shaft

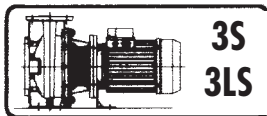

Monobloc with standard motor and rigid joint

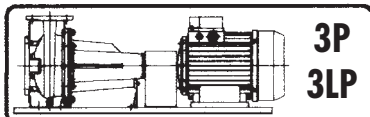

On base, with standard motor and flexible coupling

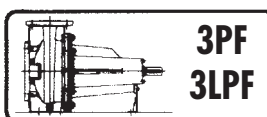

Pump with bare shaft

SPECIAL VERSIONS

- Also available with efficiency 1 motor (3S Series)


ACCESSORIES (on request)

- Counter-flanges available in the following materials:
 - galvanised
 - AISI 304
 - AISI 316


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

IDENTIFICATION CODE - 2 Poles

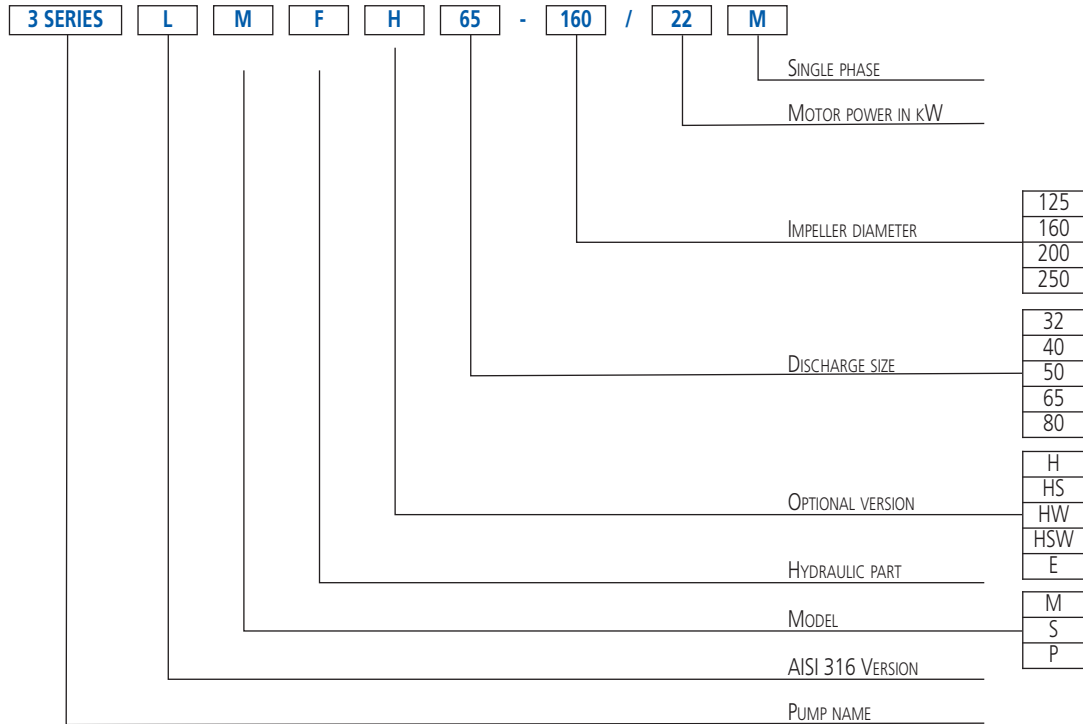


IDENTIFICATION CODE - 4 Poles

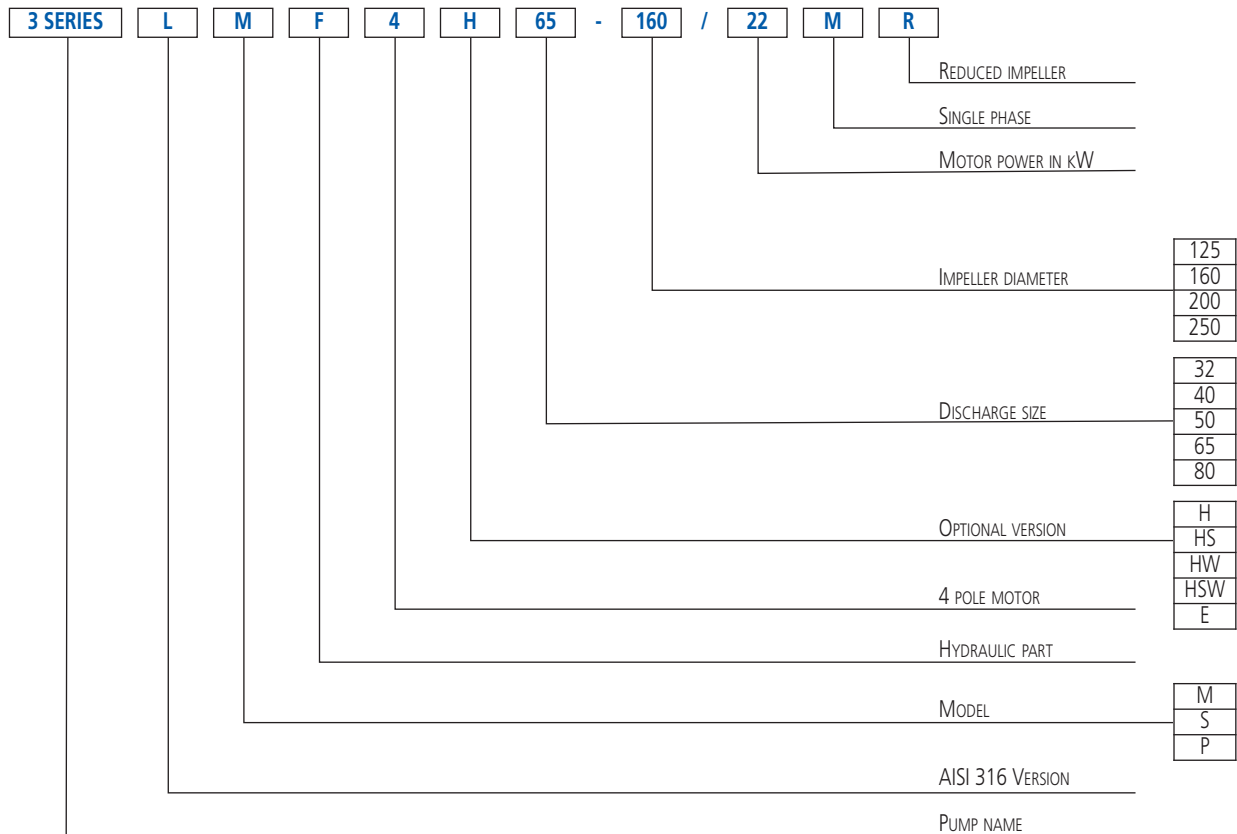

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3 SERIES PERFORMANCE RANGE at 2900 min⁻¹ (according to ISO 9906 Attachment A)

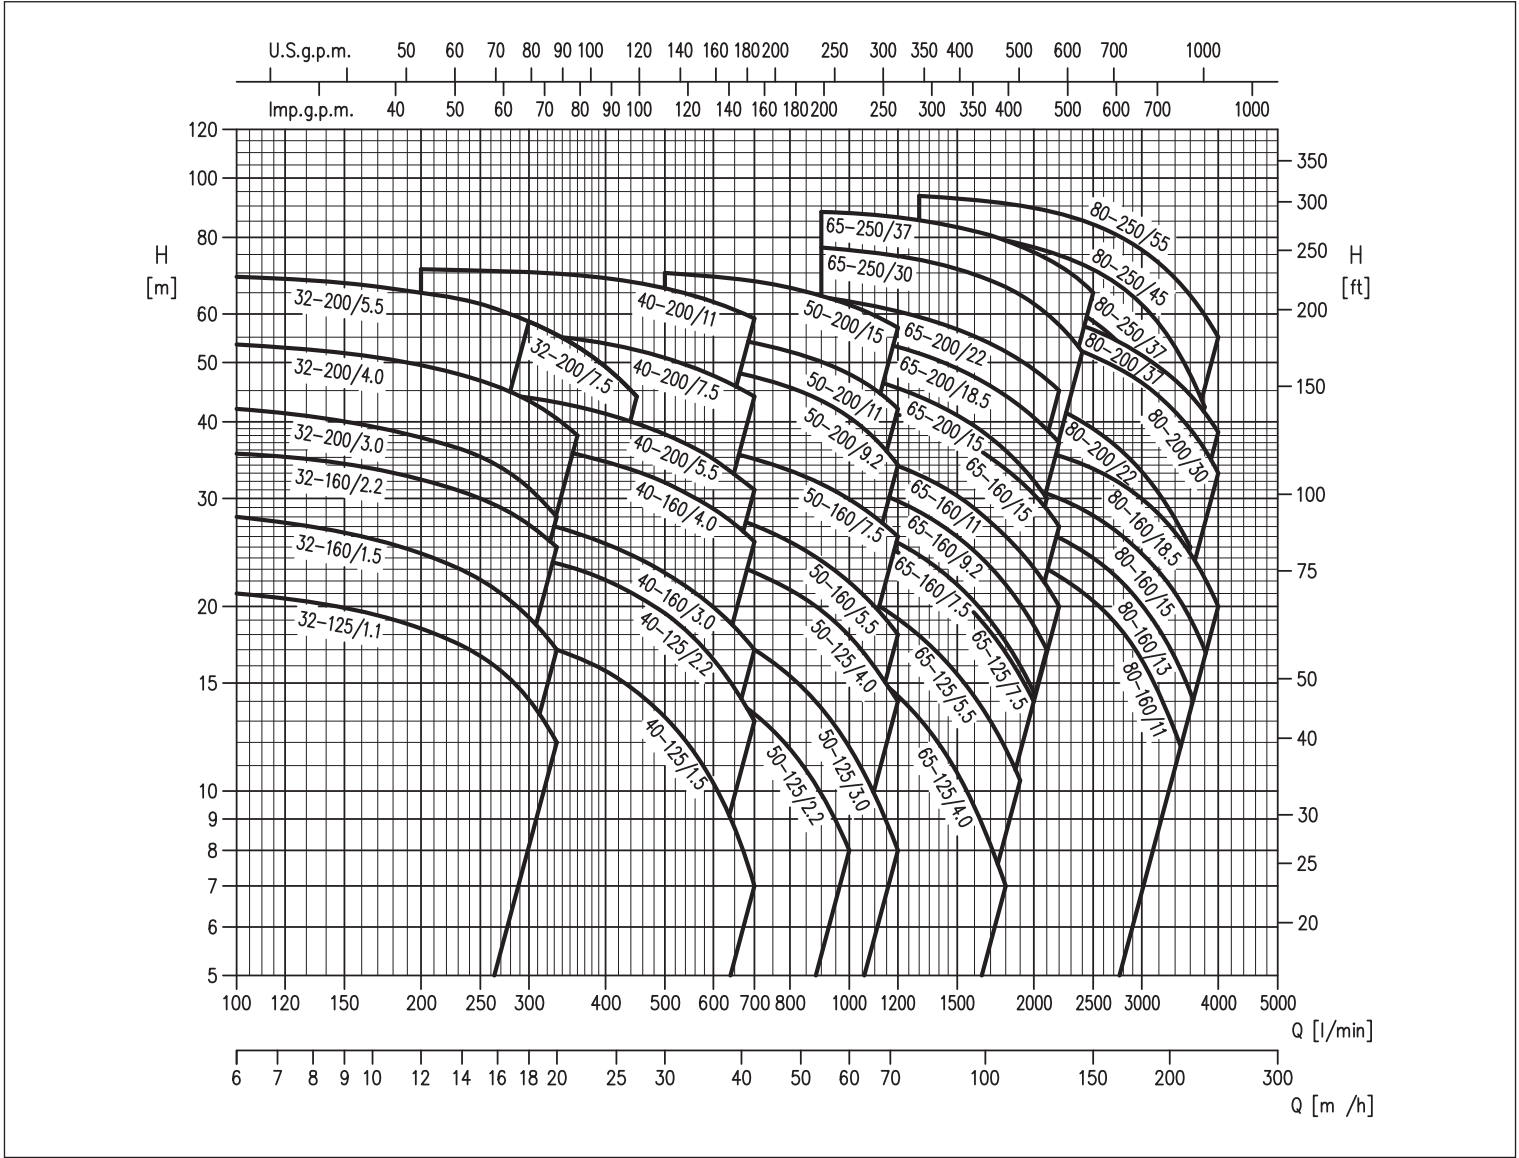

	Versions	3M	3S	3P	3LM	3LS	3LP
Pump	32-125	√	√	√	√	√	√
	32-160	√	√	√	√	√	√
	32-200	√	√	√	√	√	√
	40-125	√	√	√	√	√	√
	40-160	√	√	√	√	√	√
	40-200	√	√	√	√	√	√
	50-125	√	√	√	√	√	√
	50-160	√	√	√	√	√	√
	50-200	√	√	√	√	√	√
	65-125	√	√	√	√	√	√
	65-160	√	√	√	√	√	√
	65-200	√	√	√	√	√	√
	65-250	-	-	-	-	•	•
	80-160	-	-	-	-	•	•
	80-200	-	-	-	-	•	•
	80-250	-	-	-	-	•	•

√ = Models also available in the H and HS version for 32, 40, 50, 65-125/160/200

• = Models also available in the H and E version for 65-250, 80

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

32-40-50 PERFORMANCE TABLE

Model	P ₂		Q=Flow rate														
	[HP]	[kW]	l/min	100	150	200	300	333	360	400	450	500	600	700	800	1000	1200
			m ³ /h	6	9	12	18	20	22	24	27	30	36	42	48	60	72
			H=Head [m]														
32-125/1.1(M)	1,5	1,1	21,0	19,9	18,4	14,1	12,0	-	-	-	-	-	-	-	-	-	-
32-160/1.5(M)	2	1,5	28,0	26,5	24,5	19,2	17,0	-	-	-	-	-	-	-	-	-	-
32-160/2.2(M)	3	2,2	35,5	34,0	32,0	27,0	25,0	-	-	-	-	-	-	-	-	-	-
32-200/3.0	4	3	42,0	40,0	37,5	31,0	28,0	-	-	-	-	-	-	-	-	-	-
32-200/4.0	5,5	4	53,5	52,0	49,5	43,5	40,5	38,0	-	-	-	-	-	-	-	-	-
32-200/5.5	7,5	5,5	69,0	67,5	65,0	58,5	-	-	-	-	-	-	-	-	-	-	-
32-200/7.5	10	7,5	69,0	67,5	65,0	58,5	55,5	53,0	49,0	44,0	-	-	-	-	-	-	-
40-125/1.5(M)	2	1,5	-	-	19,0	17,6	17,0	16,5	15,7	14,5	13,2	10,3	7,0	-	-	-	-
40-125/2.2(M)	3	2,2	-	-	25,5	24,0	23,5	23,0	22,0	21,0	19,5	16,4	13,0	-	-	-	-
40-160/3.0	4	3	-	-	29,5	27,5	27,0	26,5	25,5	24,0	22,5	20,0	17,0	-	-	-	-
40-160/4.0	5,5	4	-	-	38,5	37,0	36,0	35,5	34,5	33,0	32,0	29,0	25,5	-	-	-	-
40-200/5.5	7,5	5,5	-	-	45,5	44,0	43,0	42,5	41,0	39,5	38,0	35,0	31,0	-	-	-	-
40-200/7.5	10	7,5	-	-	57,0	55,5	55,0	54,5	53,5	52,5	51,0	47,5	44,0	-	-	-	-
40-200/11	15	11	-	-	71,0	70,0	70,0	69,5	68,5	67,5	66,0	63,0	59,0	-	-	-	-
50-125/2.2(M)	3	2,2	-	-	-	-	-	-	17,5	17,0	16,3	14,9	13,4	11,7	8,0	-	-
50-125/3.0	4	3	-	-	-	-	-	-	20,5	20,0	19,6	18,4	17,0	15,4	11,8	8,0	-
50-125/4.0	5,5	4	-	-	-	-	-	-	26,0	25,5	25,0	24,0	22,5	21,5	17,9	14,0	-
50-160/5.5	7,5	5,5	-	-	-	-	-	-	31,0	30,5	30,0	28,5	27,0	25,5	22,0	18,0	-
50-160/7.5	10	7,5	-	-	-	-	-	-	38,5	38,0	37,5	36,0	35,0	33,5	30,0	26,0	-
50-200/9.2	12,5	9,2	-	-	-	-	-	-	-	-	50,0	49,0	47,5	45,5	40,5	34,0	-
50-200/11	15	11	-	-	-	-	-	-	-	-	56,0	55,0	54,0	52,0	48,0	42,0	-
50-200/15	20	15	-	-	-	-	-	-	-	-	70,0	69,0	68,0	66,0	62,0	57,0	-

(M) Single phase version for 3M Series only

65-80 PERFORMANCE TABLE

2 Poles


Model	P ₂		Q=Flow rate																	
	[HP]	[kW]	l/min	600	700	900	1300	1500	1700	1900	2100	2200	2300	2400	2500	3000	3400	3600	3800	4000
			m ³ /h	36	42	54	78	90	102	114	126	132	138	144	150	180	204	216	228	240
			H=Head [m]																	
65-125/4.0	5,5	4	19,8	19,0	17,3	13,3	11,0	8,6	6,3	-	-	-	-	-	-	-	-	-	-	-
65-125/5.5	7,5	5,5	-	24,0	22,2	18,0	15,7	13,3	10,8	8,0	-	-	-	-	-	-	-	-	-	-
65-125/7.5	10	7,5	-	29,5	27,8	23,5	21,1	18,7	16,1	13,4	12,0	-	-	-	-	-	-	-	-	-
65-160/7.5	10	7,5	-	30,0	28,6	24,8	22,5	19,9	17,1	14,2	-	-	-	-	-	-	-	-	-	-
65-160/9.2	12,5	9,2	-	34,5	32,8	28,8	26,5	23,9	21,1	18,3	16,8	-	-	-	-	-	-	-	-	-
65-160/11	15	11	-	38,5	37,1	33,1	30,9	28,4	25,8	23,0	21,5	20,0	-	-	-	-	-	-	-	-
65-160/15	20	15	-	45,5	44,0	40,0	37,8	35,3	32,6	29,6	28,0	26,5	-	-	-	-	-	-	-	-
65-200/15	20	15	-	51,0	49,0	44,0	41,5	38,4	35,3	31,8	30,0	-	-	-	-	-	-	-	-	-
65-200/18.5	25	18,5	-	58,5	56,5	51,5	49,0	46,0	43,0	39,7	38,0	36,3	-	-	-	-	-	-	-	-
65-200/22	30	22	-	65,5	64,0	59,5	57,0	54,0	51,0	48,0	46,5	45,0	-	-	-	-	-	-	-	-
65-250/30	40	30	-	-	77,0	73,5	71,0	68,0	64,5	60,0	57,5	55,0	52,0	-	-	-	-	-	-	-
65-250/37	50	37	-	-	88,0	85,5	83,0	80,5	77,5	74,0	72,0	70,0	67,5	65,0	-	-	-	-	-	-
80-160/11	15	11	-	-	-	27,3	26,4	25,4	24,2	23,0	22,4	21,8	21,1	20,4	16,4	12,5	-	-	-	-
80-160/13	17,5	13	-	-	-	30,5	29,7	28,8	27,7	26,5	25,9	25,3	24,6	24,0	20,1	16,5	14,5	-	-	-
80-160/15R	20	15	-	-	-	30,5	29,7	28,8	27,7	26,5	25,9	25,3	24,6	24,0	20,1	16,5	14,5	-	-	-
80-160/15	20	15	-	-	-	34,0	33,3	32,5	31,5	30,5	30,0	29,4	28,8	28,1	24,4	21,0	19,1	17,0	-	-
80-160/18.5	25	18,5	-	-	-	39,0	38,4	37,6	36,7	35,7	35,2	34,7	34,1	33,5	30,0	26,4	24,4	22,3	20,0	-
80-200/22	30	22	-	-	-	48,0	47,0	45,5	44,5	43,0	42,0	41,0	40,0	39,0	33,2	27,8	25,0	-	-	-
80-200/30	40	30	-	-	-	58,5	58,0	57,0	56,0	54,5	54,0	53,0	52,0	51,0	46,5	41,5	39,0	36,1	33,0	-
80-200/37	50	37	-	-	-	64,0	63,0	62,0	61,0	59,5	59,0	58,0	57,5	56,5	51,5	47,0	44,5	41,5	38,5	-
80-250/37	50	37	-	-	-	71,5	70,5	68,5	66,5	64,0	63,0	61,5	60,0	58,5	48,5	38,0	-	-	-	-
80-250/45	60	45	-	-	-	82,5	81,5	80,0	78,0	76,0	75,0	73,5	72,5	71,0	62,0	53,0	48,0	42,5	-	-
80-250/55	75	55	-	-	-	93,5	92,5	91,5	90,0	88,5	87,5	86,5	85,5	84,0	76,5	68,5	64,5	60,0	55,0	-

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 32 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

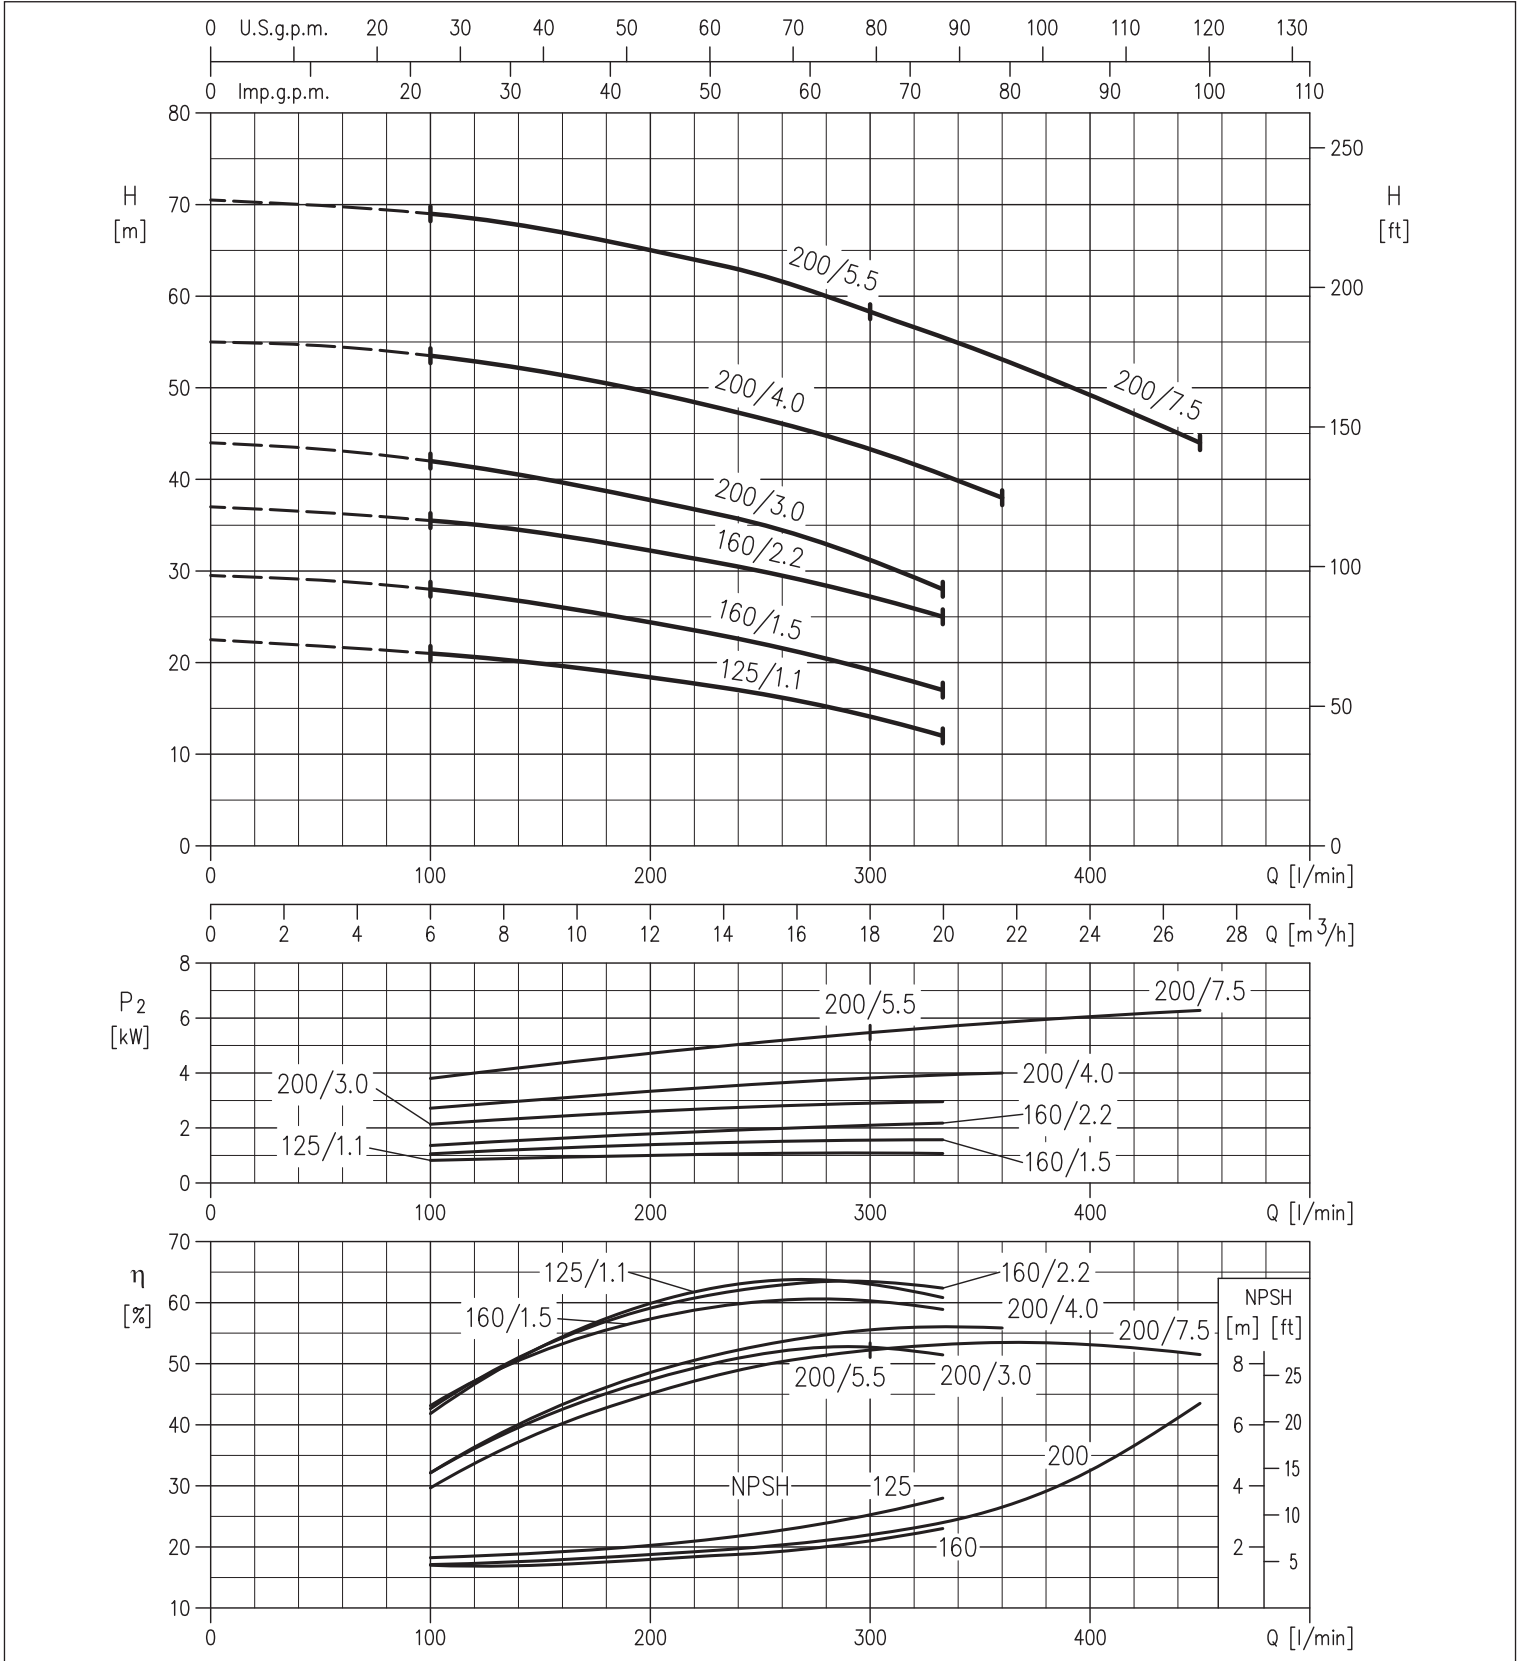


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 40 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

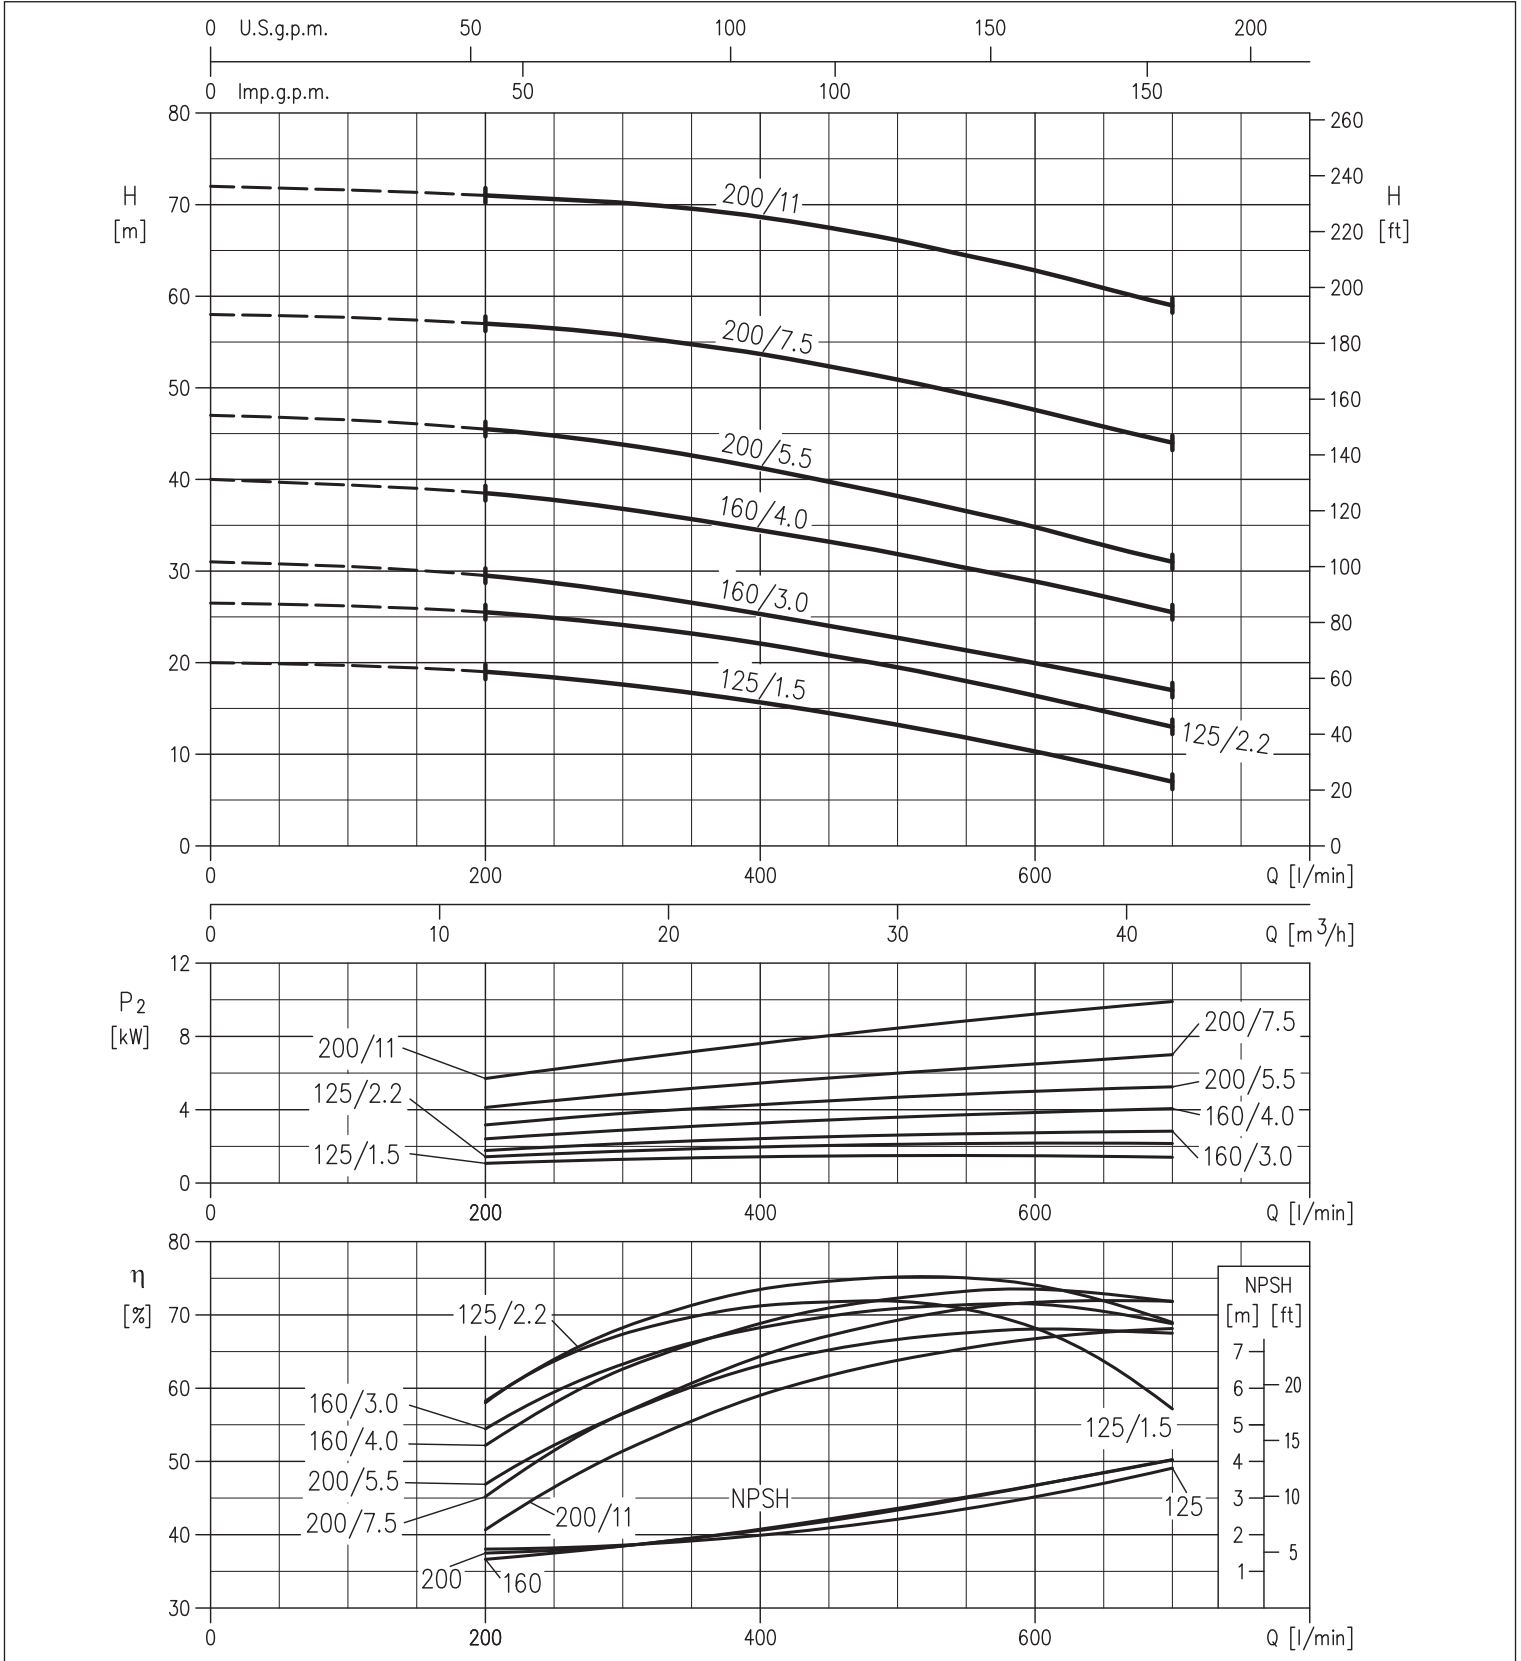


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 50 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

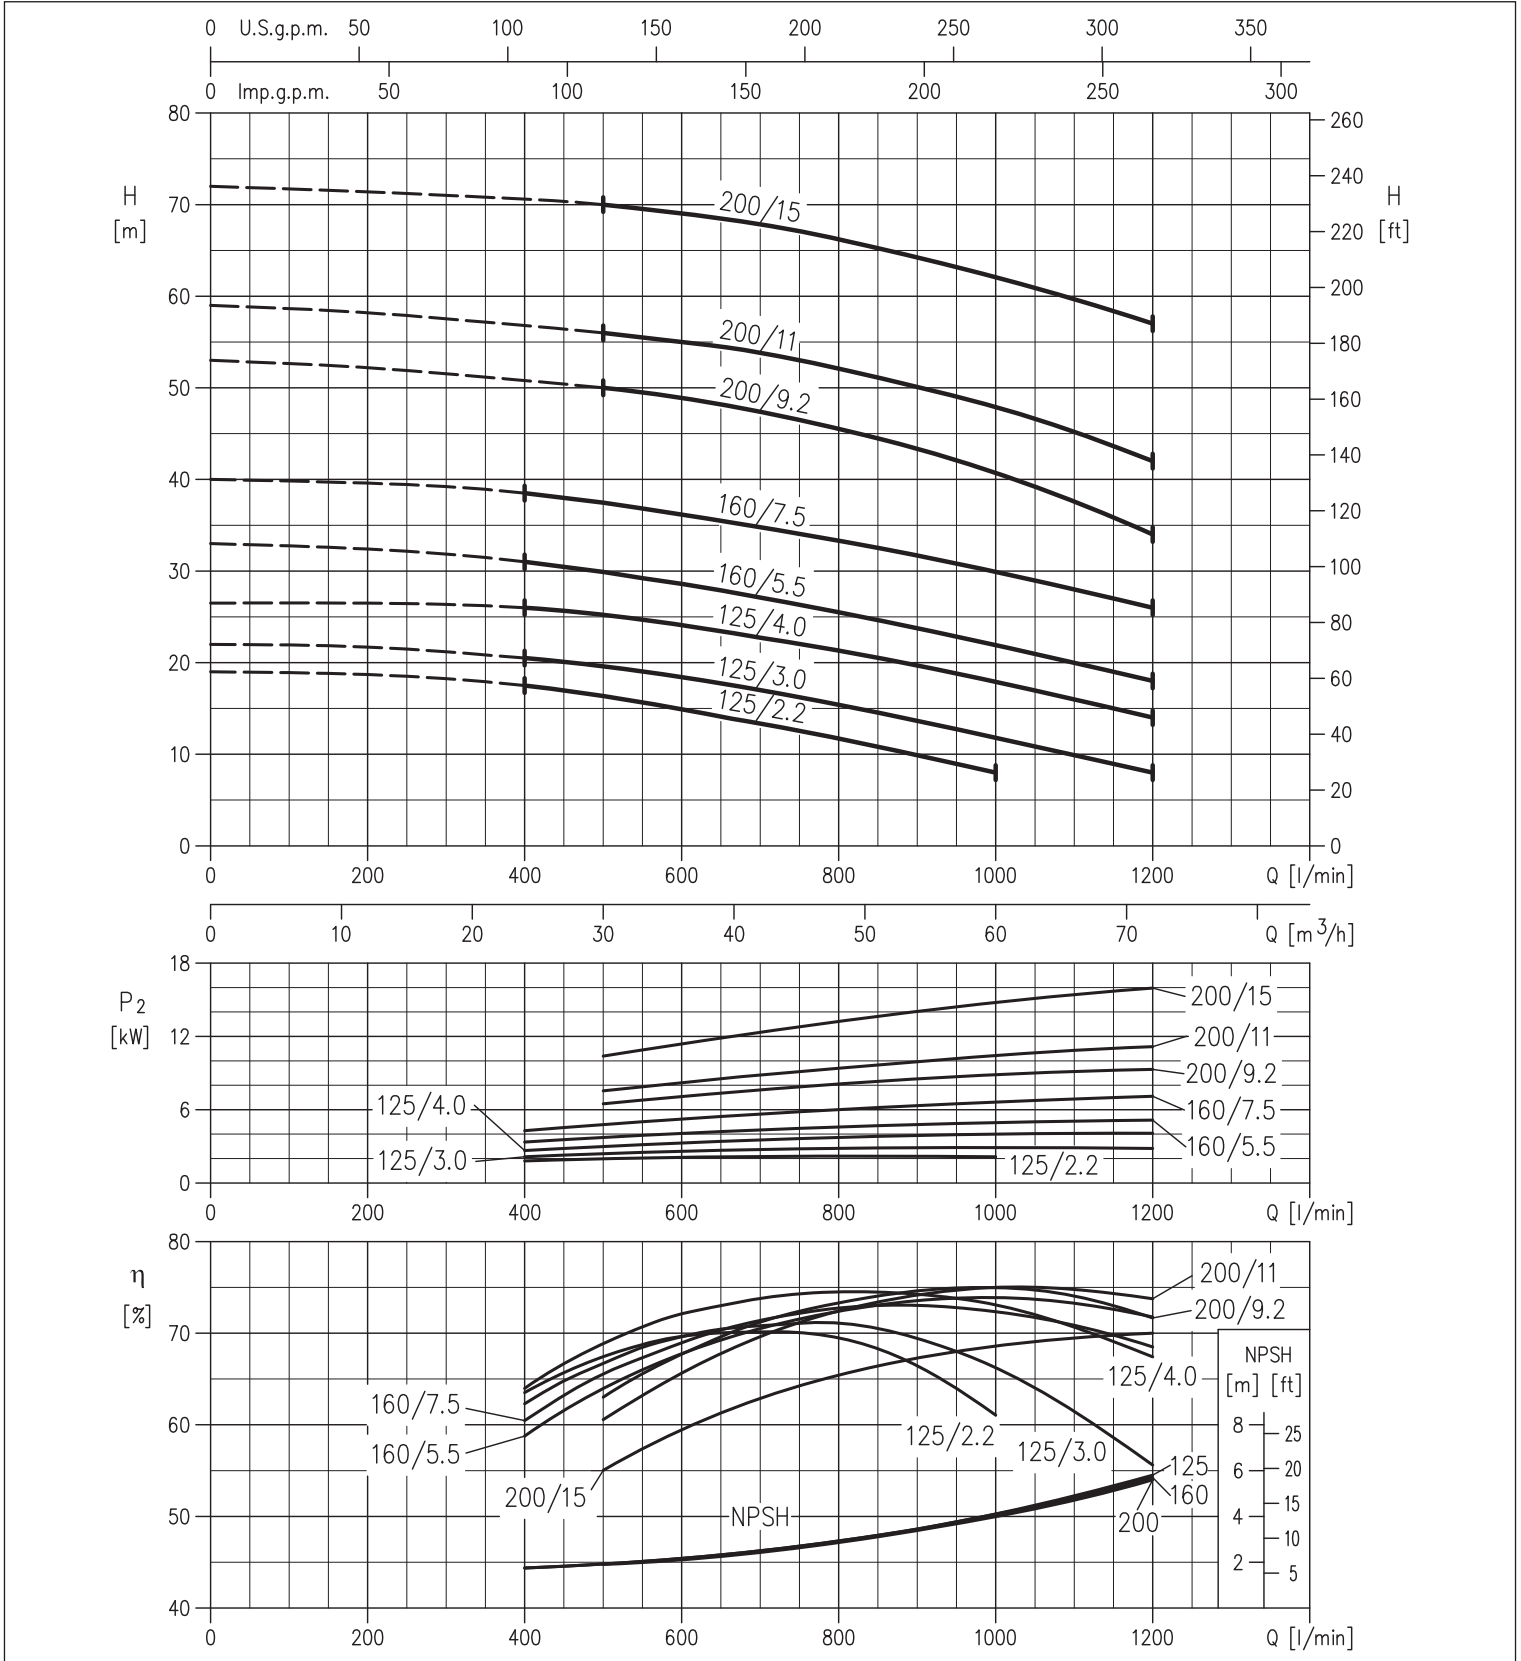


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 65 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

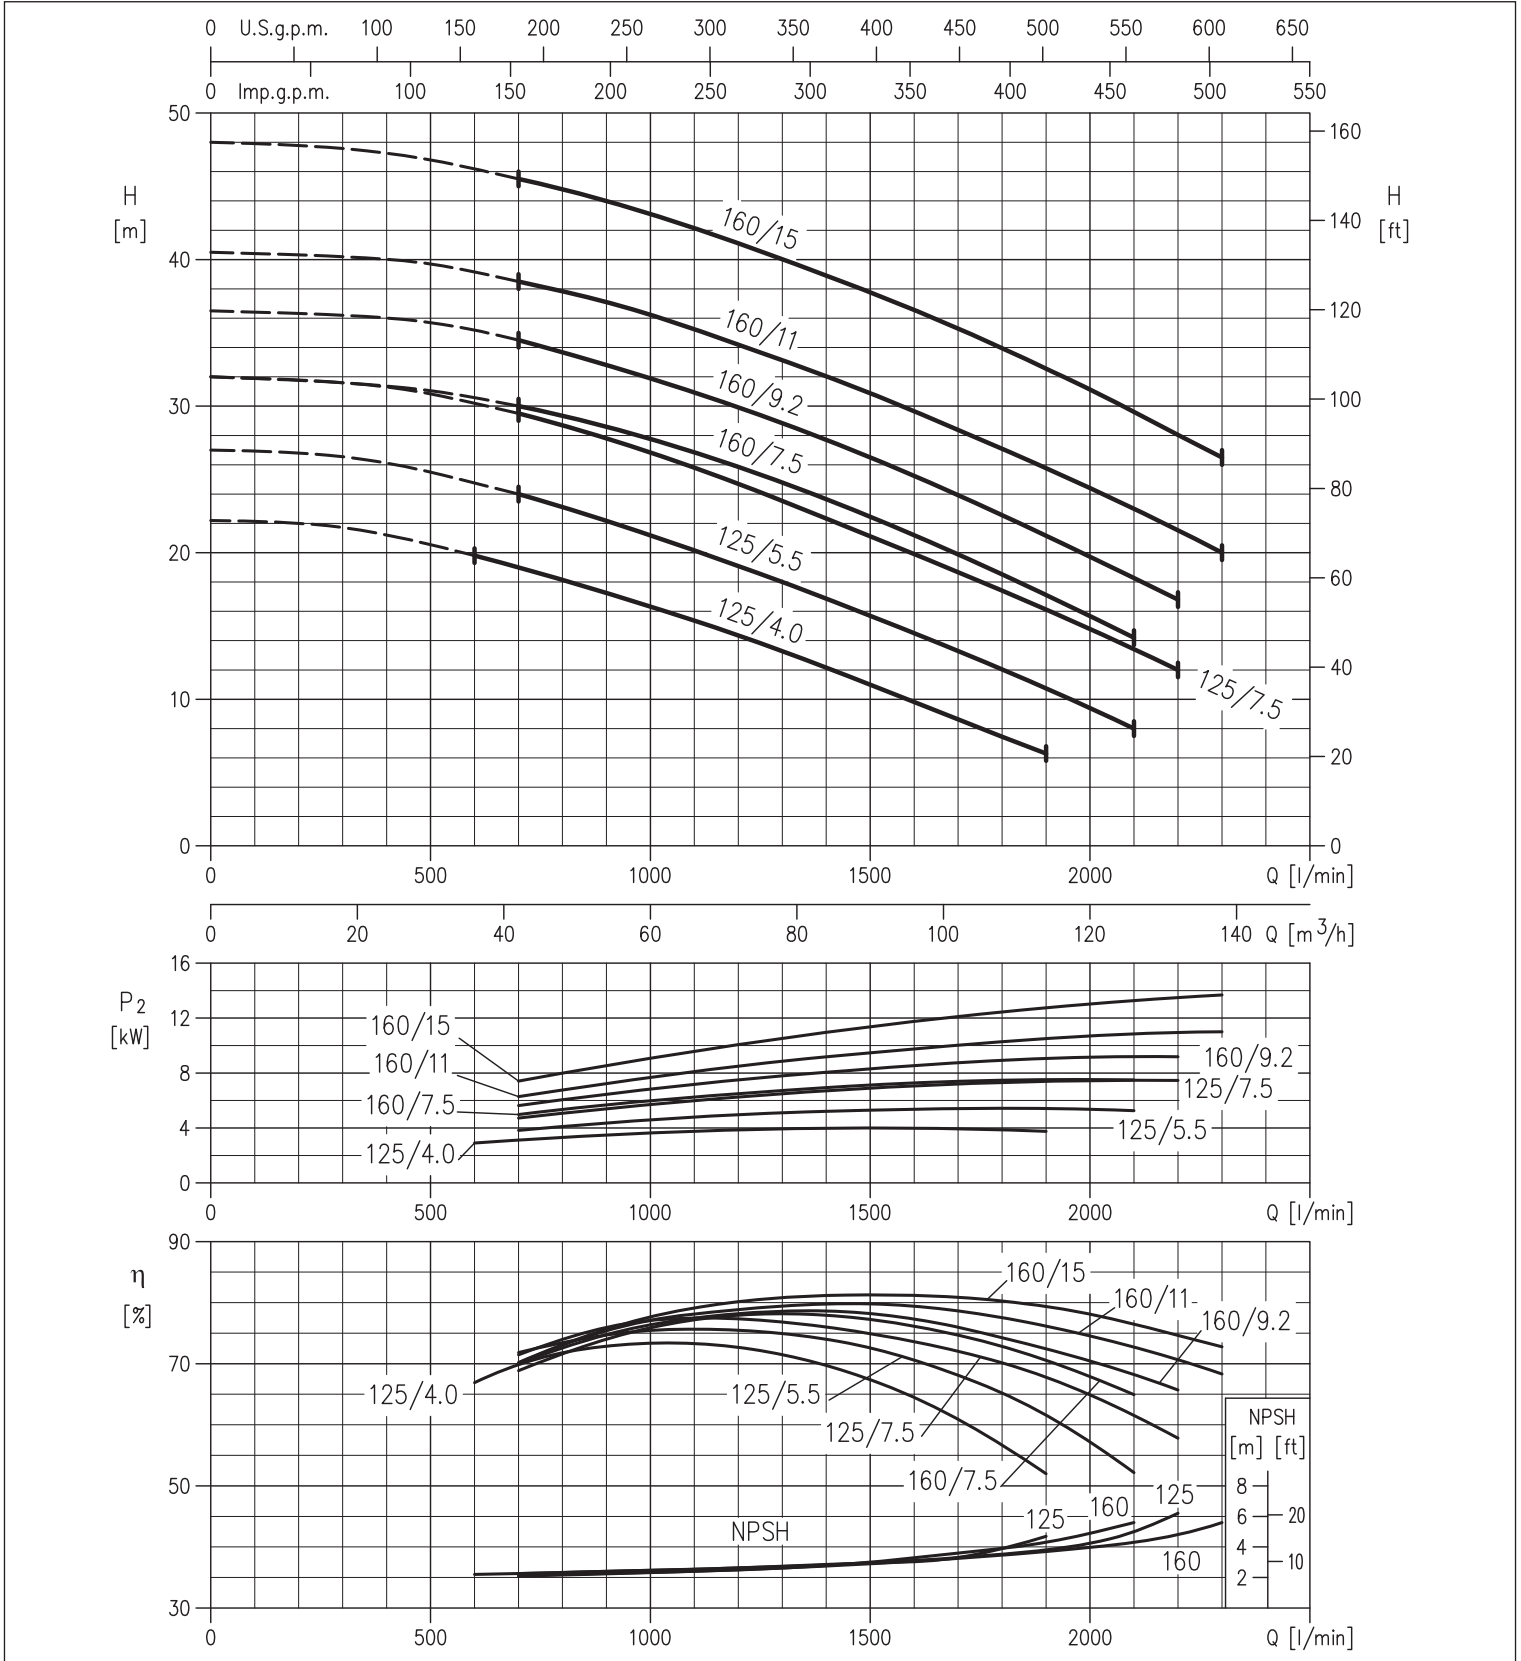


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3L 65 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

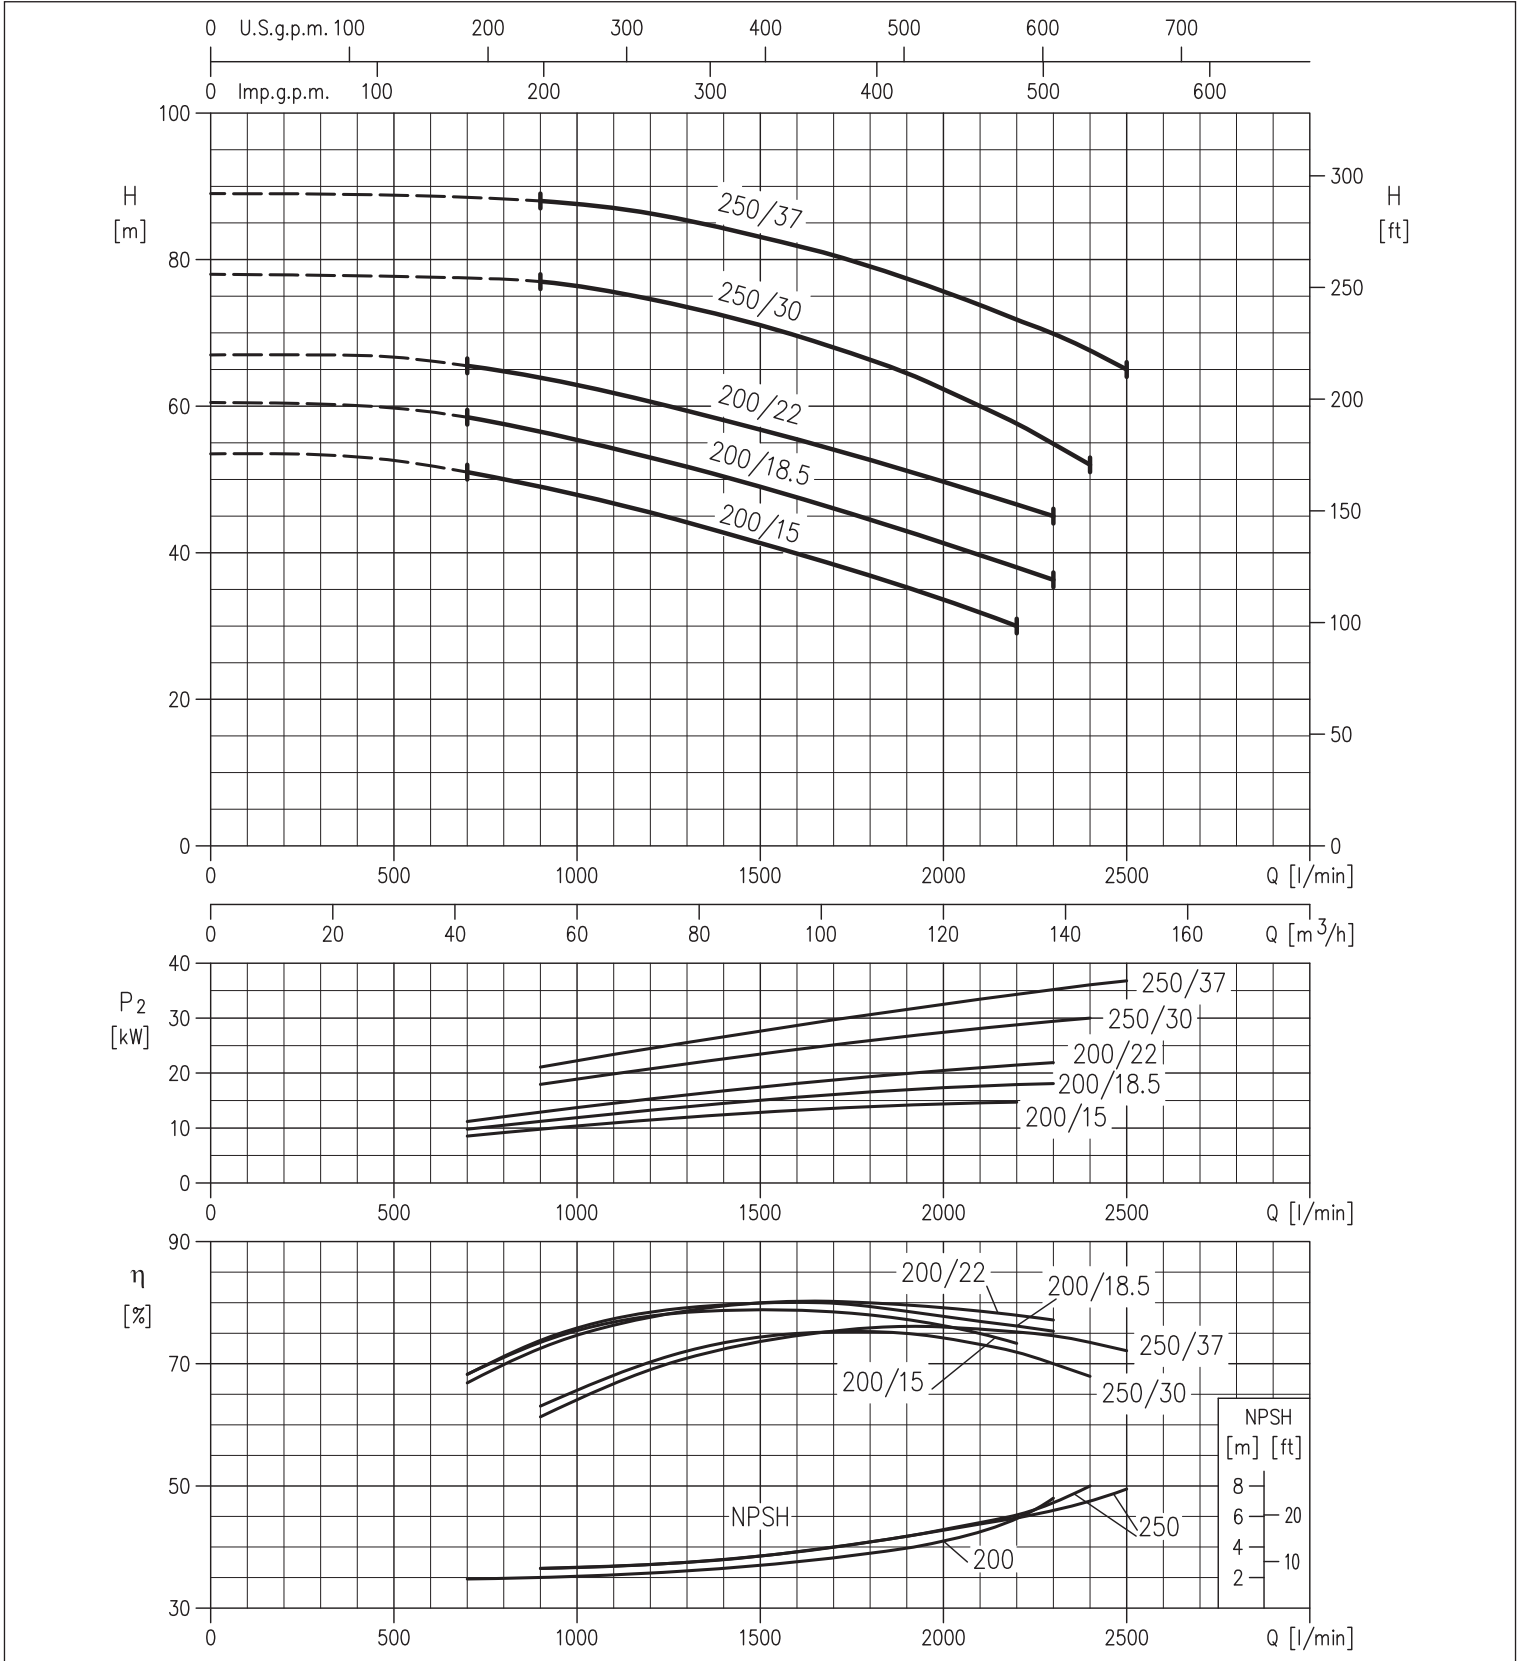




3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3L 80 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

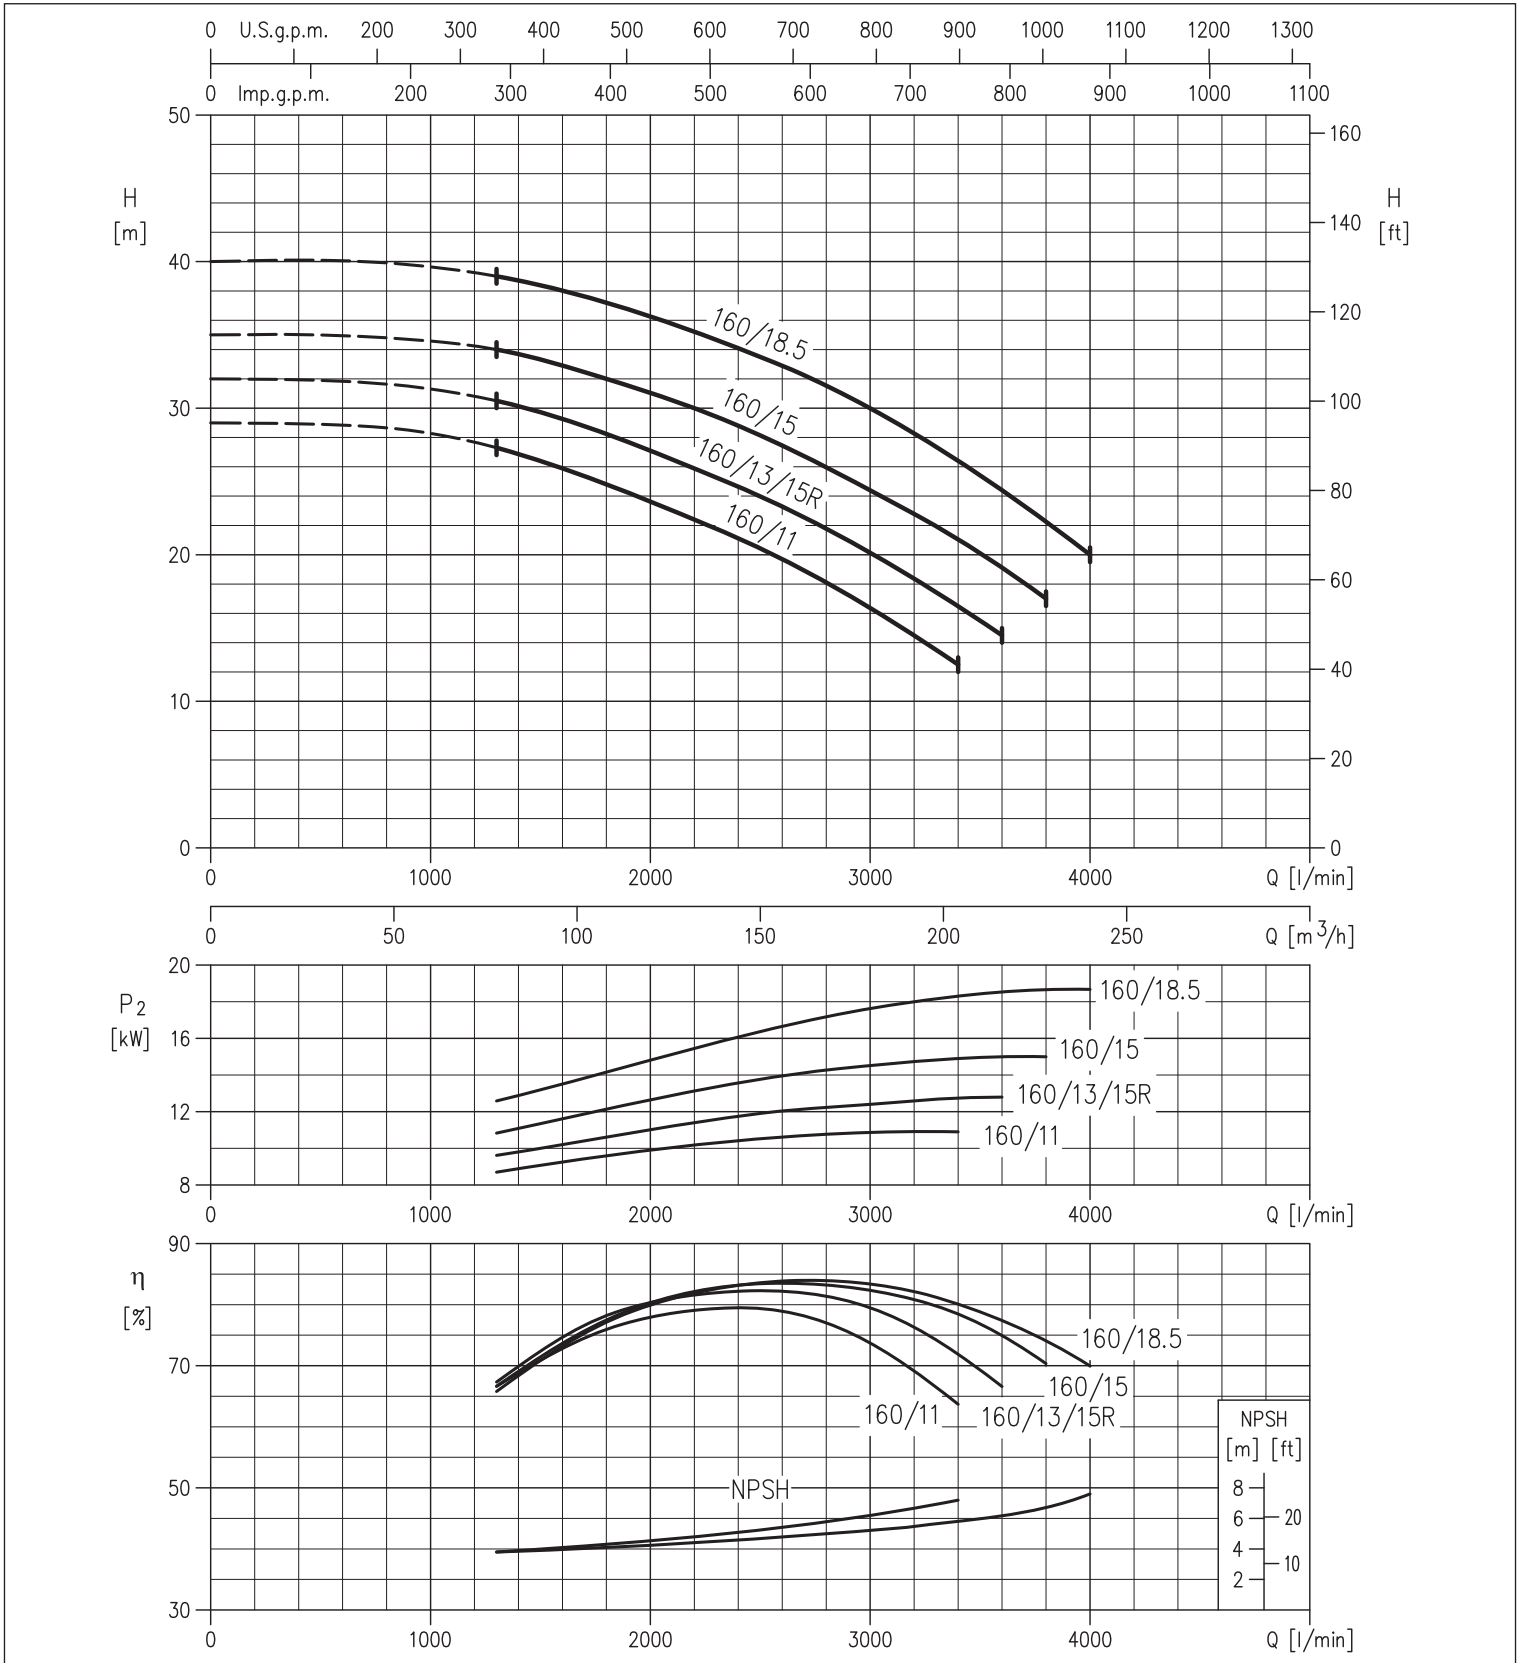




3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3L 80 PERFORMANCE CURVES at 2900 min⁻¹ (according to ISO 9906 Attachment A)

2 Poles

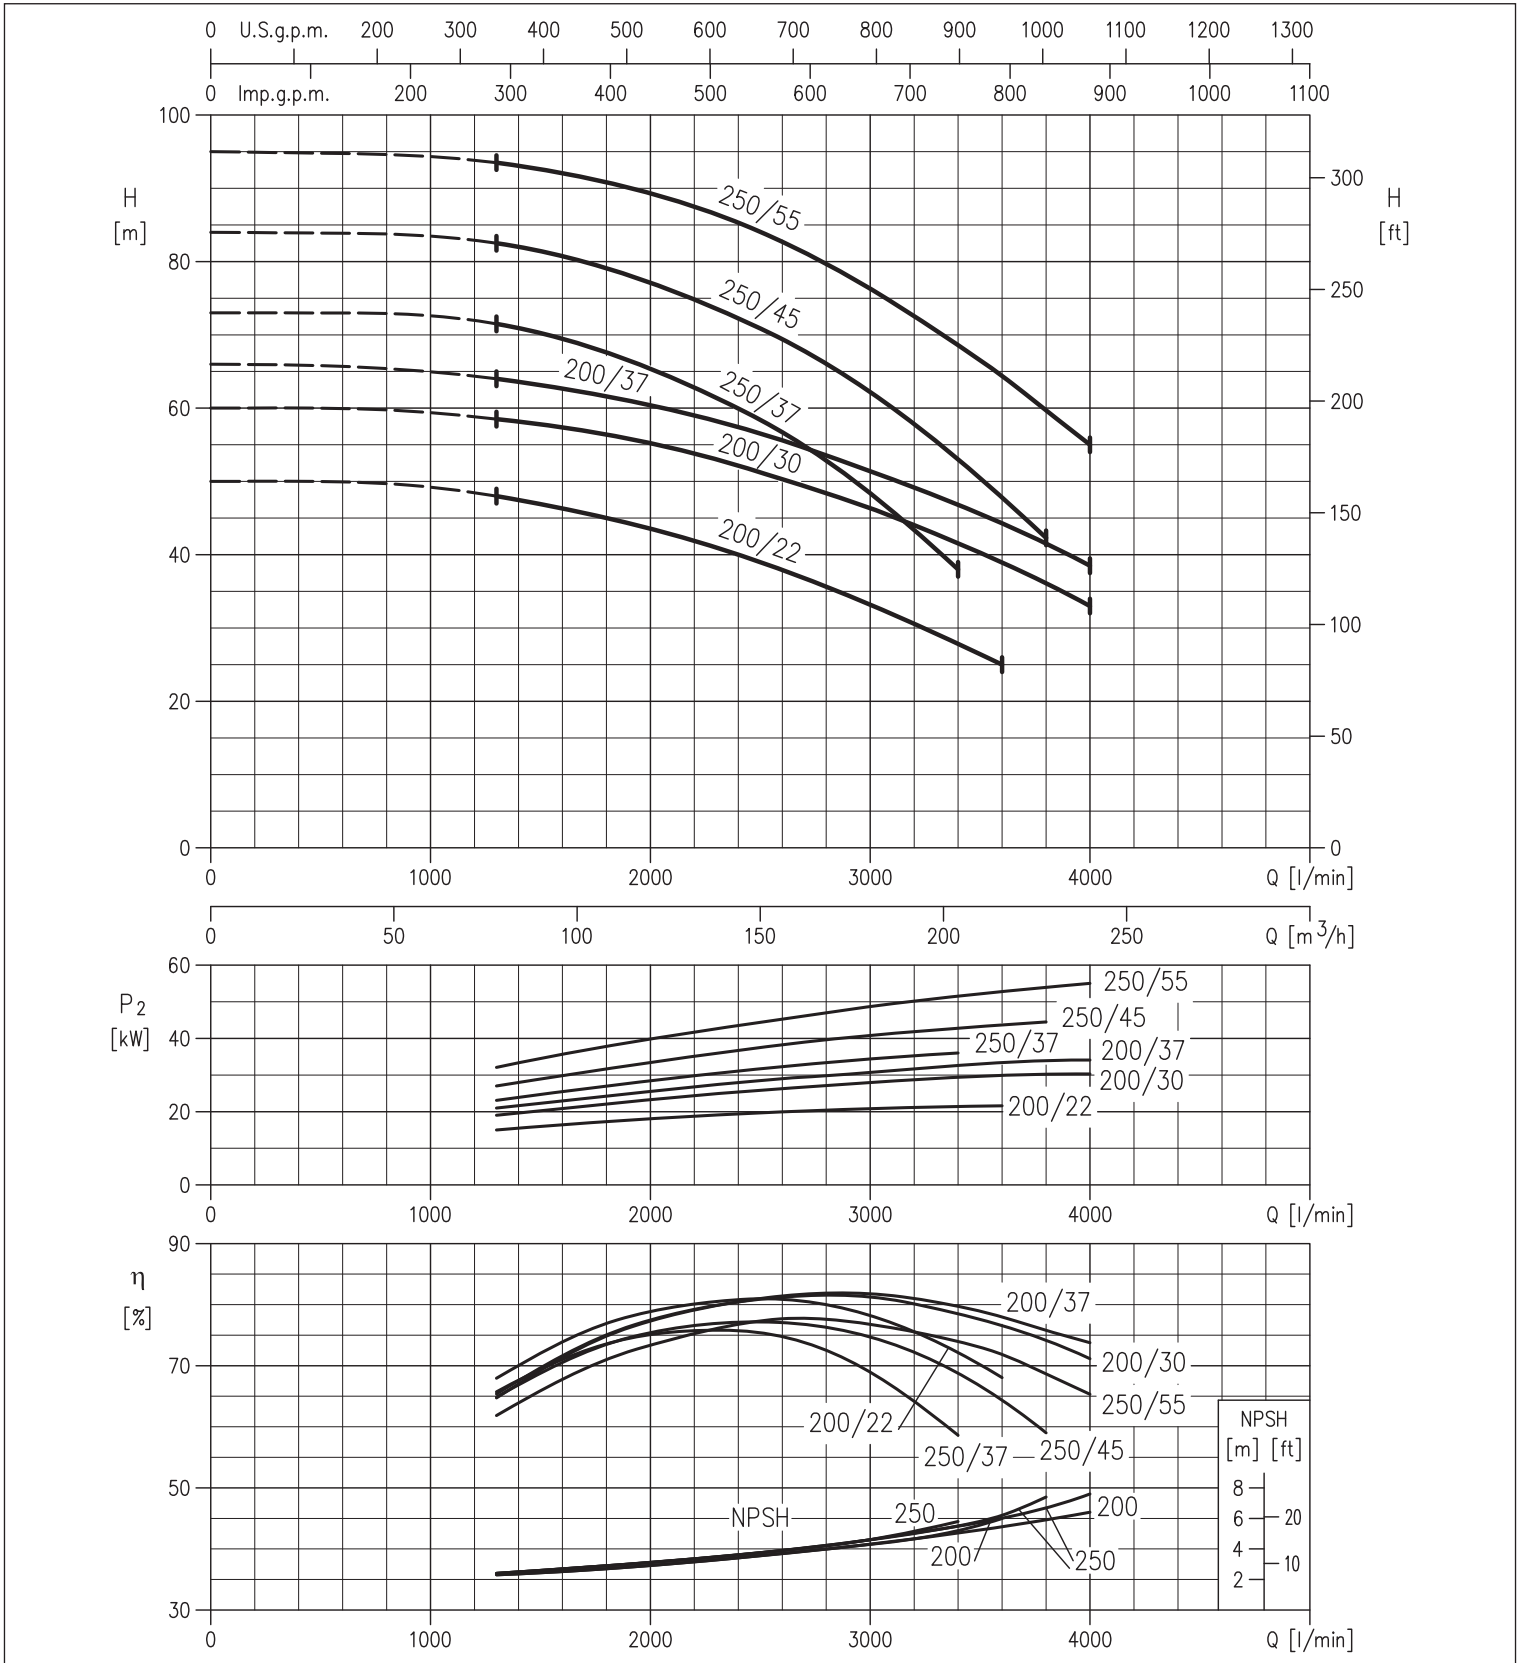


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)M 32, 40, 50, 65 - up to 11 kW

2 Poles

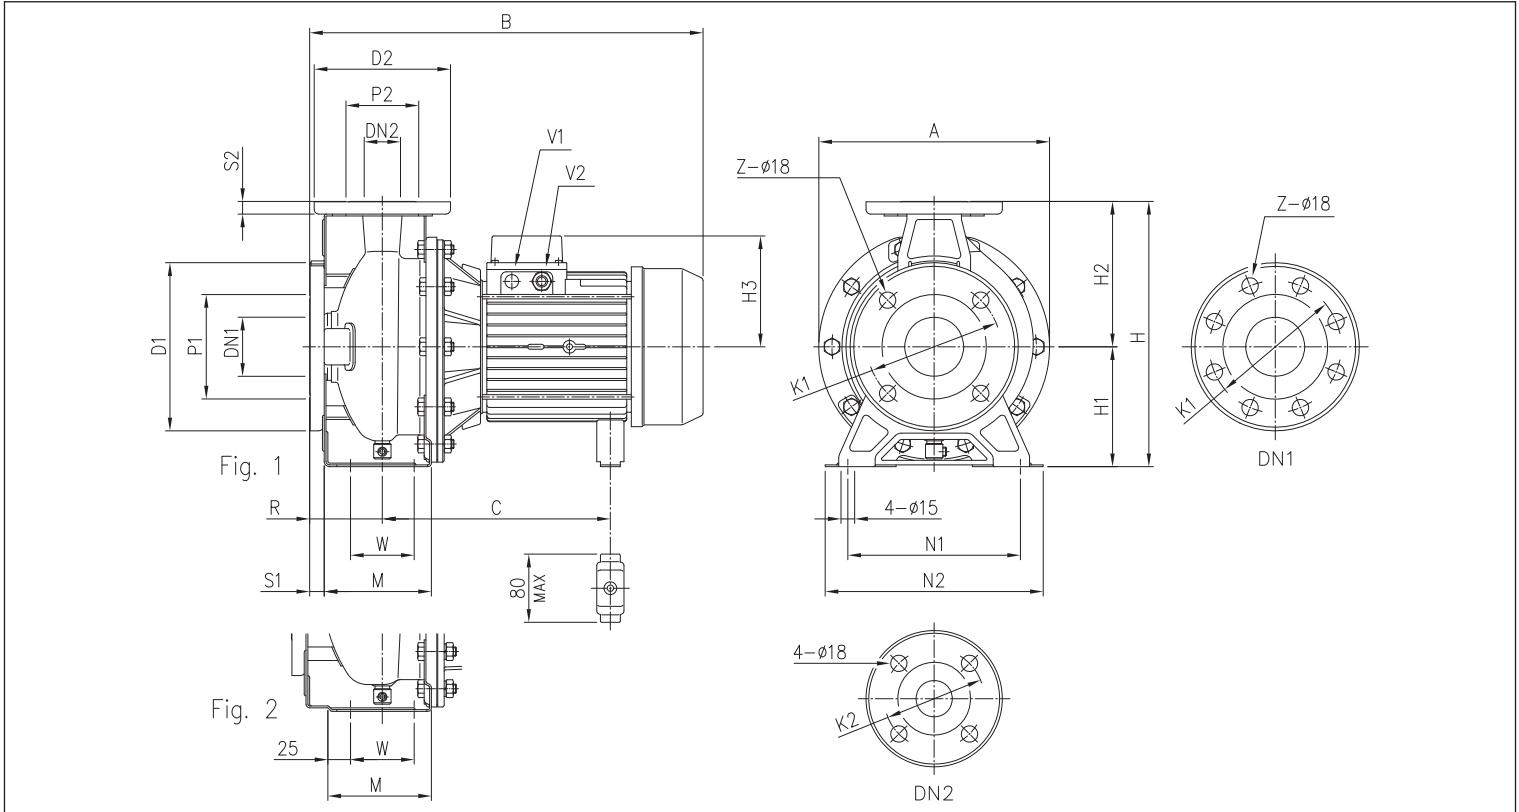

DIMENSIONS TABLE

Model	Dimensions [mm]														Fig.	H	H1	H2	H3		R	W	M	N1	N2	A	B	C	V1 [3]	V2 [3]	Weight [kg]
	DN1	P1	K1	D1	S1	[1]	[2]	DN2	P2	K2	D2	S2	[3]	[4]																	
32-125/1.1 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	252	112	140	124	141	80	70	114	140	190	213	408	219±230	-	PG 13,5	M20x1,5	19,6	
32-160/1.5 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	124	141	80	70	118	190	240	254	408	219±230	-	PG 13,5	M20x1,5	22,5	
32-160/2.2 (M)	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	124	141	80	70	118	190	240	254	408	219±230	-	PG 13,5	M20x1,5	24,6	
32-200/3.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	124	-	80	70	119	190	240	296	433	244±255	-	PG 13,5	-	32,8	
32-200/4.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	141	-	80	70	119	190	240	296	454	253	-	PG 16	-	39,5	
32-200/5.5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	150	-	80	70	119	190	240	296	475	275	PG 13,5	PG 16	-	48,5	
32-200/7.5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	150	-	80	70	119	190	240	296	517	275	PG 13,5	PG 16	-	57,0	
40-125/1.5 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	124	141	80	70	114	160	210	213	408	219±230	-	PG 13,5	M20x1,5	20,1	
40-125/2.2 (M)	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	124	141	80	70	114	160	210	213	408	219±230	-	PG 13,5	M20x1,5	22,7	
40-160/3.0	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	124	-	80	70	118	190	240	254	433	244±255	-	PG 13,5	-	28,0	
40-160/4.0	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	141	-	80	70	118	190	240	254	454	253	-	PG 16	-	35,1	
40-200/5.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	150	-	100	70	115	212	265	296	495	275	PG 13,5	PG 16	-	48,8	
40-200/7.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	150	-	100	70	115	212	265	296	537	275	PG 13,5	PG 16	-	56,2	
40-200/11	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	178	-	100	70	115	212	265	296	594	359	PG 13,5	PG 21	-	67,5	
50-125/2.2 (M)	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	124	141	100	70	114	190	240	254	428	219±230	-	PG 13,5	M20x1,5	28,1	
50-125/3.0	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	124	-	100	70	114	190	240	254	453	244±255	-	PG 13,5	-	28,6	
50-125/4.0	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	141	-	100	70	114	190	240	254	474	253	-	PG 16	-	35,2	
50-160/5.5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	150	-	100	70	115	212	265	296	495	275	PG 13,5	PG 16	-	49,1	
50-160/7.5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	150	-	100	70	115	212	265	296	537	275	PG 13,5	PG 16	-	55,5	
50-200/9.2	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	178	-	100	70	115	212	265	296	594	359	PG 13,5	PG 21	-	61,7	
50-200/11	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	178	-	100	70	115	212	265	296	594	359	PG 13,5	PG 21	-	67,5	
65-125/4	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	141	-	100	95	140	212	280	254	474	253	-	PG 16	-	40,0	
65-125/5,5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	150	-	100	95	140	212	280	254	495	275	PG 13,5	PG 16	-	52,0	
65-125/7,5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	150	-	100	95	140	212	280	254	537	275	PG 13,5	PG 16	-	58,5	
65-160/7,5	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	150	-	100	95	140	212	280	296	537	275	PG 13,5	PG 16	-	62,0	
65-160/9,2	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	178	-	100	95	140	212	280	296	594	359	PG 13,5	PG 21	-	67,0	
65-160/11	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	178	-	100	95	140	212	280	296	594	359	PG 13,5	PG 21	-	75,6	


[1] Standard [2] On request
[3] For three phase only [4] For single phase only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LM 80-160 - 11 ÷ 13 kW


2 Poles

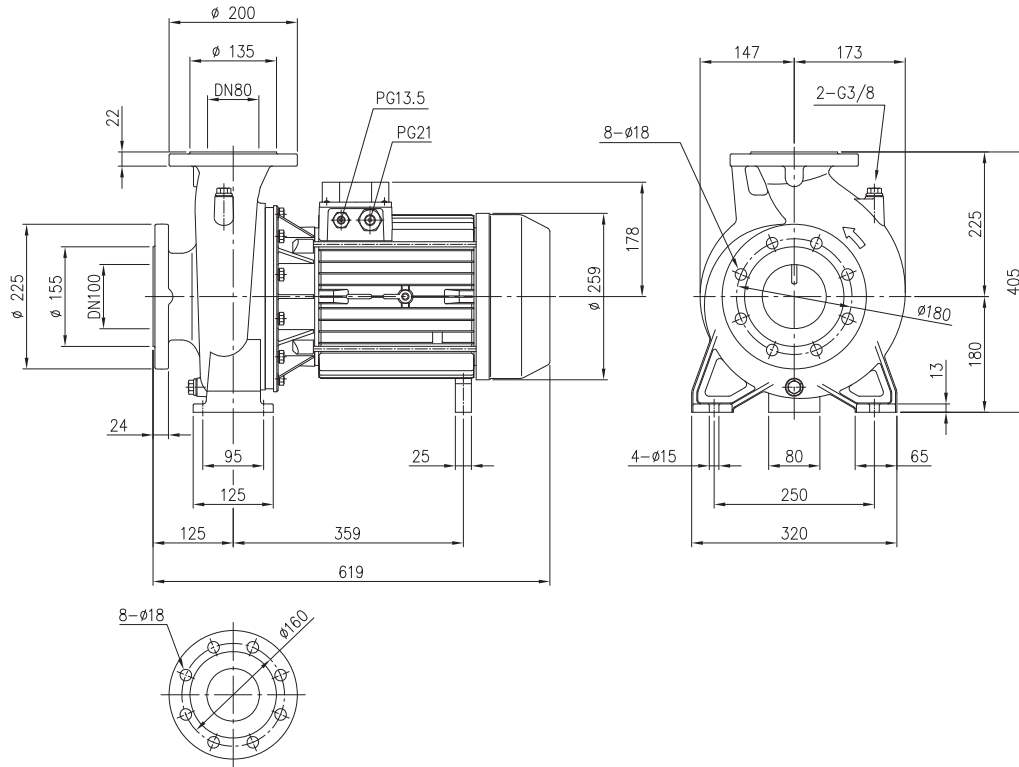

Weight
80-160/11: 94 kg
80-160/13: 97 kg

3LM 80-160 - 15 ÷ 18,5 kW

2 Poles

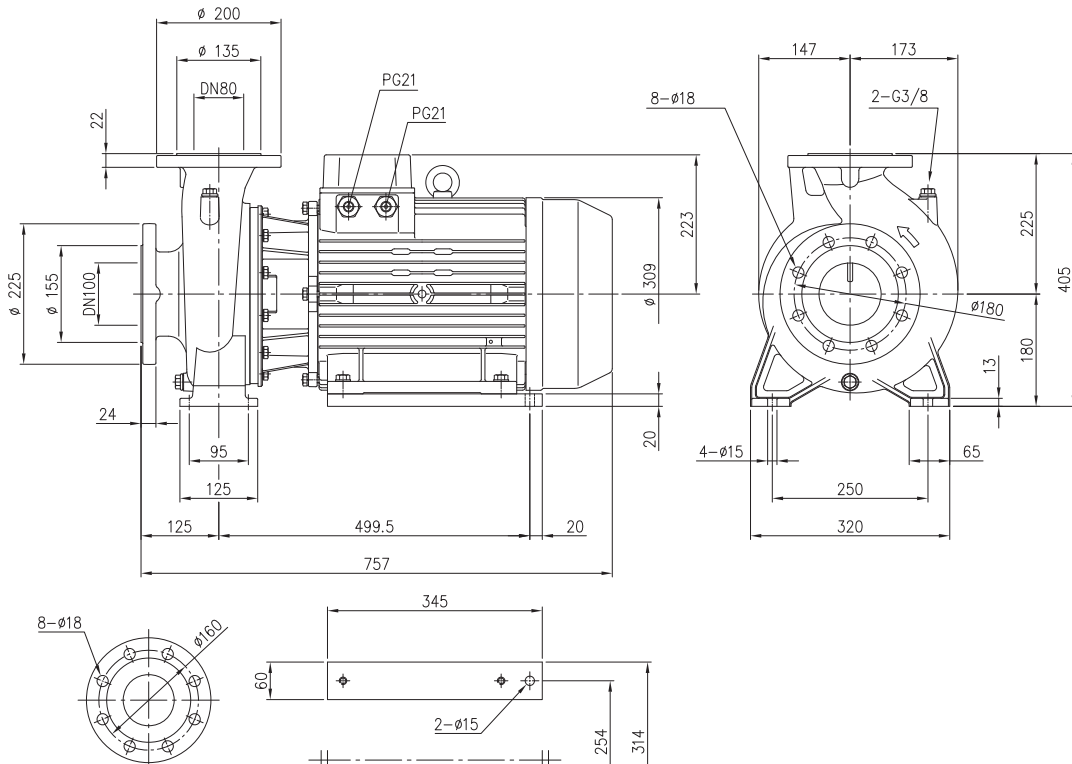


Weight
80-160/15: 130 kg
80-160/18.5: 143 kg

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S 32, 40, 50 - up to 2.2 kW

2 Poles

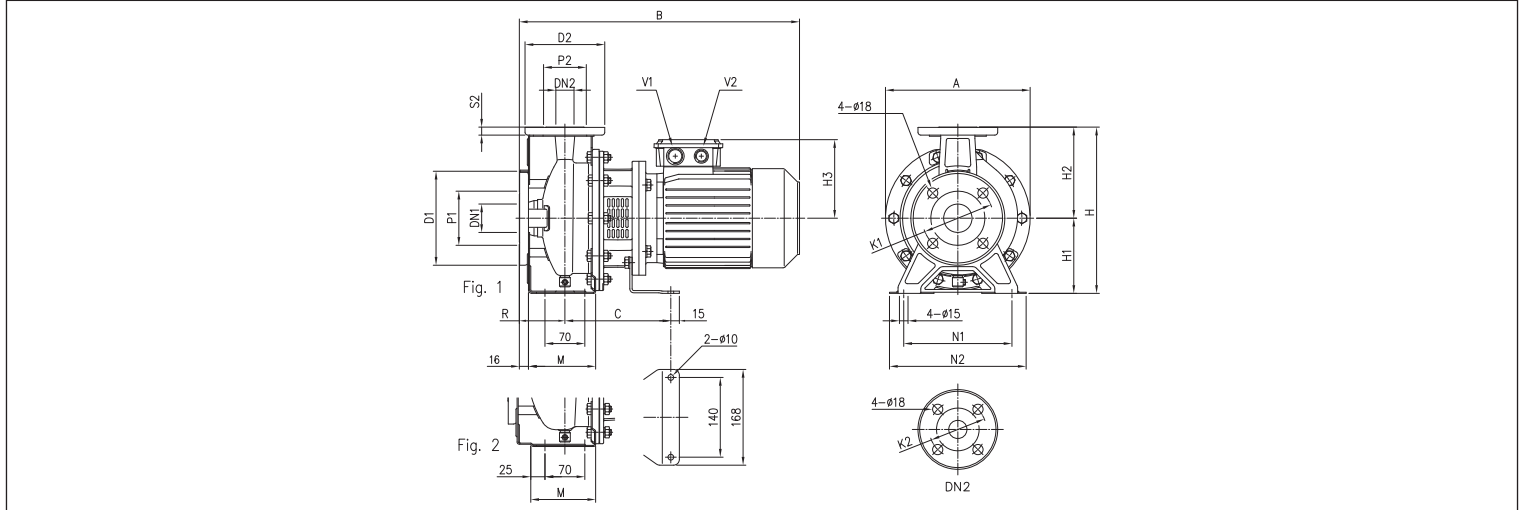


DIMENSIONS TABLE

Model	Dimensions [mm]																							Weight [kg]
	Ø DN1	Ø P1	Ø K1	Ø D1	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	R	M	N1	N2	A	B	C	V1	V2	
32-125/1.1	50	95	125	165	32	75	100	140	14	1	252	112	140	129	80	114	140	190	213	430	174	M25x1,5	M20x1,5	23,1
32-160/1.5	50	95	125	165	32	75	100	140	14	1	292	132	160	138	80	118	190	240	254	477	186	M25x1,5	M20x1,5	28,5
32-160/2.2	50	95	125	165	32	75	100	140	14	1	292	132	160	138	80	118	190	240	254	477	186	M25x1,5	M20x1,5	32,4
40-125/1.5	65	115	145	185	40	80	110	150	14	1	252	112	140	138	80	114	160	210	213	477	186	M25x1,5	M20x1,5	26,5
40-125/2.2	65	115	145	185	40	80	110	150	14	1	252	112	140	138	80	114	160	210	213	477	186	M25x1,5	M20x1,5	29,6
50-125/2.2	65	115	145	185	50	95	125	165	16	2	292	132	160	138	100	114	190	240	254	497	186	M25x1,5	M20x1,5	32,9

3(L)S 32, 65 - 3 ÷ 4 kW

2 Poles

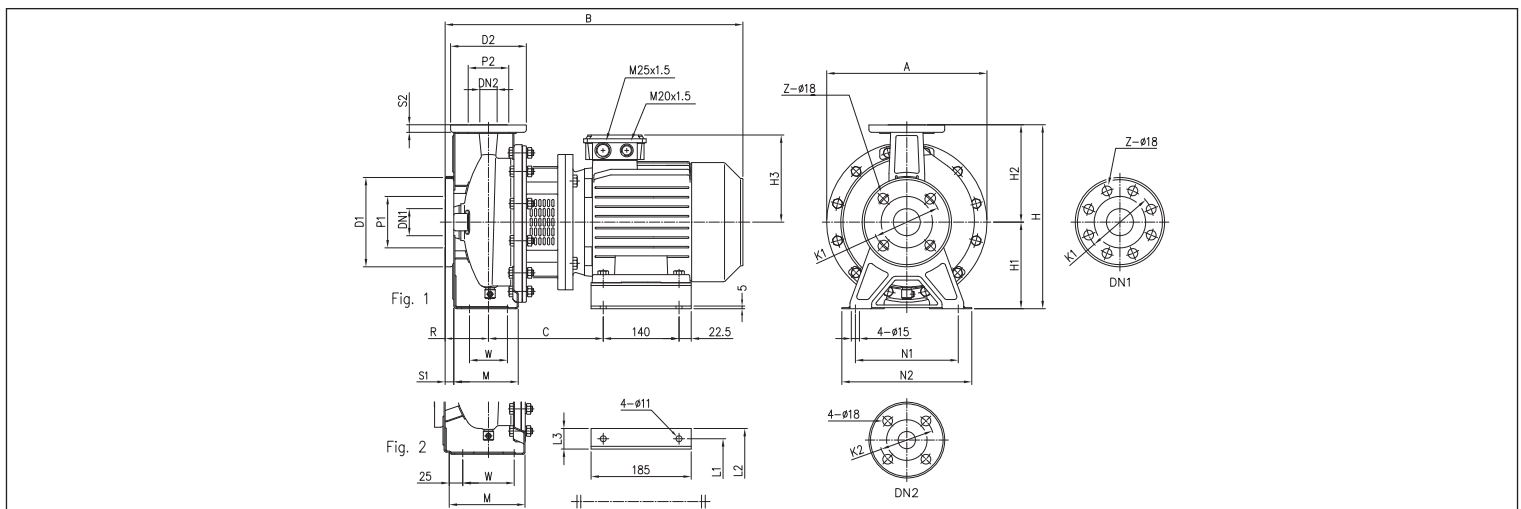

DIMENSIONS TABLE

Model	Dimensions [mm]																											Weight [kg]	
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	R	W	M	N1	N2	A	B	C	L1	L2	L3		
32-200/3.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	145	80	70	119	190	240	296	528	205	160	202	42	43,4
32-200/4.0	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	161	80	70	119	190	240	296	550	212	190	228	38	45,9
65-125/4.0	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	161	100	95	140	212	280	254	570	212	190	228	38	47,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S 32, 40, 50, 65 - up to 65-200

2 Poles

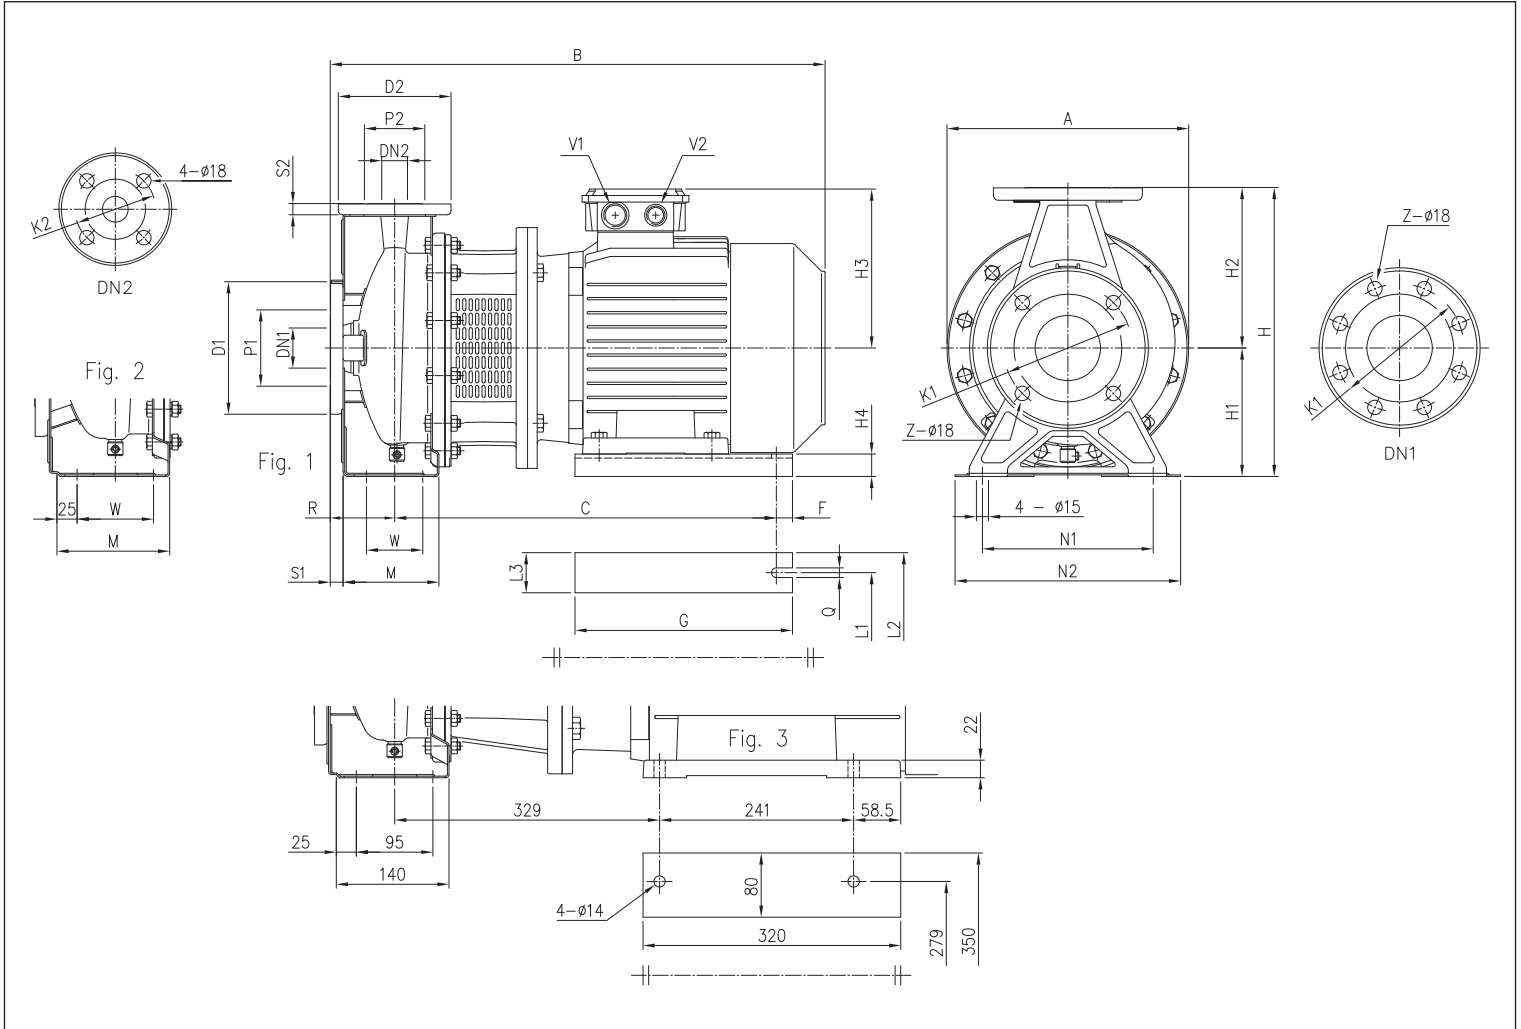

DIMENSIONS TABLE

Model	Dimensions [mm]																												Weight [kg]								
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z [1] [2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	H4	R	W	M	N1	N2	A	B	C	F	G	Q		L1	L2	L3	V1	V2			
32-200/5.5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	195	28	80	70	119	190	240	300	607	479	15	270	12	216	266	50	M32x1,5	M32x1,5	62,8		
32-200/7.5	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	195	28	80	70	119	190	240	300	607	479	15	270	12	216	266	50	M32x1,5	M32x1,5	74,6		
40-160/3.0	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	145	32	80	70	118	190	240	254	528	388	15	220	12	160	200	40	M25x1,5	M20x1,5	39,0		
40-160/4.0	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	161	20	80	70	118	190	240	254	550	395	15	220	12	190	240	50	M25x1,5	M20x1,5	41,5		
40-200/5.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	63,2		
40-200/7.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	69,6		
50-125/3.0	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	145	32	100	70	114	190	240	254	548	388	15	220	12	160	200	40	M25x1,5	M20x1,5	42,0		
50-125/4.0	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	161	20	100	70	114	190	240	254	570	395	15	220	12	190	240	50	M25x1,5	M20x1,5	42,5		
50-160/5.5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	63,8		
50-160/7.5	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	195	28	100	70	115	212	265	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	69,6		
50-200/9.2	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	195	28	100	70	115	212	265	300	667	479	15	270	12	216	266	50	M32x1,5	M32x1,5	79,7		
65-125/5.5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	60,0		
65-125/7.5	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	67,0		
65-160/7.5	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	195	28	100	95	140	212	280	300	627	479	15	270	12	216	266	50	M32x1,5	M32x1,5	70,0		
65-160/9.2	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	195	28	100	95	140	212	280	300	667	479	15	270	12	216	266	50	M32x1,5	M32x1,5	77,0		
65-200/15	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	238	20	100	95	140	250	320	350	808	621	20	350	14	254	314	60	M40x1,5	M40x1,5	128,0		
65-200/18.5	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	238	20	100	95	140	250	320	350	852	621	20	350	14	254	314	60	M40x1,5	M40x1,5	141,0		
65-200/22	80	134	160	200	18	8	4	65	115	145	185	16	3	405	180	225	245	-	100	-	-	250	320	350	888	-	-	-	-	-	-	-	-	-	M40x1,5	M40x1,5	160,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S 40, 50, 65 - 11 ÷ 15 kW

2 Poles

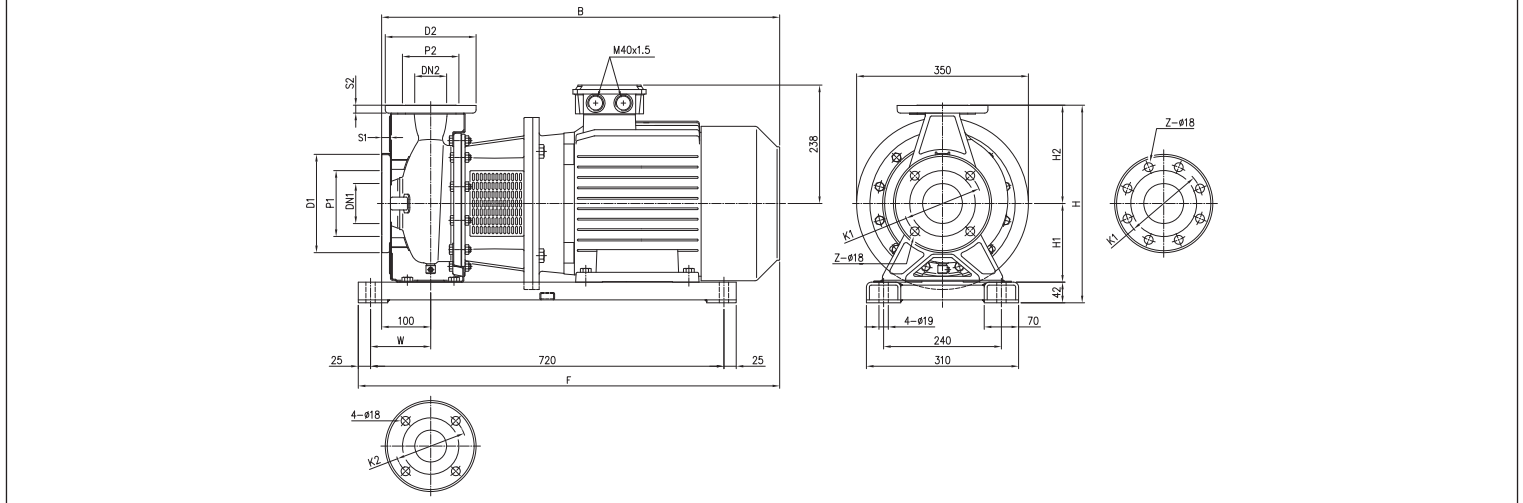


DIMENSIONS TABLE

Model	Dimensions [mm]																			Weight [kg]
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	[1]	Z	[2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	H	H1	H2	W	B	F	
40-200/11	65	115	145	185	16	4	-	40	80	110	150	14	382	160	180	110	798	833	107,0	
50-200/11	65	115	145	185	16	4	-	50	95	125	165	16	402	160	200	110	798	833	107,0	
50-200/15	65	115	145	185	16	4	-	50	95	125	165	16	402	160	200	110	798	833	131,0	
65-160/11	80	134	160	200	18	8	4	65	115	145	185	16	402	160	200	122.5	798	846	76,0	
65-160/15	80	134	160	200	18	8	4	65	115	145	185	16	402	160	200	122.5	808	856	104,0	

[1] Standard
[2] On request

3LS 80-160

2 Poles

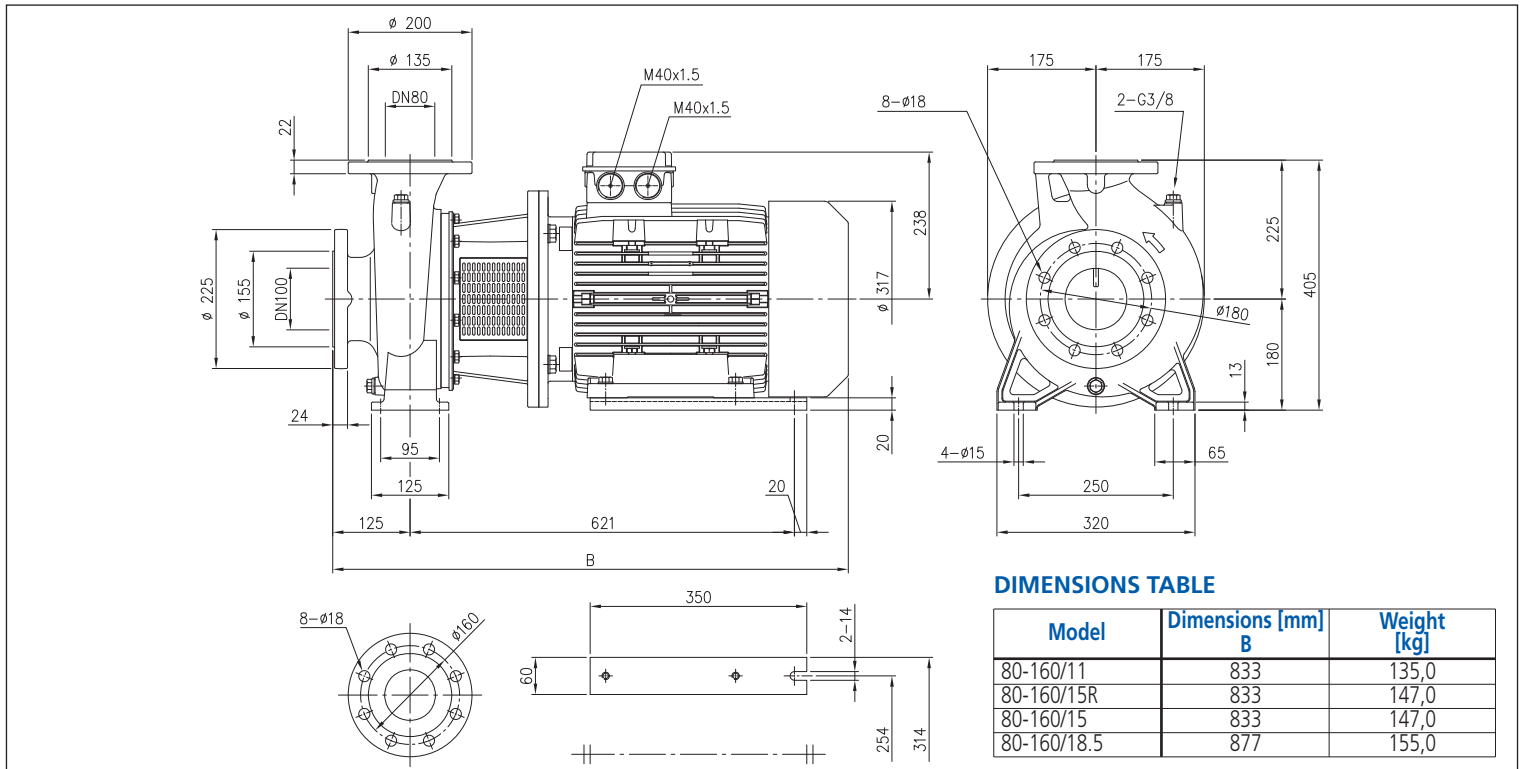

DIMENSIONS TABLE


Model	Dimensions [mm] B	Weight [kg]
80-160/11	833	135,0
80-160/15R	833	147,0
80-160/15	833	147,0
80-160/18.5	877	155,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS 65-250, 80

2 Poles

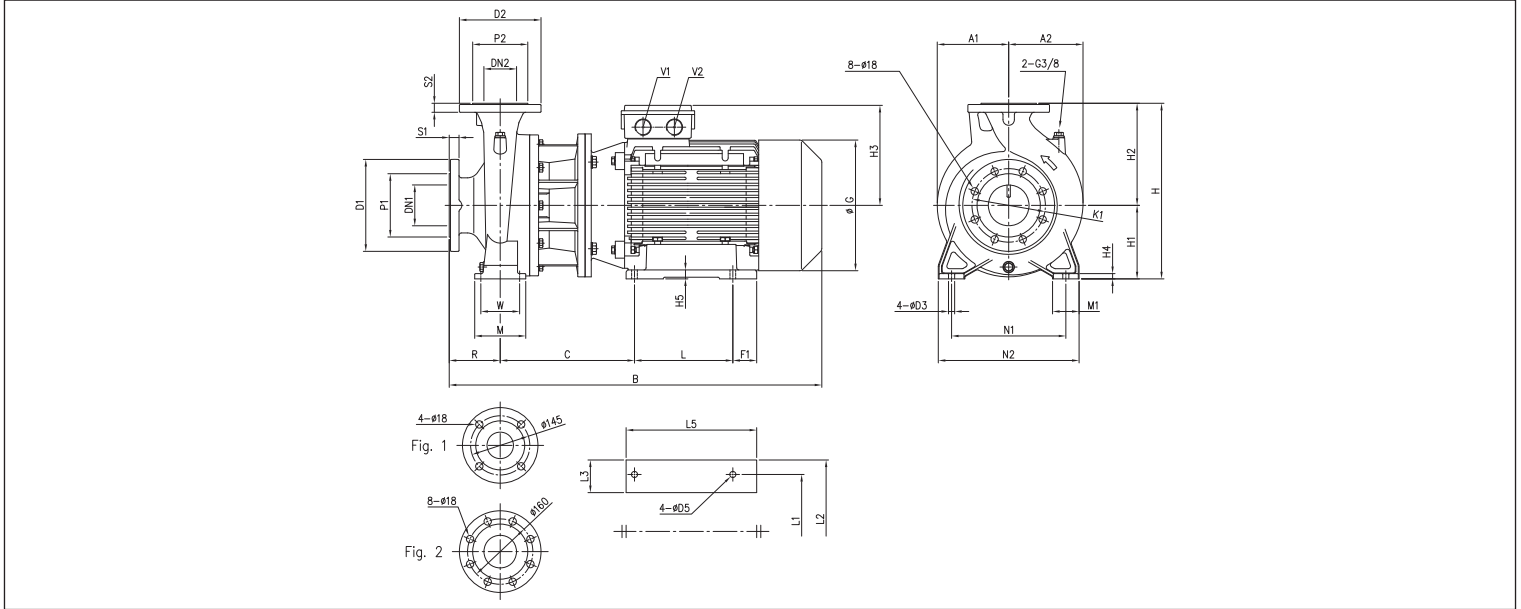


DIMENSIONS TABLE

Model	Dimensions [mm]																												Weight [kg]								
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	H5	R	W	N1	N2	M	M1	L	L1	L2	L3	L5	A1	A2		B	C	F1	G	D3	D5	V1	V2
65-250/30	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	310	15	25	100	120	280	360	160	80	305	318	395	70	370	200	200	968	341	32.5	396	19	17	M50x1,5	M50x1,5	303,0
65-250/37	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	310	15	25	100	120	280	360	160	80	305	318	395	70	370	200	200	968	341	32.5	396	19	17	M50x1,5	M50x1,5	320,0
80-200/22	100	155	180	225	24	65 Fig. 2	135	200	22	430	180	250	245	13	22	125	95	280	345	125	65	241	279	350	80	320	175	182	913	329	58.5	320	15	14	M40x1,5	M40x1,5	200,0
80-250/37	100	155	180	225	24	65 Fig. 2	135	200	22	480	200	280	310	15	25	125	120	315	400	160	80	305	318	395	70	370	200	200	1021	369	32.5	396	19	17	M50x1,5	M50x1,5	335,0

3LS 80

2 Poles

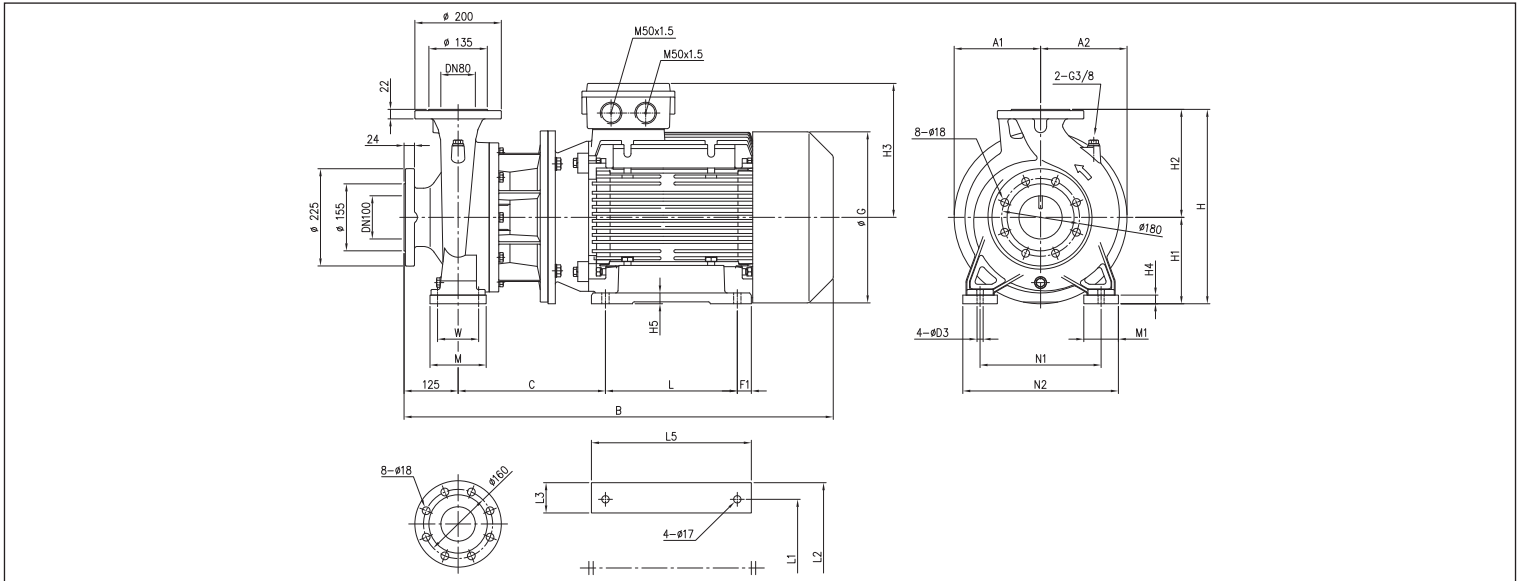

DIMENSIONS TABLE


Model	Dimensions [mm]																				Weight [kg]			
	H	H1	H2	H3	H4	H5	W	N1	N2	M	M1	L	L1	L2	L3	L5	A1	A2	B	C		F1	G	D3
80-200/30	450	200	250	310	20	25	95	280	360	130	80	305	318	395	70	370	200	200	993	341	32.5	396	14	306,0
80-200/37	450	200	250	310	20	25	95	280	360	130	80	305	318	395	70	370	200	200	993	341	32.5	396	14	325,0
80-250/45	505	225	280	335	25	28	120	315	415	165	100	311	356	435	75	393	225	225	1051	385	41	435	18	401,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S 32, 40, 50, 65 - up to 65-200

2 Poles

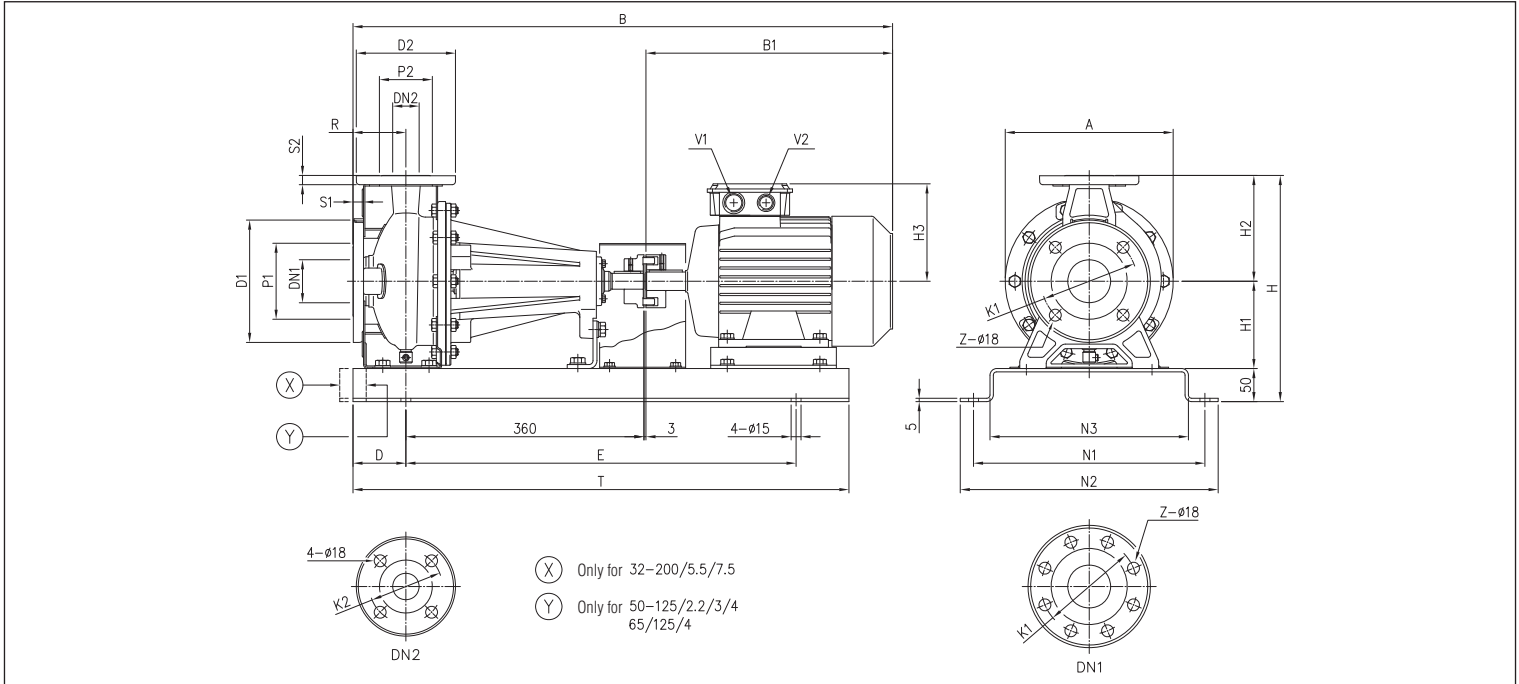

DIMENSIONS TABLE

Model	Dimensions [mm]																											Weight [kg]	
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	H	H1	H2	H3	R	A	B	B1	D	E	N1	N2	N3	T	V1		V2
32-125/1.1	50	95	125	165	16	4	-	32	75	100	140	14	302	112	140	129	80	213	715	272	80	550	300	340	250	710	M25x1,5	M20x1,5	43,5
32-160/1.5	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	138	80	254	760	317	80	590	350	390	300	750	M25x1,5	M20x1,5	51,0
32-160/2.2	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	138	80	254	760	317	80	590	350	390	300	750	M25x1,5	M20x1,5	53,5
32-200/3	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	145	80	296	809	366	80	590	350	390	300	750	M25x1,5	M20x1,5	68,0
32-200/4	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	161	80	296	831	388	80	590	350	390	300	750	M25x1,5	M20x1,5	72,0
32-200/5.5	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	195	80	296	885	442	100	650	350	390	300	850	M32x1,5	M32x1,5	88,0
32-200/7.5	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	195	80	296	885	442	100	650	350	390	300	850	M32x1,5	M32x1,5	99,8
40-125/1.5	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	138	80	213	760	317	80	550	300	340	250	710	M25x1,5	M20x1,5	48,5
40-125/2.2	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	138	80	213	760	317	80	550	300	340	250	710	M25x1,5	M20x1,5	51,0
40-160/3	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	145	80	254	809	366	80	590	350	390	300	750	M25x1,5	M20x1,5	77,5
40-160/4	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	161	80	254	831	388	80	590	350	390	300	750	M25x1,5	M20x1,5	64,5
40-200/5.5	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	89,0
40-200/7.5	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	94,5
40-200/11	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	117,0
50-125/2.2	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	138	100	254	780	317	80	550	350	390	300	710	M25x1,5	M20x1,5	75,0
50-125/3	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	145	100	254	829	366	80	590	350	390	300	750	M25x1,5	M20x1,5	79,0
50-125/4	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	161	100	254	851	388	80	590	350	390	300	750	M25x1,5	M20x1,5	81,5
50-160/5.5	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	89,0
50-160/7.5	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	195	100	296	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	94,5
50-200/9.2	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	195	100	296	945	482	100	650	350	390	300	850	M32x1,5	M32x1,5	100,0
50-200/11	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	117,5
50-200/15	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	125,4
65-125/4	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	161	100	254	851	388	80	590	350	390	300	750	M25x1,5	M20x1,5	82,0
65-125/5.5	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	195	100	254	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	90,0
65-125/7.5	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	195	100	254	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	97,0
65-160/7.5	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	195	100	296	905	442	100	650	350	390	300	850	M32x1,5	M32x1,5	103,0
65-160/9.2	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	195	100	296	945	482	100	650	350	390	300	850	M32x1,5	M32x1,5	107,0
65-160/11	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	114,0
65-160/15	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	119,0
65-200/15	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	238	100	296	1073	610	100	800	380	420	330	1000	M40x1,5	M40x1,5	127,0
65-200/18.5	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	238	100	296	1117	654	100	800	380	420	330	1000	M40x1,5	M40x1,5	139,0
65-200/22	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	245	100	296	1153	690	100	800	410	450	360	1000	M40x1,5	M40x1,5	182,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3LP 65-250, 80

2 Poles

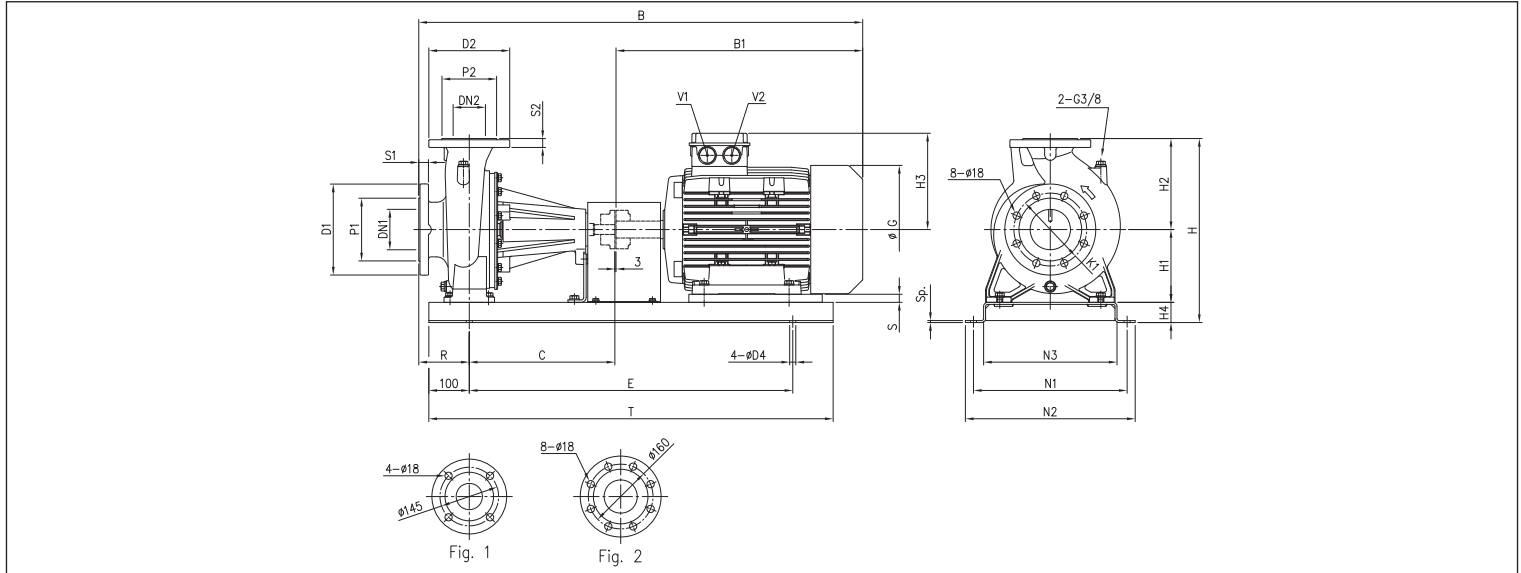


DIMENSIONS TABLE

Model	Dimensions [mm]																										Weight [kg]				
	DN1	P1	k1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	R	N1	N2	N3	B	B1	C	G	E	T	S	D4		Sp.	V1	V2	
65-250/30	80	135	160	200	22	65	Fig. 1	120	185	20	510	200	250	310	60	100	530	590	460	1343	770	470	396	1000	1200	-	19	8	M50x1,5	M50x1,5	354,0
65-250/37	80	135	160	200	22	65	Fig. 1	120	185	20	510	200	250	310	60	100	530	590	460	1343	770	470	396	1000	1200	-	19	8	M50x1,5	M50x1,5	373,0
80-160/11	100	155	180	225	24	80	Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1,5	M40x1,5	164,0
80-160/15R	100	155	180	225	24	80	Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1,5	M40x1,5	176,0
80-160/15	100	155	180	225	24	80	Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1098	610	360	317	800	1000	20	15	5	M40x1,5	M40x1,5	176,0
80-160/18.5	100	155	180	225	24	80	Fig. 2	135	200	22	455	180	225	238	50	125	380	420	330	1142	654	360	317	800	1000	20	15	5	M40x1,5	M40x1,5	185,0
80-200/22	100	155	180	225	24	80	Fig. 2	135	200	22	490	180	250	245	60	125	530	590	460	1288	690	470	320	1000	1200	-	19	8	M40x1,5	M40x1,5	252,0
80-250/37	100	155	180	225	24	80	Fig. 2	135	200	22	540	200	280	310	60	125	530	590	460	1368	770	470	396	1000	1200	-	19	8	M50x1,5	M50x1,5	377,0

3LP 80 - 30 ÷ 45 kW

2 Poles

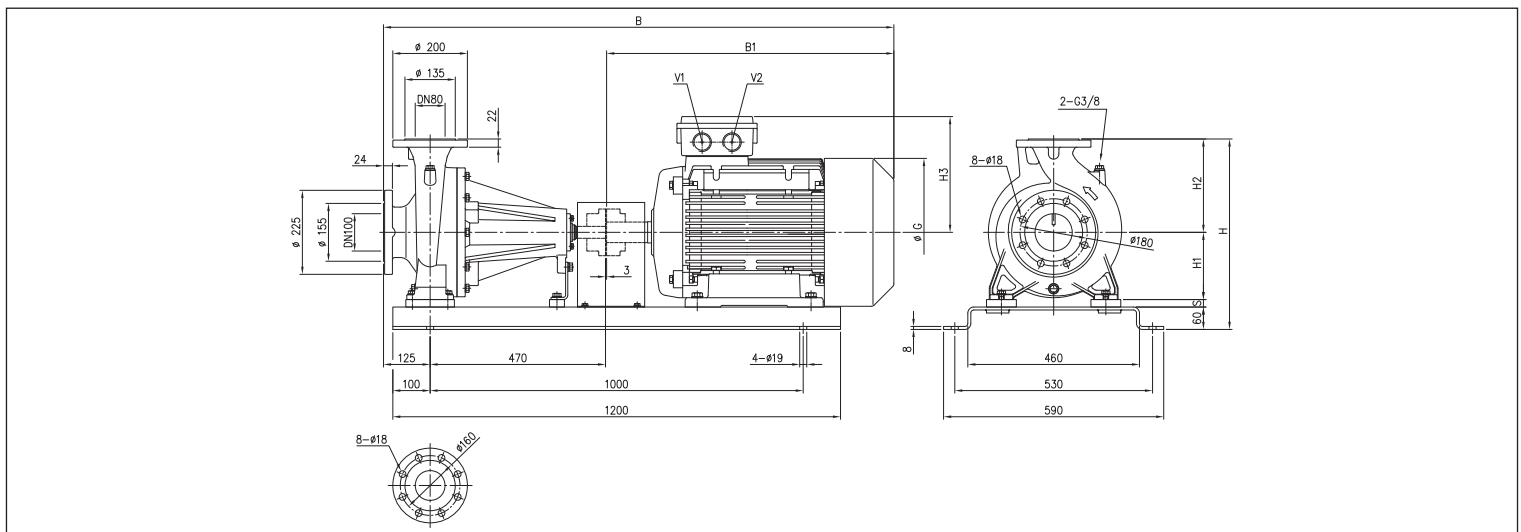

DIMENSIONS TABLE


Model	Dimensions [mm]							Weight [kg]
	H	H1	H2	H3	B	B1	G	
80-200/30	510	180	250	310	1368	770	396	356,0
80-200/37	510	180	250	310	1368	770	396	365,0
80-250/45	565	200	280	335	1398	800	435	440,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)


3LP 80-250/55

2 Poles

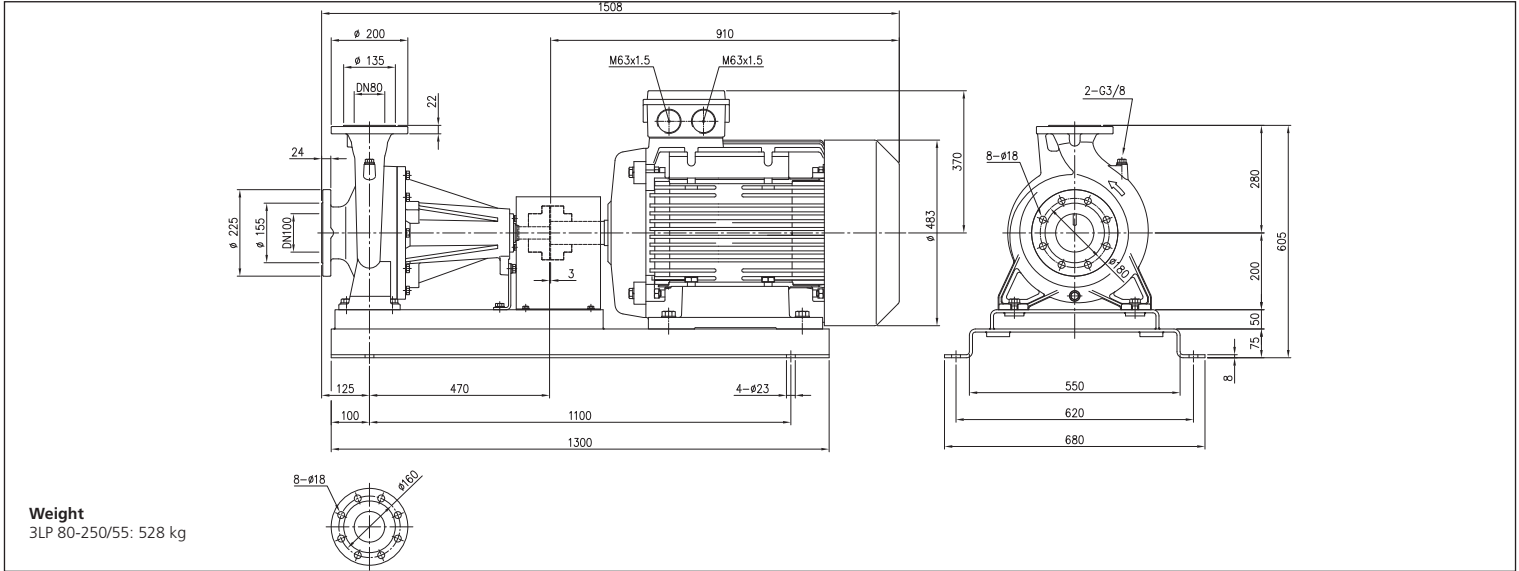

3(L)SF 32, 40, 50

2 Poles

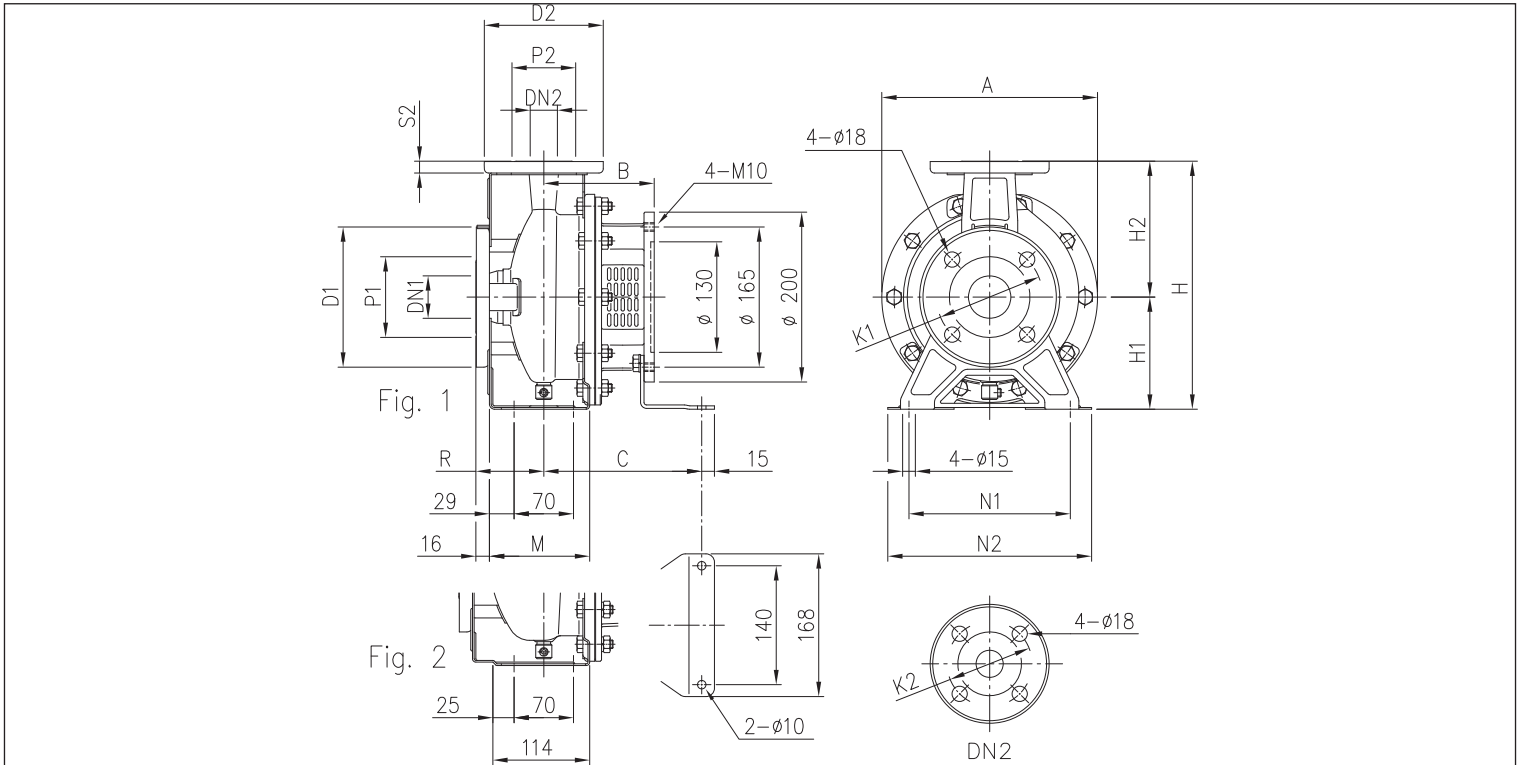

DIMENSIONS TABLE


Model	Fig.	Dimensions [mm]																			Weight [kg]
		DN1	P1	K1	D1	DN2	P2	K2	D2	S2	H	H1	H2	M	N1	N2	R	A	B	C	
32-125/1.1	1	50	95	125	165	32	75	100	140	14	252	112	140	114	140	190	80	213	118	174	13,1
32-160/1.5	1	50	95	125	165	32	75	100	140	14	292	132	160	118	190	240	80	254	130	186	17,0
32-160/2.2	1	50	95	125	165	32	75	100	140	14	292	132	160	118	190	240	80	254	130	186	17,0
40-125/1.5	1	65	115	145	185	40	80	110	150	14	252	112	140	114	160	210	80	213	130	186	14,4
40-125/2.2	1	65	115	145	185	40	80	110	150	14	252	112	140	114	160	210	80	213	130	186	14,5
50-125/2.2	2	65	115	145	185	50	95	125	165	16	292	132	160	-	190	240	100	254	130	186	20,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)SF 32, 40, 50, 65

2 Poles

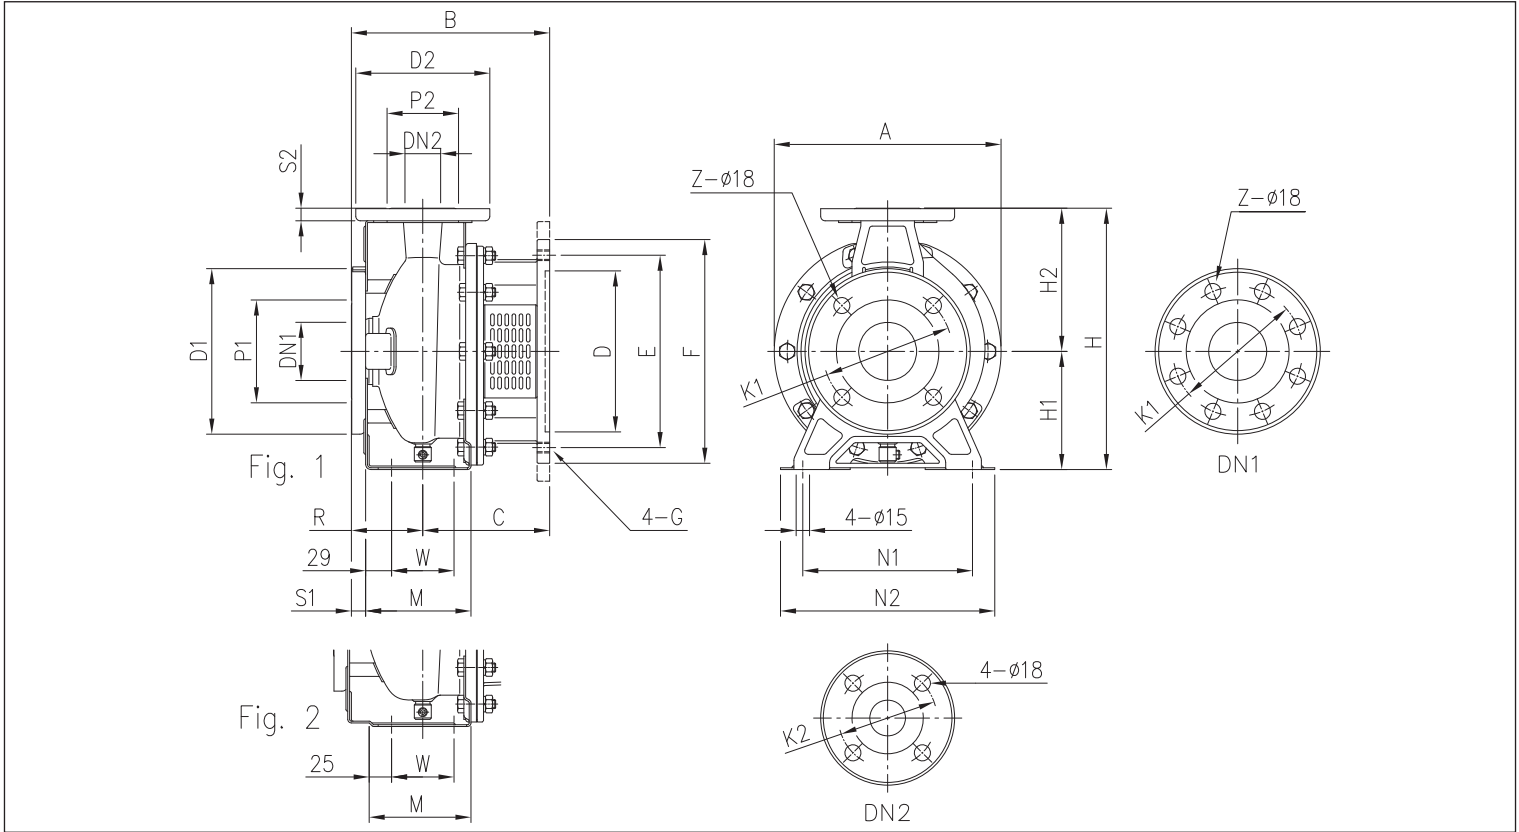

DIMENSIONS TABLE

Model	Dimensions [mm]																										Weight [kg]		
	Fig.	DN1	P1	K1	D1	S1	Z [1]	Z [2]	DN2	P2	K2	D2	S2	H	H1	H2	M	N1	N2	R	W	A	B	C	D	E		F	G
32-200/3	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	222	142	180	215	250	M12	24,0
32-200/4	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	222	142	180	215	250	M12	24,0
32-200/5.5	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	245	165	230	265	300	M12	28,0
32-200/7.5	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	245	165	230	265	300	M12	28,0
40-160/3	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	222	142	180	215	250	M12	19,5
40-160/4	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	222	142	180	215	250	M12	20,0
40-200/5.5	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	265	165	230	265	300	M12	28,0
40-200/7.5	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	265	165	230	265	300	M12	28,0
40-200/11	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	298	198	250	300	350	M16	41,5
50-125/3	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	242	142	180	215	250	M12	20,0
50-125/4	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	242	142	180	215	250	M12	20,0
50-160/5.5	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	265	165	230	265	300	M12	28,5
50-160/7.5	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	265	165	230	265	300	M12	28,5
50-200/9.2	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	265	165	230	265	300	M12	29,0
50-200/11	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	298	198	250	300	350	M16	41,5
50-200/15	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	298	198	250	300	350	M16	42,5
65-125/4	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	242	142	180	215	250	M12	26,0
65-125/5.5	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	265	165	230	265	300	M12	27,5
65-125/7.5	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	265	165	230	265	300	M12	28,5
65-160/7.5	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	265	165	230	265	300	M12	27,0
65-160/9.2	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	265	165	230	265	300	M12	30,0
65-160/11	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	298	198	250	300	350	M16	40,0
65-160/15	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	308	208	250	300	350	M16	42,0
65-200/15	2	80	134	160	200	18	8	4	65	115	145	185	16	405	180	225	140	250	320	100	95	296	308	208	250	300	350	M16	29,5
65-200/18.5	2	80	134	160	200	18	8	4	65	115	145	185	16	405	180	225	140	250	320	100	95	296	308	208	250	300	350	M16	29,5
65-200/22	2	80	134	160	200	18	8	4	65	115	145	185	16	405	180	225	140	250	320	100	95	296	308	208	250	300	350	M16	30,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)SF 65-250, 80

2 Poles

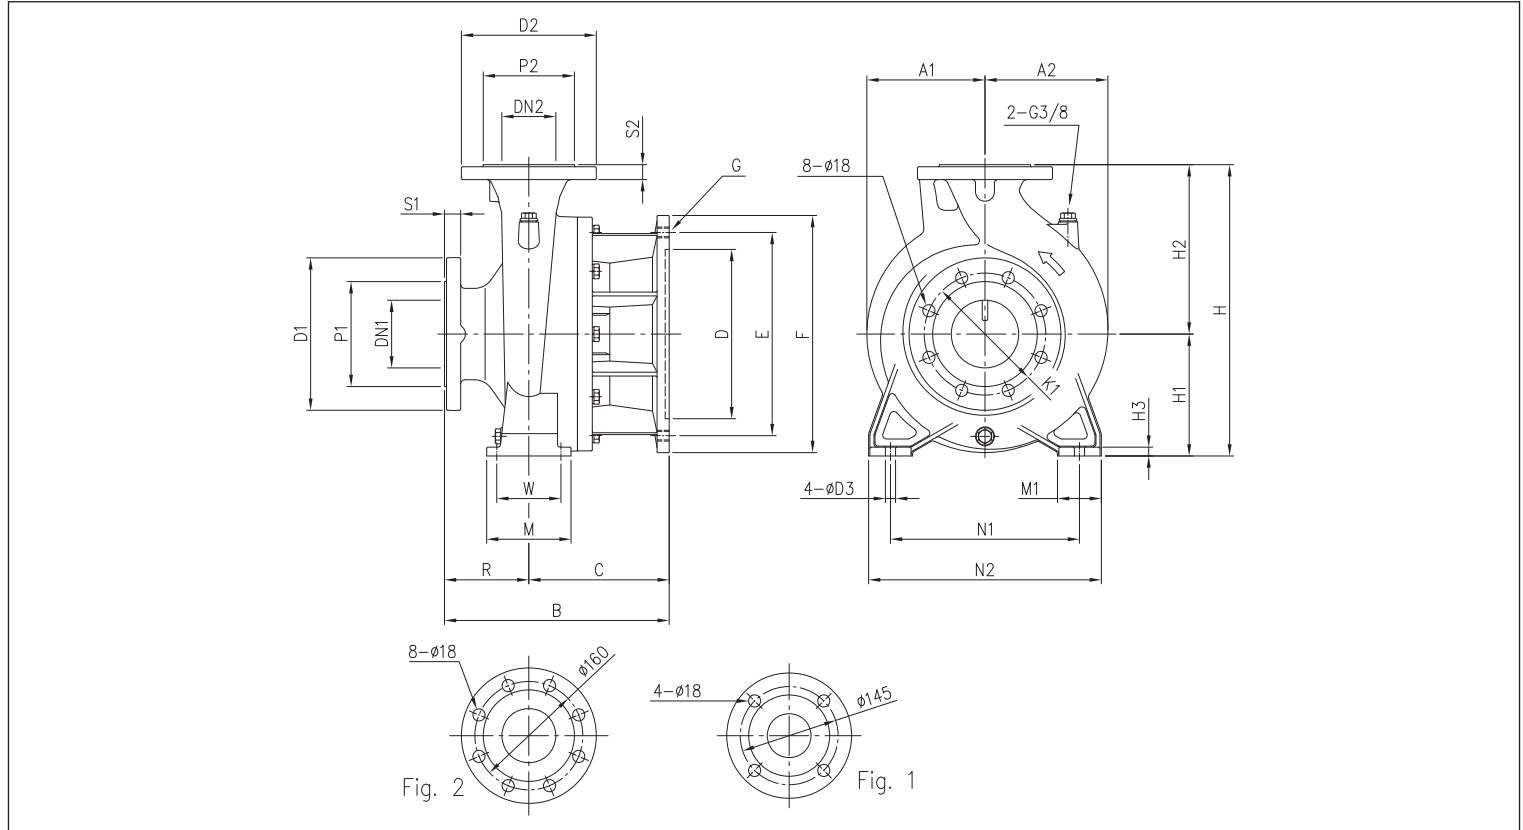

DIMENSIONS TABLE


Model	Dimensions [mm]																										Weight [kg]		
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	R	W	N1	N2	M	M1	D3	B	C	D	E	F	G		A1	A2
65-250/30	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	19	308	208	300	350	400	4 - M16	200	200	70,0
65-250/37	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	19	308	208	300	350	400	4 - M16	200	200	71,0
80-160/11	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	333	208	250	300	350	4 - M16	175	175	52,0
80-160/15R	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	333	208	250	300	350	4 - M16	175	175	52,0
80-160/15	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	333	208	250	300	350	4 - M16	175	175	52,0
80-160/18.5	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	333	208	250	300	350	4 - M16	175	175	53,0
80-200/22	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	333	208	250	300	350	4 - M16	175	182	68,0
80-200/30	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	333	208	300	350	400	4 - M16	200	200	72,0
80-200/37	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	333	208	300	350	400	4 - M16	200	200	73,0
80-250/37	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	361	236	300	350	400	4 - M16	200	200	83,0
80-250/45	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	361	236	350	400	450	8 - M16	225	225	88,0
80-250/55	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	373	248	450	500	550	8 - M16	275	275	100,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)PF 32, 40, 50, 65

2 Poles

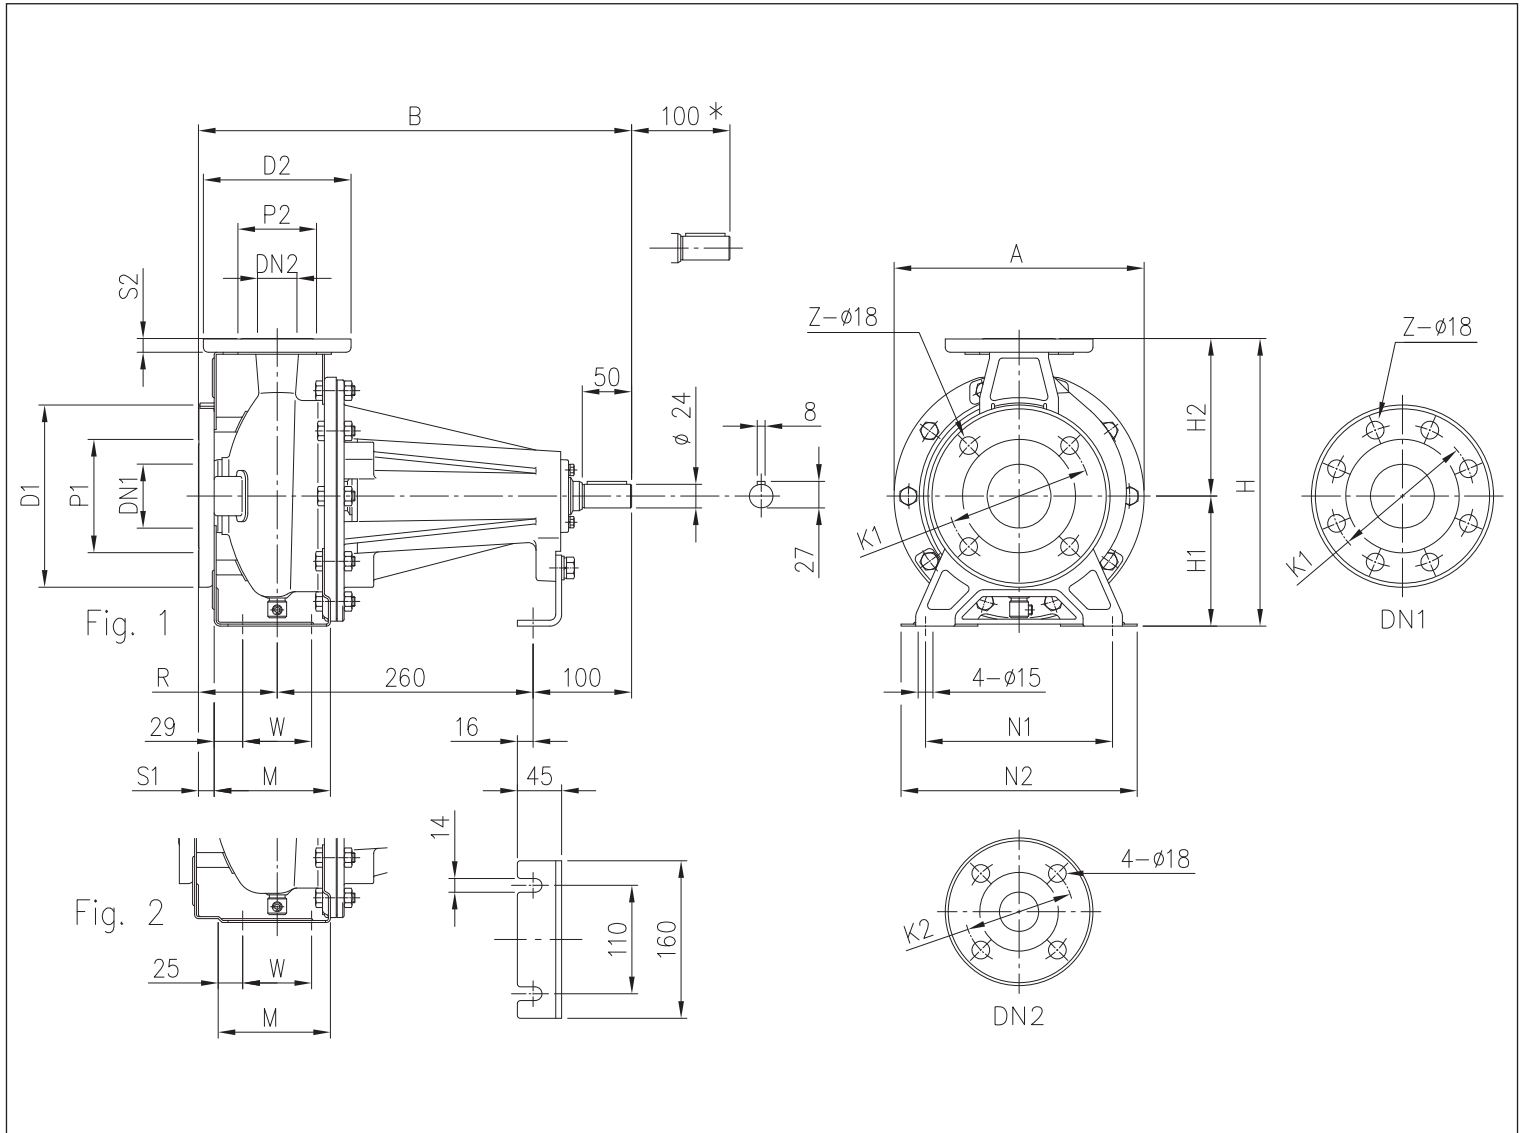

DIMENSIONS TABLE

Model	Fig.	Dimensions [mm]																							Weight [kg]
		DN1	P1	K1	D1	S1	[1]	Z	[2]	DN2	P2	K2	D2	S2	H	H1	H2	M	N1	N2	R	W	A	B	
32-125	1	50	95	125	165	16	4	-	32	75	100	140	14	252	112	140	114	140	190	80	70	213	440	17,0	
32-160	1	50	95	125	165	16	4	-	32	75	100	140	14	292	132	160	118	190	240	80	70	254	440	19,0	
32-200	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	440	27,0	
40-125	1	65	115	145	185	16	4	-	40	80	110	150	14	252	112	140	114	160	210	80	70	213	440	17,0	
40-160	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	440	19,0	
40-200	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	460	27,0	
50-125	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	460	19,0	
50-160	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	460	28,0	
50-200	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	460	27,0	
65-125	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	460	28,0	
65-160	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	460	29,0	
65-200	2	80	134	160	200	18	8	4	65	115	145	185	16	405	180	225	140	250	320	100	95	296	460	30,0	

[1] Standard
[2] On request


* Space where it is possible to disassemble the pump with spacer joint without disassembling the motor

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)PF 65-250, 80

2 Poles

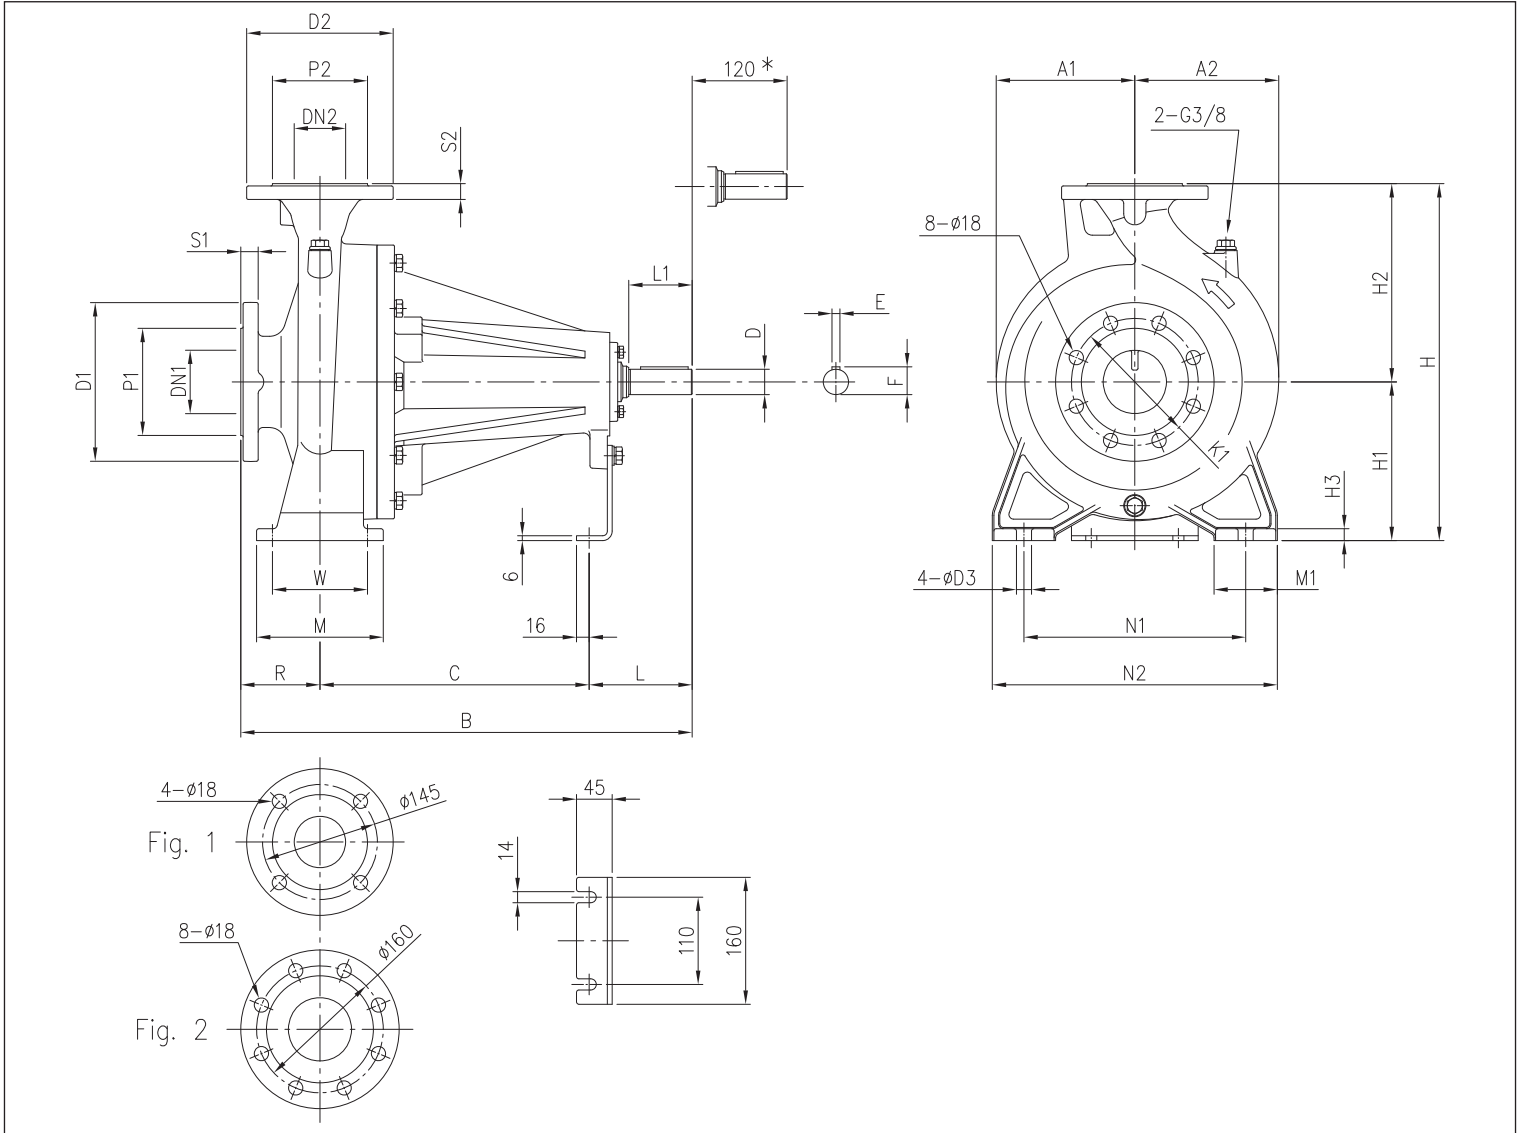

DIMENSIONS TABLE

Model	Dimensions [mm]																				Weight [kg]									
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	R	W	N1	N2	M	M1	L		L1	D	D3	E	F	A1	A2	B	C
65-250	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	130	80	32	19	10	35	175	182	570	340	82,0
80-160	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	100	50	24	15	8	27	147	173	485	260	60,0
80-200	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	130	80	32	15	10	35	175	182	595	340	83,0
80-250	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	130	80	32	19	10	35	175	192	595	340	88,0


* Space where it is possible to disassemble the pump with spacer joint without disassembling the motor.

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

Joint for 3(L)S - 3SF Series

2 Poles

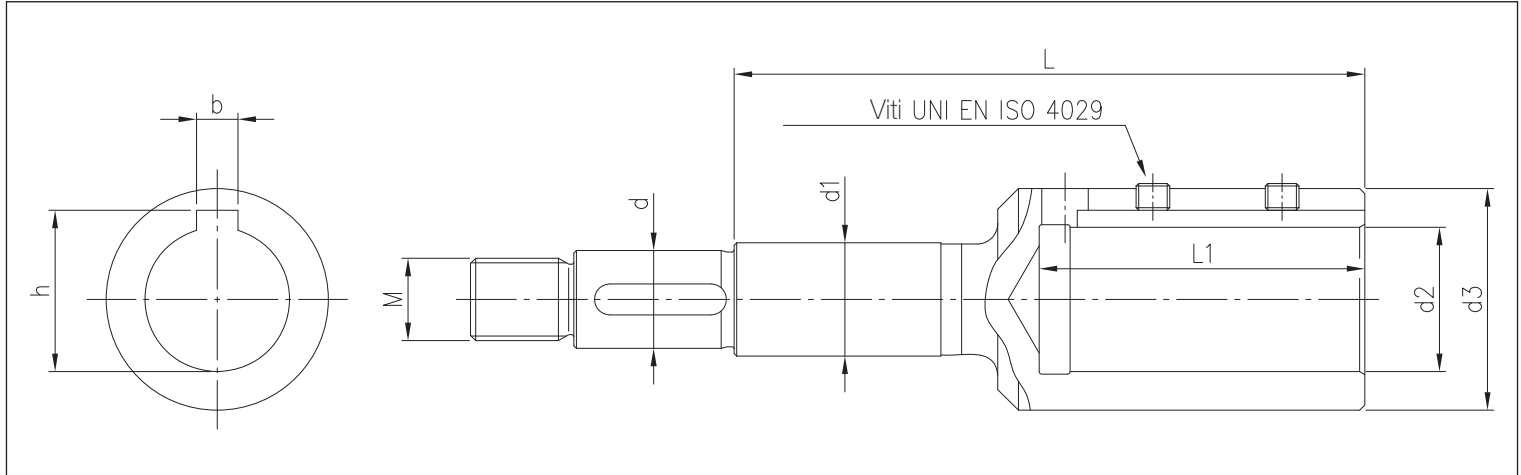

DIMENSIONS TABLE


Model	[HP]	[kW]	Motor size	Dimensions [mm]									
				d	d1	d2	d3	M	L	L1	b	h	Screws
32-125/1.1	1,5	1,1	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
32-160/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
32-160/2.2	3	2,2	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
32-200/3.0	4	3	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
32-200/4.0	5,5	4	112	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
32-200/5.5	7,5	5,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
32-200/7.5	10	7,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
40-125/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
40-125/2.2	3	2,2	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
40-160/3.0	4	3	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
40-160/4.0	5,5	4	112	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
40-200/5.5	7,5	5,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
40-200/7.5	10	7,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
40-200/11	15	11	160	19	22	42	63	M16x1,5	178	114	12	45,3	M8x8
50-125/2.2	3	2,2	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-125/3.0	4	3	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
50-125/4.0	5,5	4	112	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
50-160/5.5	7,5	5,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
50-160/7.5	10	7,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
50-200/9.2	12,5	9,2	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
50-200/11	15	11	160	19	22	42	63	M16x1,5	178	114	12	45,3	M8x8
50-200/15	20	15	160	22	22	42	63	M18x1,5	209	114	12	45,3	M8x8
65-125/4.0	5,5	4	112	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
65-125/5.5	7,5	5,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
65-125/7.5	10	7,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
65-160/7.5	10	7,5	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
65-160/9.2	12,5	9,2	132	19	22	38	58	M16x1,5	145	84	10	41,3	M8x8
65-160/11	15	11	160	19	22	42	63	M16x1,5	178	114	12	45,3	M8x8
65-160/15	20	15	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
65-200/15	20	15	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
65-200/18.5	25	18,5	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
65-200/22	30	22	180	24	30	48	72	M20x1,5	184	114	14	51,8	M10x10
65-250/30	40	30	200	24	30	55	85	M20x1,5	184	114	16	59,3	M12x12
65-250/37	50	37	200	24	30	55	85	M20x1,5	184	114	16	59,3	M12x12
80-160/11	15	11	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
80-160/15R	20	15	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
80-160/15	20	15	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
80-160/18.5	25	18,5	160	24	30	42	63	M20x1,5	184	114	12	45,3	M8x8
80-200/22	30	22	180	24	30	48	72	M20x1,5	184	114	14	51,8	M10x10
80-200/30	40	30	200	24	30	55	85	M20x1,5	184	114	16	59,3	M12x12
80-200/37	50	37	200	24	30	55	85	M20x1,5	184	114	16	59,3	M12x12
80-250/37	50	37	200	29	35	55	85	M24x2	206	114	16	59,3	M12x12
80-250/45	60	45	225	29	35	55	85	M24x2	206	114	16	59,3	M12x12
80-250/55	75	55	250	29	35	60	89	M24x2	218	144	18	64,4	M12x12

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

Joint for 3(L)P Series

2 Poles

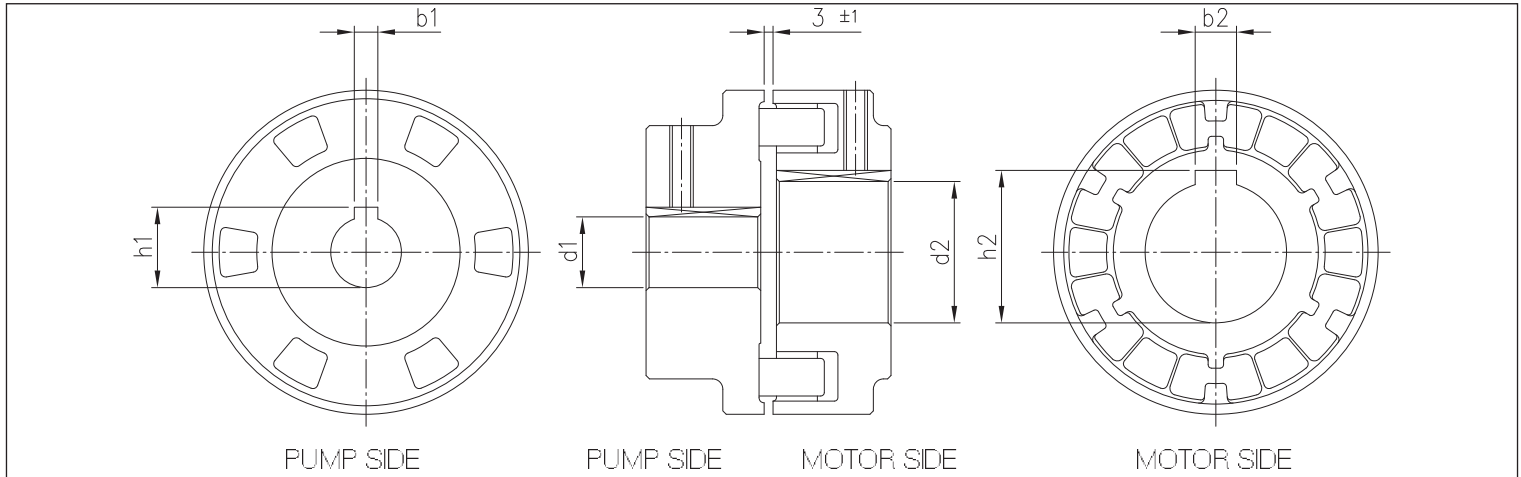

DIMENSIONS TABLE


Model	[HP]	[kW]	Motor size	Dimensions [mm]					
				d1	b1	h1	d2	b2	h2
32-125/1.1	1,5	1,1	80	24	8	27,3	19	6	21,8
32-160/1.5	2	1,5	90	24	8	27,3	24	8	27,3
32-160/2.2	3	2,2	90	24	8	27,3	24	8	27,3
32-200/3.0	4	3	100	24	8	27,3	28	8	31,3
32-200/4.0	5,5	4	112	24	8	27,3	28	8	31,3
32-200/5.5	7,5	5,5	132	24	8	27,3	38	10	41,3
32-200/7.5	10	7,5	132	24	8	27,3	38	10	41,3
40-125/1.5	2	1,5	90	24	8	27,3	24	8	27,3
40-125/2.2	3	2,2	90	24	8	27,3	24	8	27,3
40-160/3.0	4	3	100	24	8	27,3	28	8	31,3
40-160/4.0	5,5	4	112	24	8	27,3	28	8	31,3
40-200/5.5	7,5	5,5	132	24	8	27,3	38	10	41,3
40-200/7.5	10	7,5	132	24	8	27,3	38	10	41,3
40-200/11	15	11	160	24	8	27,3	42	12	45,3
50-125/2.2	3	2,2	90	24	8	27,3	24	8	27,3
50-125/3.0	4	3	100	24	8	27,3	28	8	31,3
50-125/4.0	5,5	4	112	24	8	27,3	28	8	31,3
50-160/5.5	7,5	5,5	132	24	8	27,3	38	10	41,3
50-160/7.5	10	7,5	132	24	8	27,3	38	10	41,3
50-200/9.2	12,5	9,2	132	24	8	27,3	38	10	41,3
50-200/11	15	11	160	24	8	27,3	42	12	45,3
50-200/15	20	15	160	24	8	27,3	42	12	45,3
65-125/4.0	5,5	4	112	24	8	27,3	28	8	31,3
65-125/5.5	7,5	5,5	132	24	8	27,3	38	10	41,3
65-125/7.5	10	7,5	132	24	8	27,3	38	10	41,3
65-160/7.5	10	7,5	132	24	8	27,3	38	10	41,3
65-160/9.2	12,5	9,2	132	24	8	27,3	38	10	41,3
65-160/11	15	11	160	24	8	27,3	42	12	45,3
65-160/15	20	15	160	24	8	27,3	42	12	45,3
65-200/15	20	15	160	24	8	27,3	42	12	45,3
65-200/18.5	25	18,5	160	24	8	27,3	42	12	45,3
65-200/22	30	22	180	24	8	27,3	48	14	51,8
65-250/30	40	30	200	32	10	35,3	55	16	59,3
65-250/37	50	37	200	32	10	35,3	55	16	59,3
80-160/11	15	11	160	24	8	27,3	42	12	45,3
80-160/15R	20	15	160	24	8	27,3	42	12	45,3
80-160/15	20	15	160	24	8	27,3	42	12	45,3
80-160/18.5	25	18,5	160	24	8	27,3	42	12	45,3
80-200/22	30	22	180	32	10	35,3	48	14	51,8
80-200/30	40	30	200	32	10	35,3	55	16	59,3
80-200/37	50	37	200	32	10	35,3	55	16	59,3
80-250/37	50	37	200	32	10	35,3	55	16	59,3
80-250/45	60	45	225	32	10	35,3	55	16	59,3
80-250/55	75	55	250	32	10	35,3	60	18	64,4

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)


3(L)M 32, 40, 50, 65 - up to 11 kW SECTIONAL VIEW

2 Poles

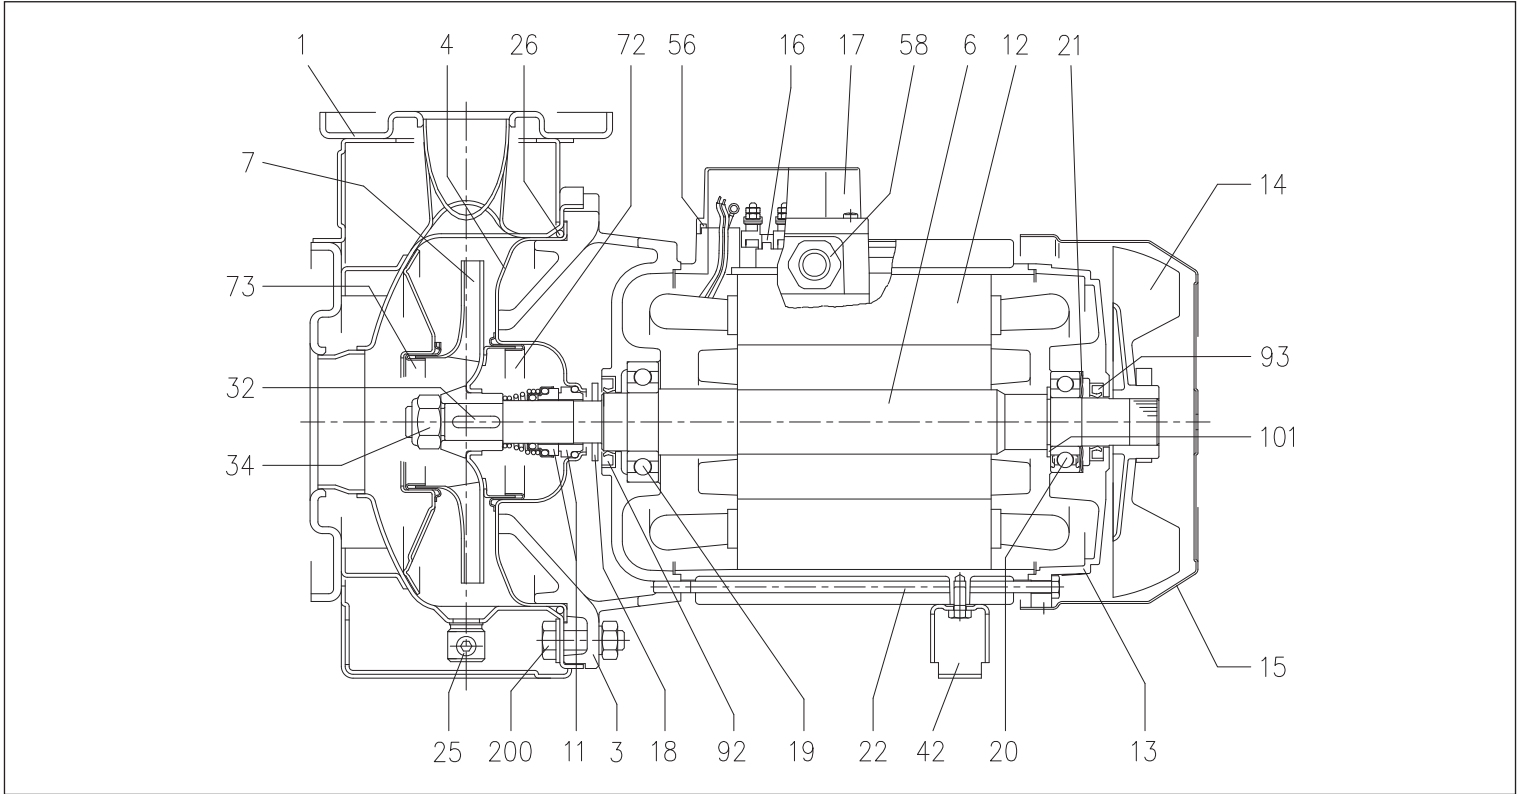

3(L)M 32, 40, 50, 65 - from 15 kW and over SECTIONAL VIEW

2 Poles

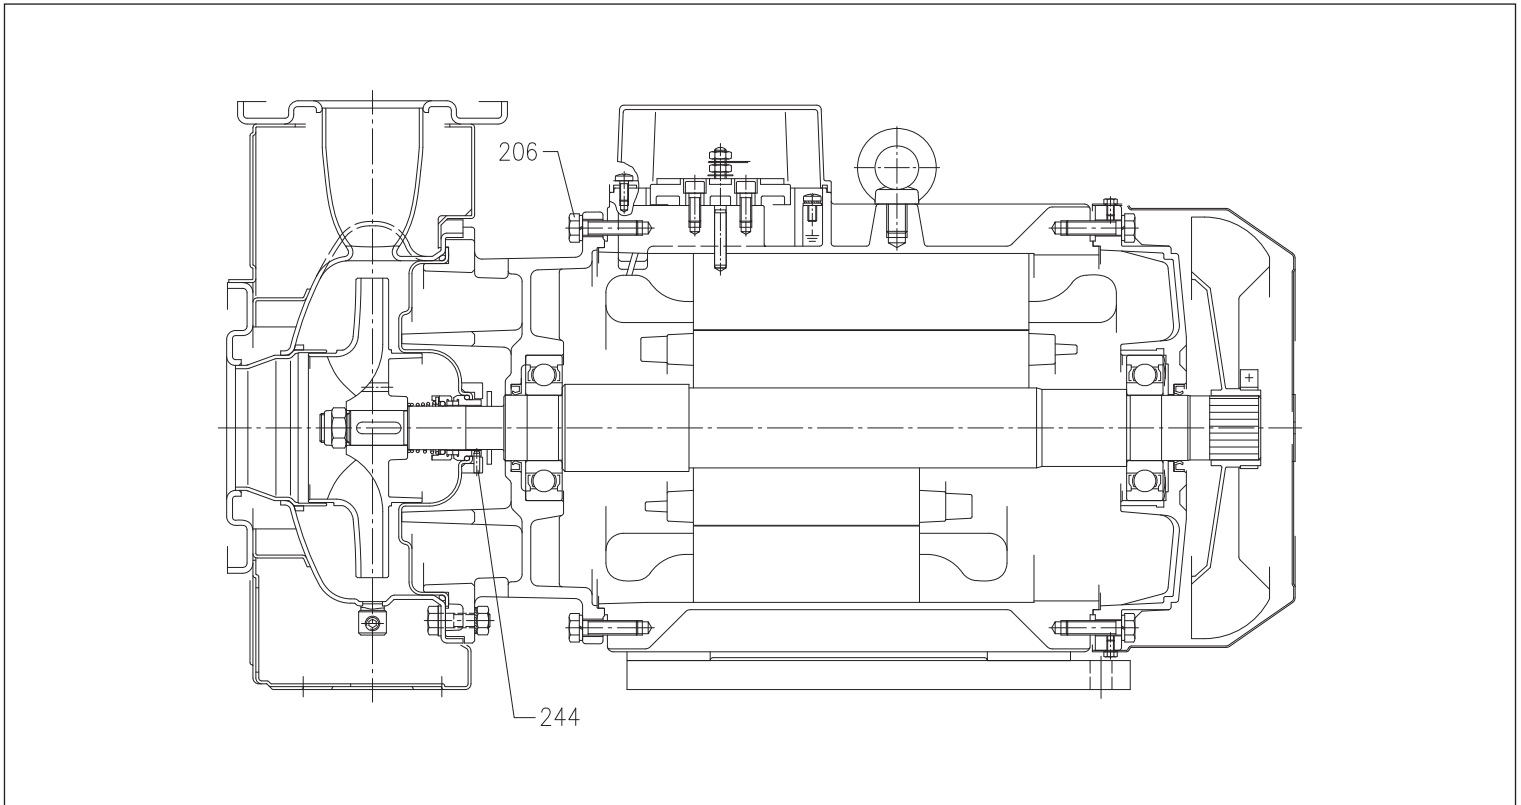

3 - 3L SERIES

**CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)**

MATERIALS TABLE

Ref.	Name	Material	
		3M	3LM
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Rotor shaft	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
012	Motor case	-	
013	Motor cover	Aluminium	
014	Fan	Polyamide	
015	Fan cover	Galvanised steel Fe P04	
016	Terminal box	-	
017	Terminal box cover	Aluminium (three phase version)	
018	Spray protector washer	NBR	-
019	Bearing (pump side)	-	
020	Bearing (motor side)	-	
021	Adjusting ring	Steel C70	
022	Tie-rod	Galvanised steel Fe 42	
	Screw	Galvanised Steel	
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Aluminium / Galvanised Steel	
056	Terminal box gasket	NBR	
058	Cable gland	-	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
092	Sealing ring	-	-
093	Sealing ring	-	-
101	Seeger ring	Carbon steel TC 80	
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	
206	Support screw [2]	Galvanised Steel	
244	Plug [3]	-	EN 1.4301 (AISI 304)

[1]= For 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15

[2]= For 15 kW and over


[3]= For 65-160/15 and 65-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)


3LM 80-160/11 - 80-160/13 SECTIONAL VIEW

2 Poles

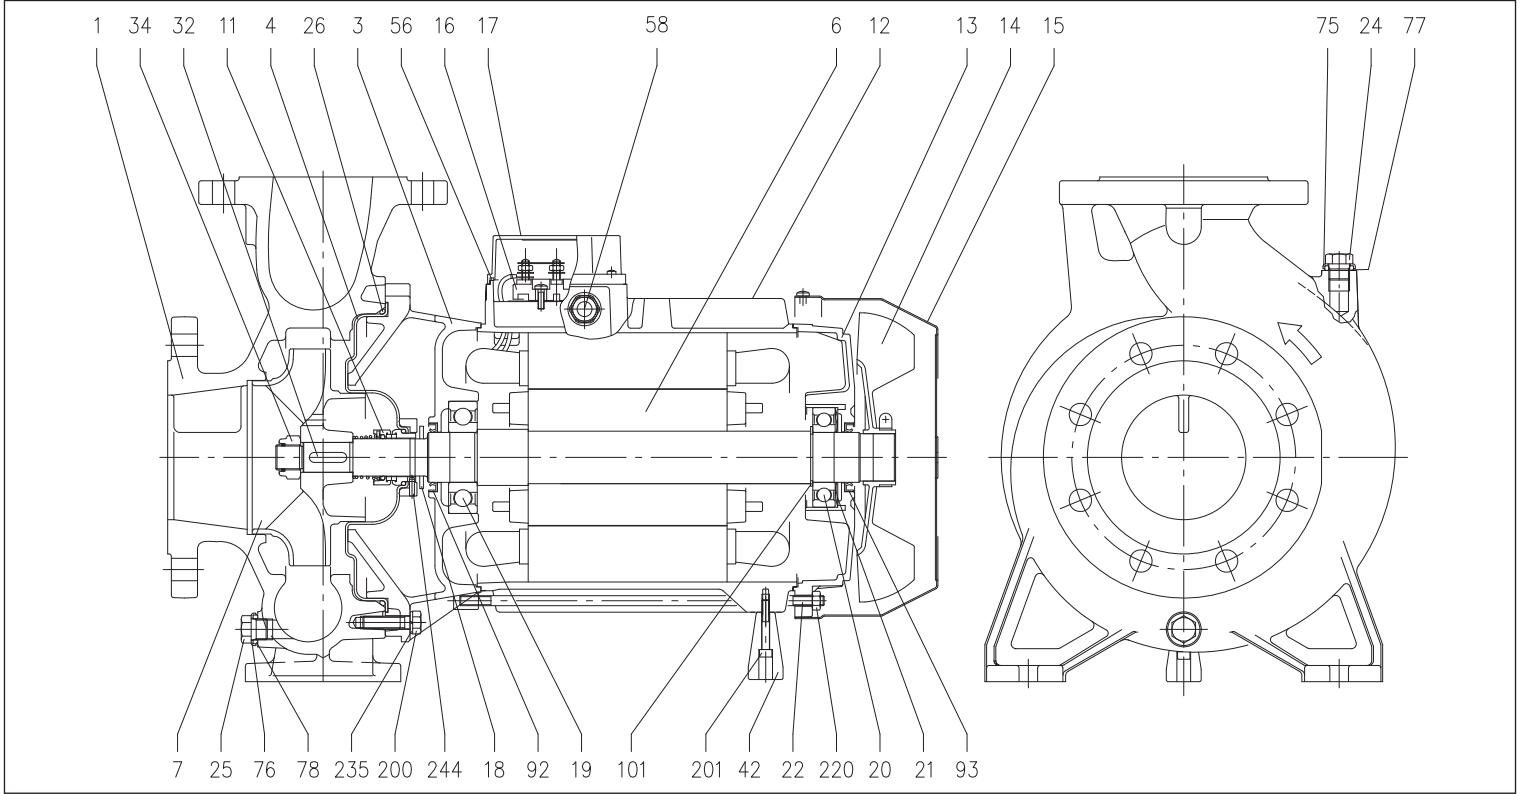

3LM 80-160/15 - 80-160/18.5 SECTIONAL VIEW

2 Poles

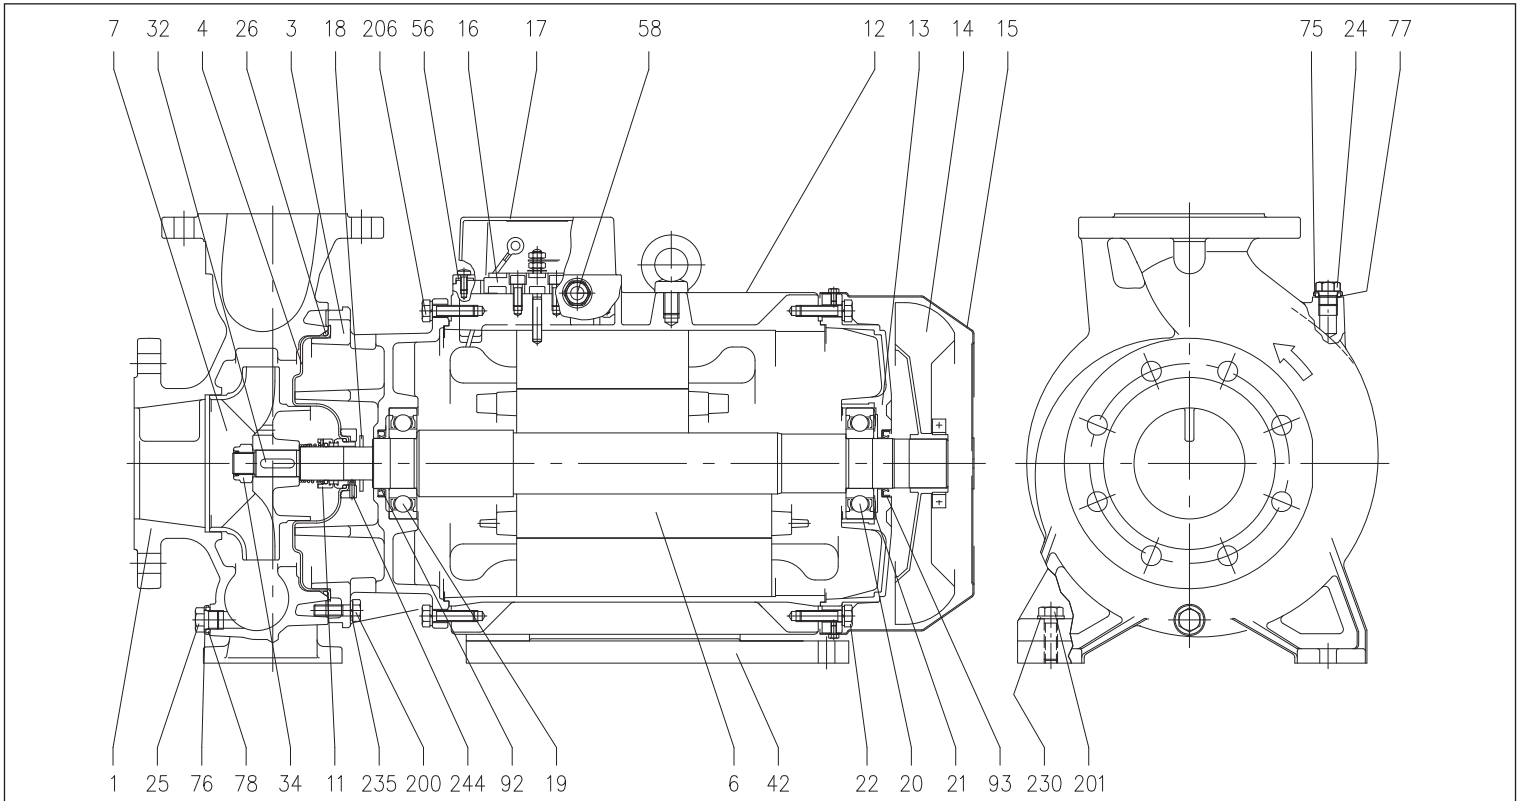

3 - 3L SERIES

**CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)**

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	032	Key	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	Aluminium
004	Seal housing disc	EN 1.4404 (AISI 316L)	042	Foot	Aluminium
006	Rotor shaft	EN 1.4404 (AISI 316L) - Part in contact with the liquid	056	Terminal box gasket	NBR
007	Impeller	EN 1.4401 (AISI 316)	058	Cable gland	-
011	Mechanical seal	SIC/SIC/FPM	075	Washer	EN 1.4404 (AISI 316L)
012	Motor case	-	076	Washer	EN 1.4404 (AISI 316L)
013	Motor cover	Aluminium	077	O-Ring	FPM
014	Fan	Polyamide	078	O-Ring	
015	Fan cover	Galvanised steel Fe P04	092	Sealing ring (11-13 kW, 15-18,5 kW)	-
016	Terminal box	-	093	Sealing ring (11-13 kW, 15-18,5 kW)	-
017	Terminal box cover	Aluminium	101	Seeger ring (for 11-13 kW only)	Carbon steel TC 80
018	Spray protector washer	NBR	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
019	Bearing (pump side)	-	201	Screw (11-13 kW, 15-18,5 kW)	Stainless steel A2-70 class ISO 3506/1
020	Bearing (motor side)	-	206	Motor support screw (for 15-18.5 kW only)	Galvanised Steel
021	Adjusting ring	Steel C70	220	Tie-rod nut (for 11-13 kW only)	Galvanised Steel
022	Tie-rod	Galvanised Steel	230	Washer (11-13 kW, 15-18,5 kW)	Galvanised Steel
024	Filler cap	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
025	Drain plug	EN 1.4404 (AISI 316L)	244	Plug [1]	EN 1.4301(AISI 304)
026	O-Ring	FPM			


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)


3(L)S 32, 40, 50 SECTIONAL VIEW

2 Poles

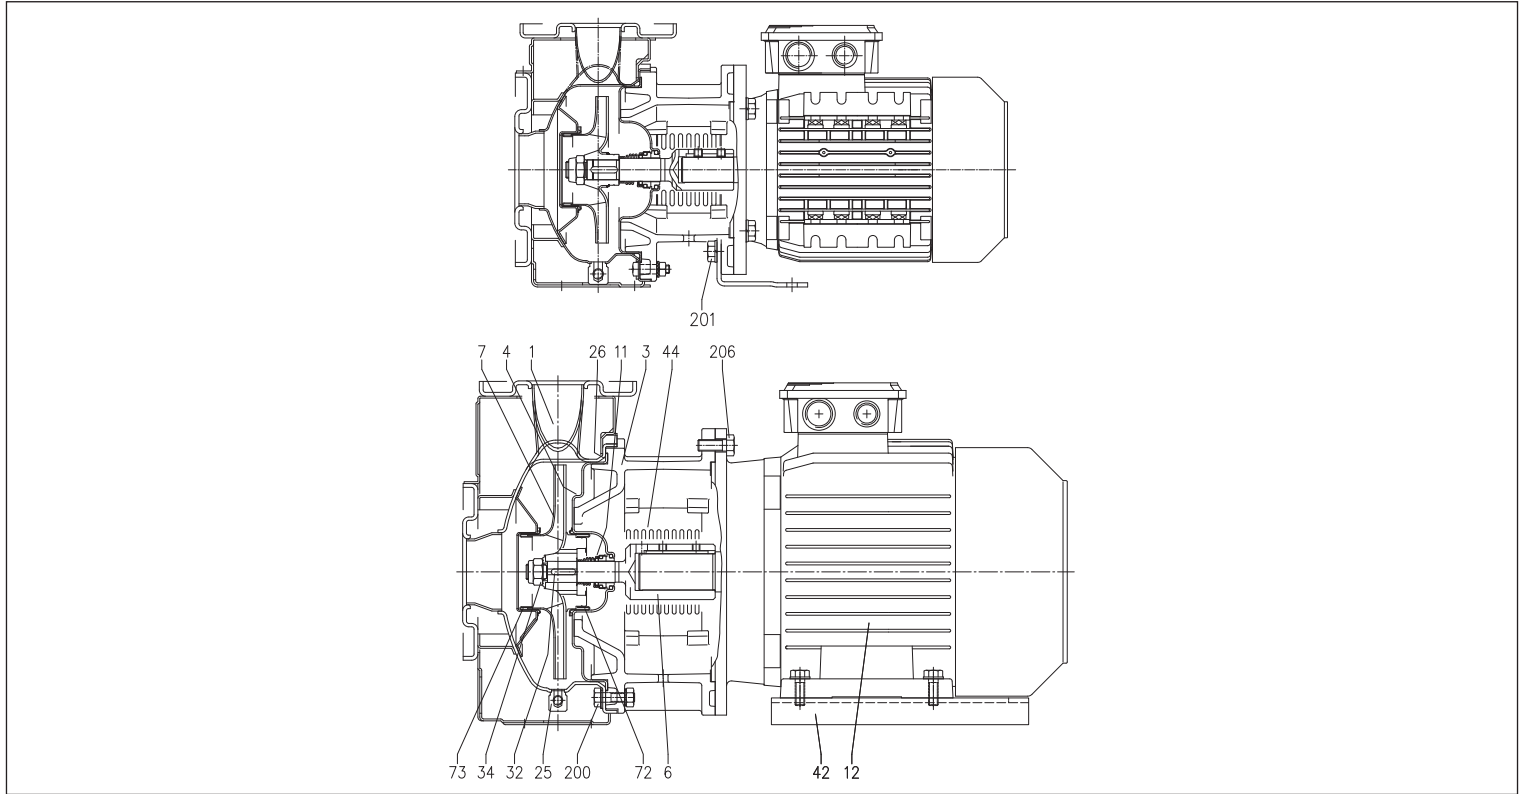

3(L)S 65 SECTIONAL VIEW

2 Poles

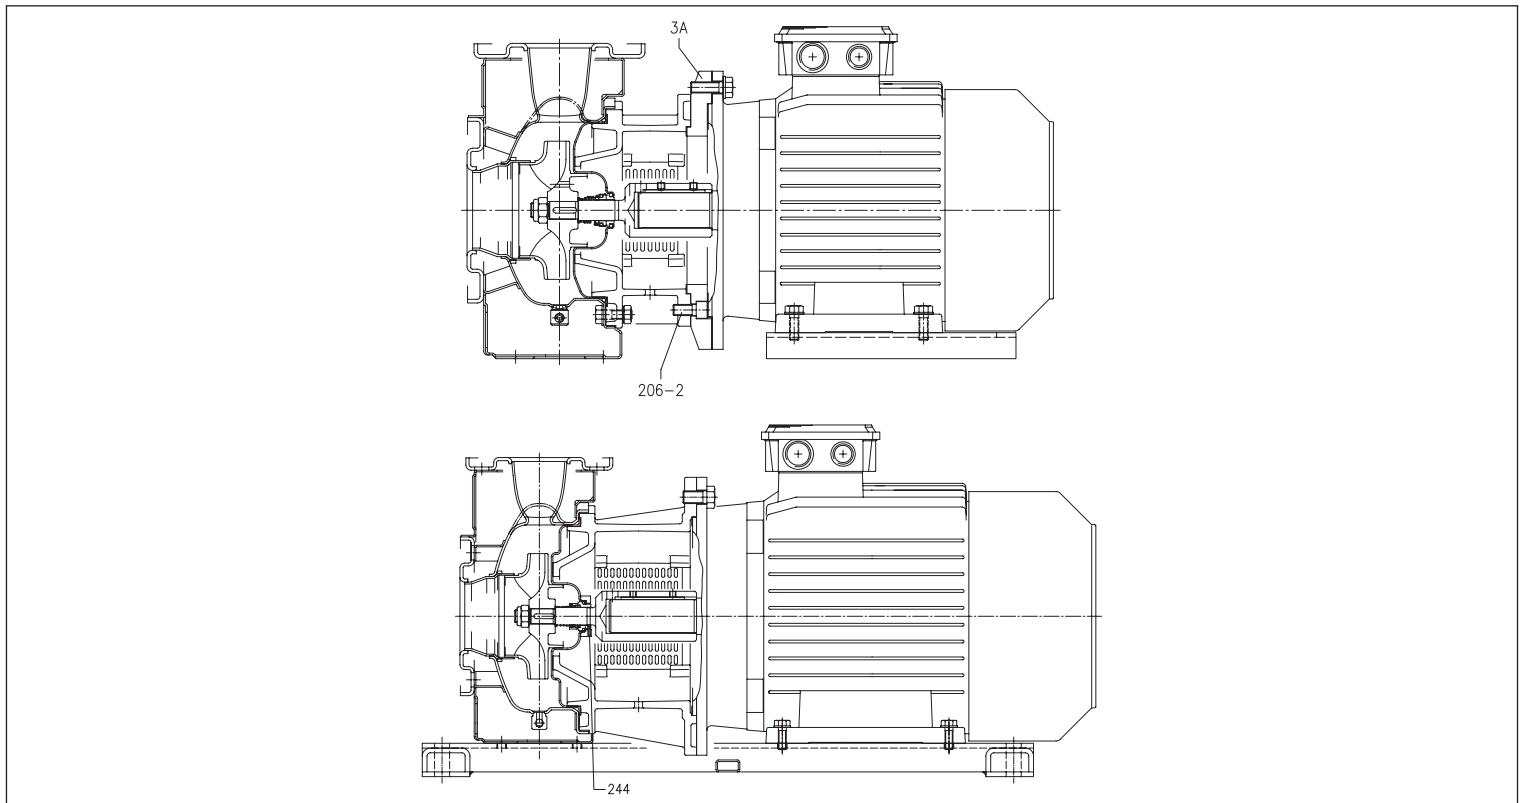

3 - 3L SERIES

**CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)**

MATERIALS TABLE

Ref.	Name	Material	
		3S	3LS
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
003A	Adapter ring [1]	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Joint - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
012	Motor	-	
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Aluminium / Galvanised Steel	
044	Support protection	EN 1.4301 (AISI 304)	
072	Wear ring [2]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring (not for 65)	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	
201	Screw	Galvanised Steel	
206	Support screw	Galvanised Steel	
206-2	Adapter ring screw	Galvanised Steel	
244	Plug [3]	-	EN 1.4301 (AISI 304)

[1]= For the 65-125/5.5 and 65-125/7.5 version only

[2]= For the 32-200, 40-200, 50-160, 50-200 version only


[3]= For the 65-160/15, 65-200 version only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS 80-160 SECTIONAL VIEW

2 Poles

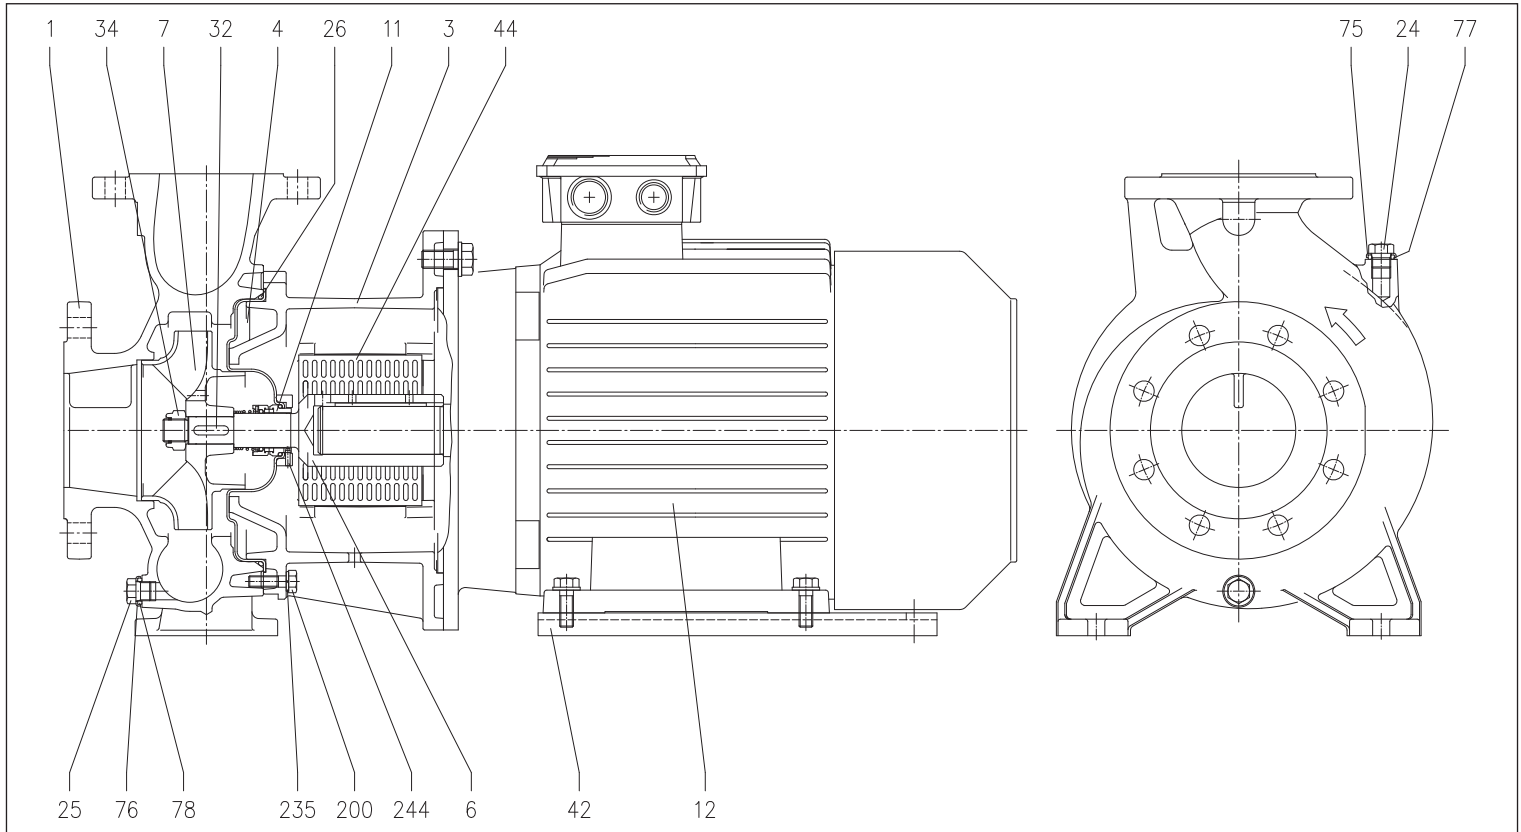

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	034	Impeller nut	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	042	Foot	Aluminium
004	Seal housing disc	EN 1.4404 (AISI 316L)	044	Support protection	EN 1.4301 (AISI 304)
006	Joint	EN 1.4404 (AISI 316L)	075	Washer	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4401 (AISI 316)	076	Washer	
011	Mechanical seal	SiC/SiC/FPM	077	O-Ring	FPM
012	Motor	-	078	O-Ring	
024	Filler cap	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
025	Drain plug	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
026	O-Ring	FPM	244	Plug [1]	EN 1.4301(AISI 304)
032	Key	EN 1.4401 (AISI 316)			


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS 65-250, 80 SECTIONAL VIEW

2 Poles

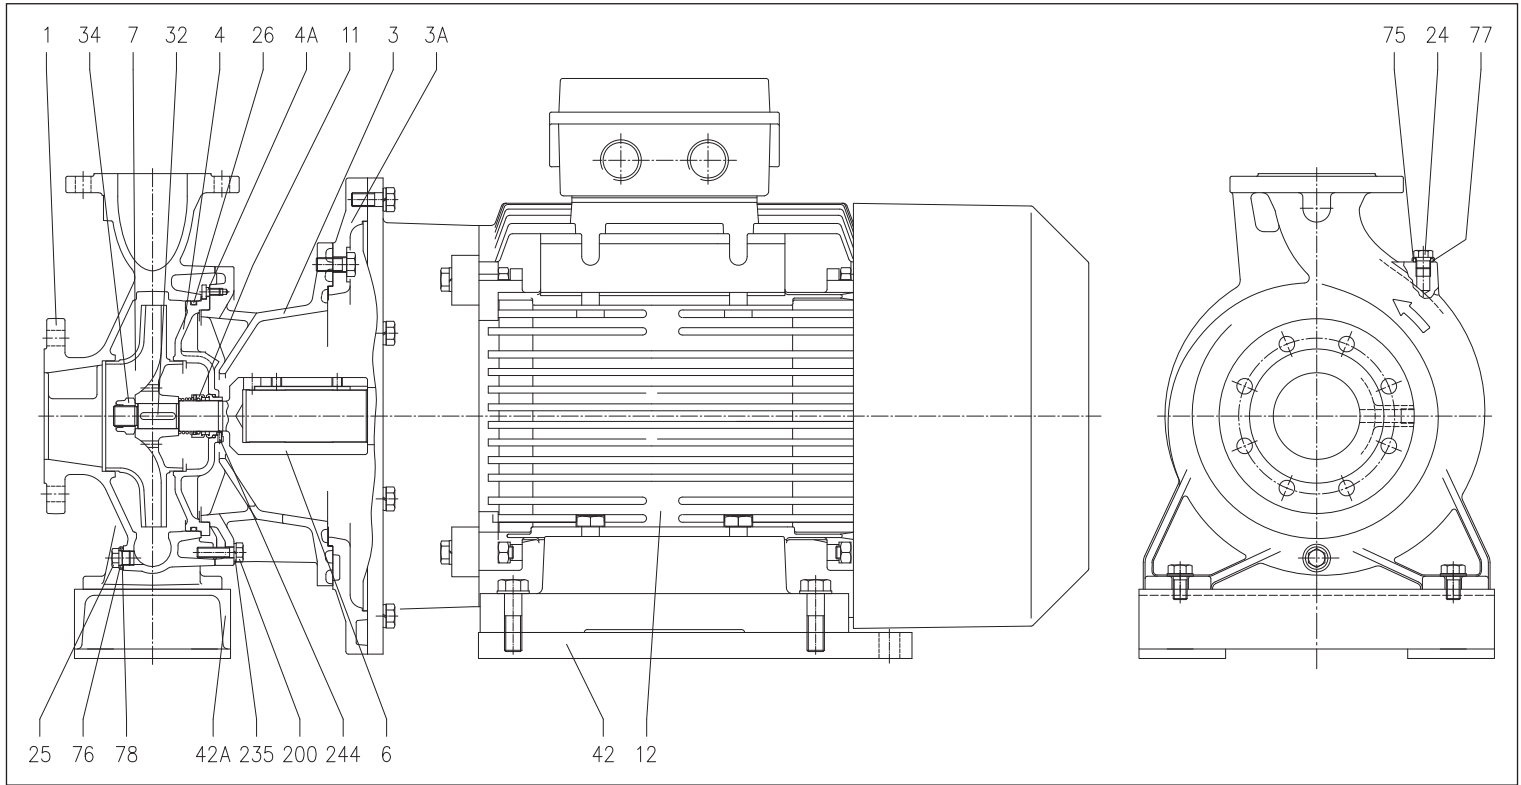

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)			
003	Motor support	Cast iron EN-GJL-200-EN 1561	032	Key	65-250 d=24 mm 80-200 d=24 mm EN 1.4401 (AISI 316)
003A	Adapter ring	Cast iron EN-GJL-200-EN 1561			
004	Seal housing disc	EN 1.4401 (AISI 316)			
004A	Seal housing disc screw	EN 1.4301(AISI 304)	034	Impeller nut	65-250 d=24 mm 80-200 d=24 mm 80-250 d=29 mm EN 1.4404 (AISI 316L)
006	Joint	65-250 d=24 mm			
		80-200 d=24 mm	042	Motor foot	Aluminium
		80-250 d=29 mm	042A	Pump foot	Aluminium/galvanised steel (for 80-250/55 only)
007	Impeller	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SiC/SiC/FPM	076	Washer	
012	Motor	-	077	O-Ring	FPM
024	Filler cap	EN 1.4404 (AISI 316L)	078	O-Ring	
025	Drain plug	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
026	O-Ring	FPM	235	Washer	EN 1.4301(AISI 304)
			244	Plug [1]	EN 1.4301(AISI 304)


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

SECTIONAL VIEW 3(L)P 32, 40, 50, 65

2 Poles

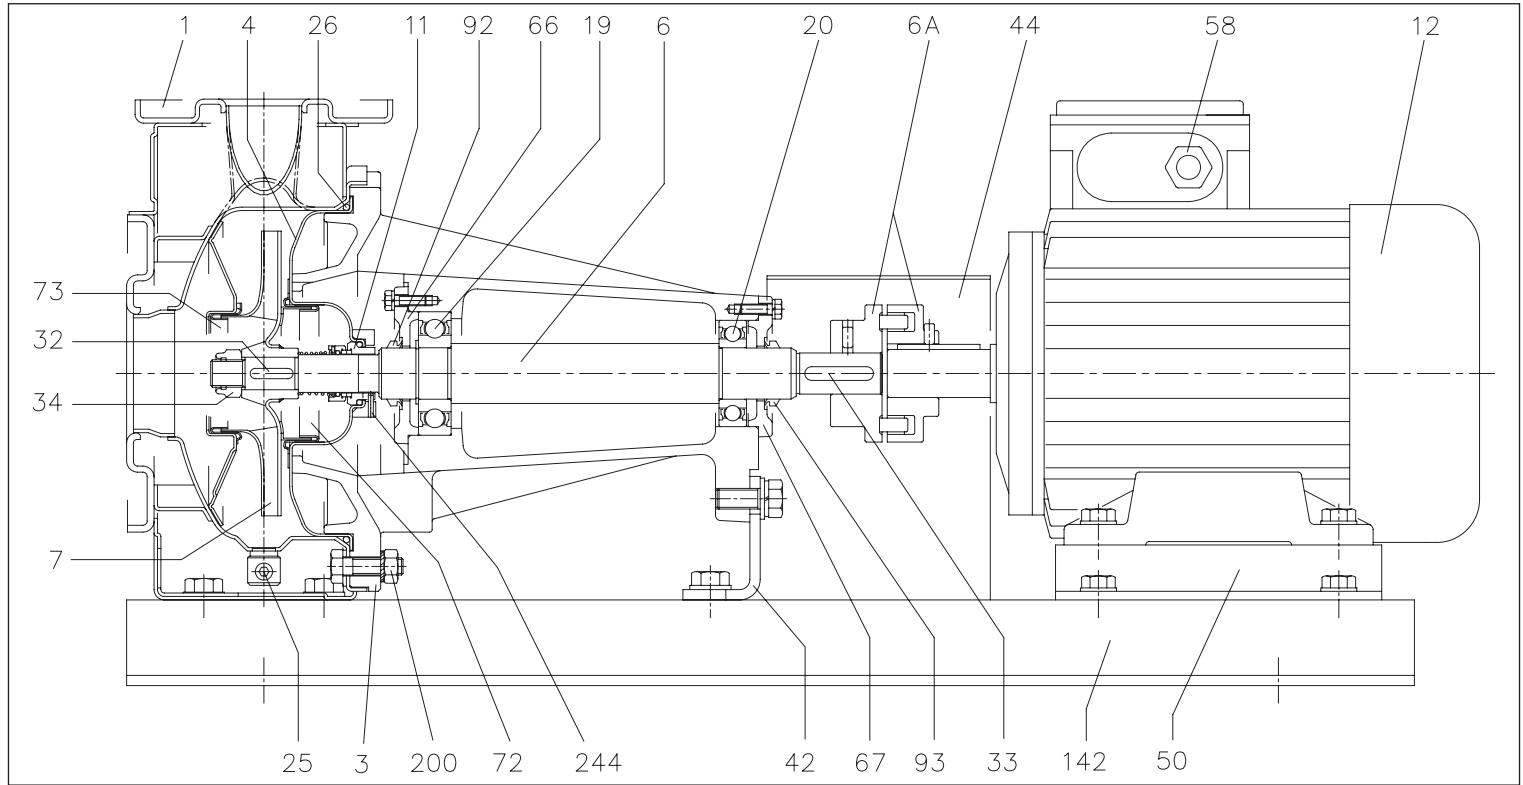

MATERIALS TABLE

Ref.	Name	Material	
		3P	3LP
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Shaft - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006A	Joint	Cast iron EN-GJL-250-EN 1561	
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	EN 1.4401 (AISI 316)	
012	Motor	Carbon/Ceramic/NBR	
019	Bearing (pump side)	SiC/SiC/FPM	
020	Bearing (motor side)	-	
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
033	Key	C 40	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Galvanised steel Fe 37	
044	Joint cover	Galvanised steel Fe 37	
050	Foot	Aluminium / Galvanised Steel	
058	Cable gland	-	
066	Support cover	Cast iron EN-GJL-250-EN 1561	
067	Support cover	Cast iron EN-GJL-250-EN 1561	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
092	Ring V	-	
093	Ring V	-	
142	Base	Galvanised steel Fe 37	
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	
244	Plug [2]	-	EN 1.4301 (AISI 304)



[1]= Only for 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15 versions
[2]= For 65-160/15 e 65-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3LP 80-160 SECTIONAL VIEW

2 Poles

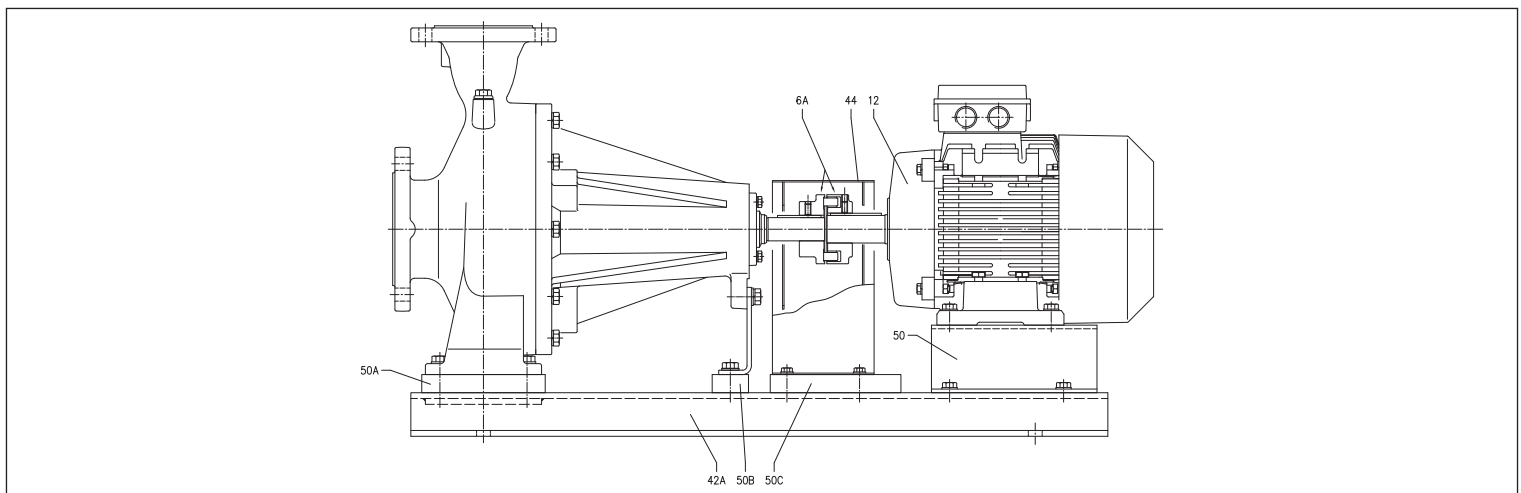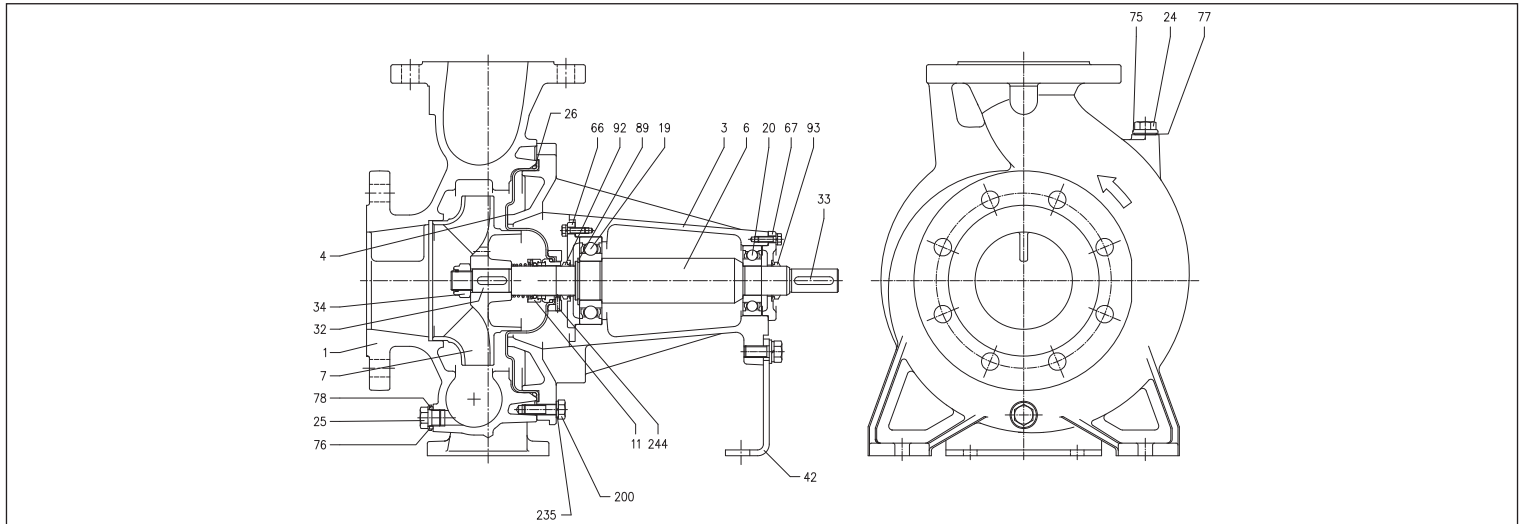

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	050	Rest	Aluminium
003	Motor support	Cast iron EN-GJL-200-EN 1561	050A	Pump spacer	-
004	Seal housing disc	EN 1.4404 (AISI 316L)	050B	Pump spacer	-
006	Shaft	EN 1.4404 (AISI 316L) Part in contact with the liquid	050C	Joint cover spacer	-
006A	Joint	Cast iron EN-GJL-250-EN 1561	066	Support cover	Cast iron EN-GJL-200-EN 1561
007	Impeller	EN 1.4401 (AISI 316)	067	Support cover	Cast iron EN-GJL-200-EN 1561
011	Mechanical seal	SiC/SiC/FPM	075	Washer	EN 1.4404 (AISI 316L)
012	Motor	-	076	Washer	
019	Bearing (pump side)	-	077	O-Ring	FPM
020	Bearing (motor side)	-	078	O-Ring	
024	Filler cap	EN 1.4404 (AISI 316L)	089	Seeger ring	Carbon steel TC 80
025	Drain plug	EN 1.4404 (AISI 316L)	092	Sealing ring	-
026	O-Ring	FPM	093	Sealing ring	
032	Key	EN 1.4401 (AISI 316)	200	Screw (pump body)	
033	Key	C 40	235	Washer	EN 1.4301(AISI 304)
034	Impeller nut	EN 1.4404 (AISI 316L)	244	Plug [1]	EN 1.4301(AISI 304)
042	Foot	Galvanised Steel			
042A	Base	Galvanised Steel			
044	Joint cover	Galvanised Steel			



[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3LP 65-250, 80 SECTIONAL VIEW

2 Poles

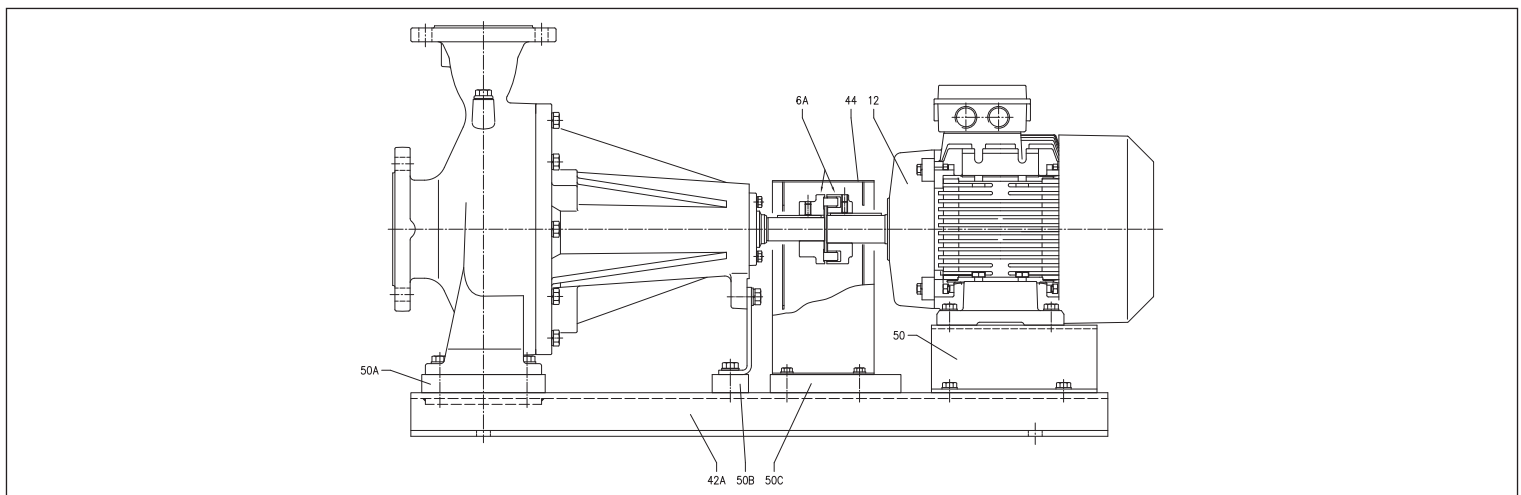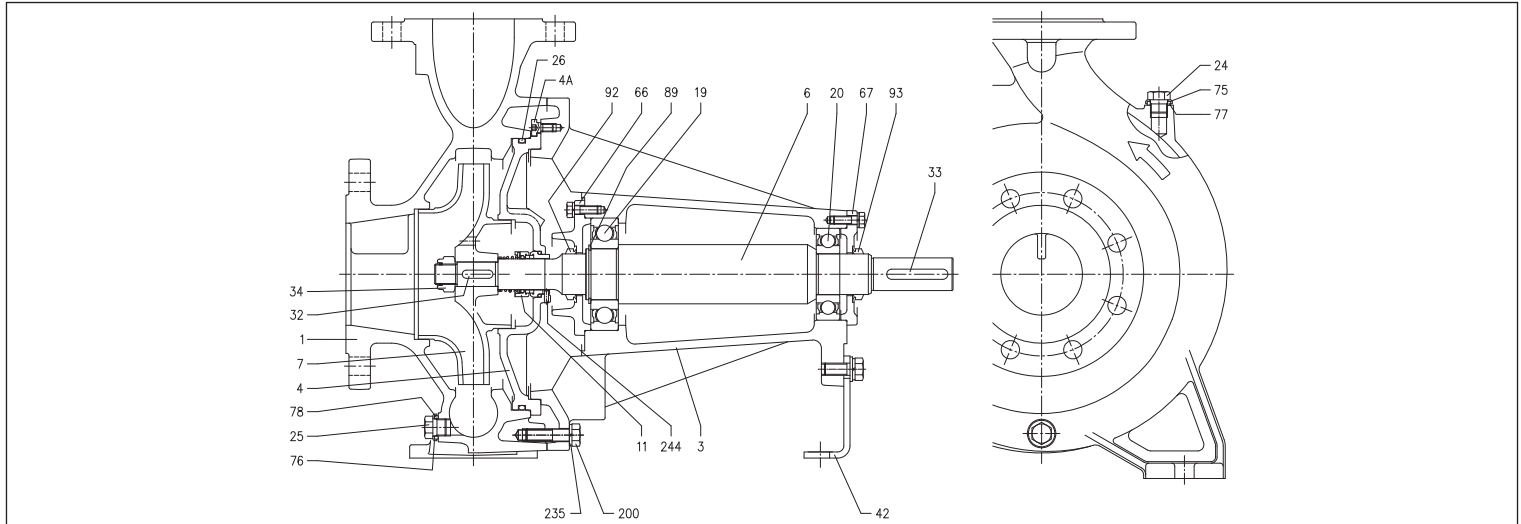

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material	
001	Pump body	EN 1.4401 (AISI 316)	042	Foot	Galvanised Steel	
003	Motor support	Cast iron EN-GJL-200-EN 1561	042A	Base	Galvanised Steel	
004	Seal housing disc	EN 1.4401 (AISI 316)	044	Joint cover	Galvanised Steel	
004A	Seal housing disc screw	EN 1.4301(AISI 304)	050	Foot (for 35-250/22 kW only)	Aluminium	
006	Shaft	EN 1.4462 (Duplex steel) for 30-37 kW	050A	Pump spacer	Aluminium	
006A	Joint	Cast iron EN-GJL-200-EN 1561	050B	Pump spacer	Aluminium	
007	Impeller	EN 1.4401 (AISI316)	050C	Joint cover spacer	Aluminium	
011	Mechanical seal	SiC/SiC/FPM	066	Support cover	Cast iron EN-GJL-200-EN 1561	
012	Motor	-	067	Support cover	Cast iron EN-GJL-200-EN 1561	
019	Bearing (pump side)	-	075	Washer	EN 1.4404 (AISI 316L)	
020	Bearing (motor side)	-	076	Washer		
024	Filler cap	EN 1.4404 (AISI 316L)	077	O-Ring	FPM	
025	Drain plug	EN 1.4404 (AISI 316L)	078	O-Ring		
026	O-Ring	FPM	089	Seeger ring	Carbon steel TC 80	
032	Key	EN 1.4401 (AISI 316)	65-250 d=24 mm	092	Sealing ring	-
			80-200 d=24 mm	093	Sealing ring	-
			80-250 d=29 mm	200	Screw (pump body)	Stainless steel A270 class ISO 3506/1
033	Key	C 40	235	Washer	EN 1.4301 (AISI 304)	
			244	Plug [1]	EN 1.4301 (AISI 304)	
034	Impeller nut	EN 1.4404 (AISI 316L)				


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(.)SF 32, 40, 50, 65 SECTIONAL VIEW

2 Poles

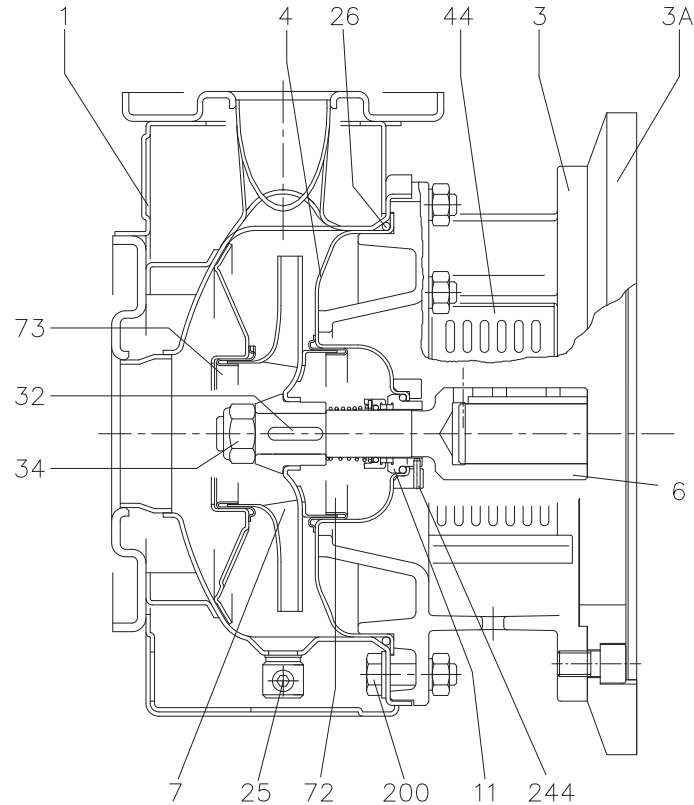

MATERIALS TABLE

Ref.	Name	Material	
		3SF	3LSF
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
003A	Adapter ring [1]	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Joint - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	32, 40, 50		
	65-125/160/200		EN 1.4401 (AISI 316)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
044	Support protection	EN 1.4301 (AISI 304)	
072	Wear ring [2]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	not for the 65		
	32-125, 40-125		
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	
	40-160, 40-200, 50-125, 50-160, 50-200, 65-125, 65-160, 65-200		
244	Plug [3]	-	EN 1.4301 (AISI 304)

[1]= For 65-125/5.5 and 65-125/7.5 only

[2]= For the 32-200, 40-200, 50-160, 50-200 versions


[3]= For 65-160/15 and 65-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LSF 80-160 SECTIONAL VIEW

2 Poles

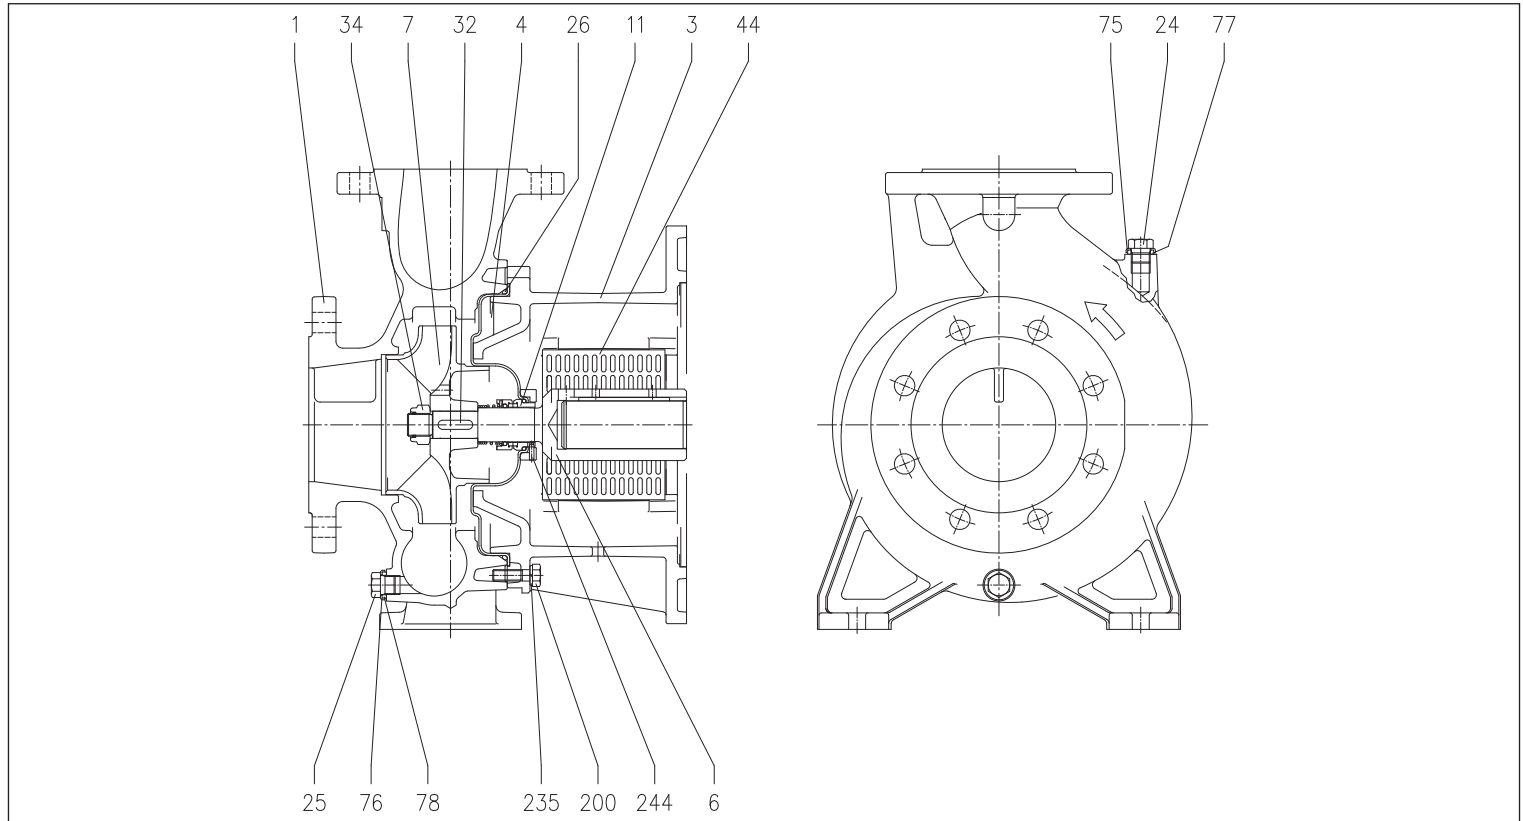

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	034	Impeller nut	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	044	Support protection	EN 1.4301 (AISI 304)
004	Seal housing disc	EN 1.4404 (AISI 316L)	075	Washer	EN 1.4404 (AISI 316L)
006	Joint	EN 1.4404 (AISI 316L)	076	Washer	
007	Impeller	EN 1.4401 (AISI 316)	077	O-Ring	FPM
011	Mechanical seal	SiC/SiC/FPM	078	O-Ring	
024	Filler cap	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
025	Drain plug	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
026	O-Ring	FPM	244	Plug [1]	EN 1.4301(AISI 304)
032	Key	EN 1.4401 (AISI 316)			


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LSF 65-250, 80 SECTIONAL VIEW

2 Poles

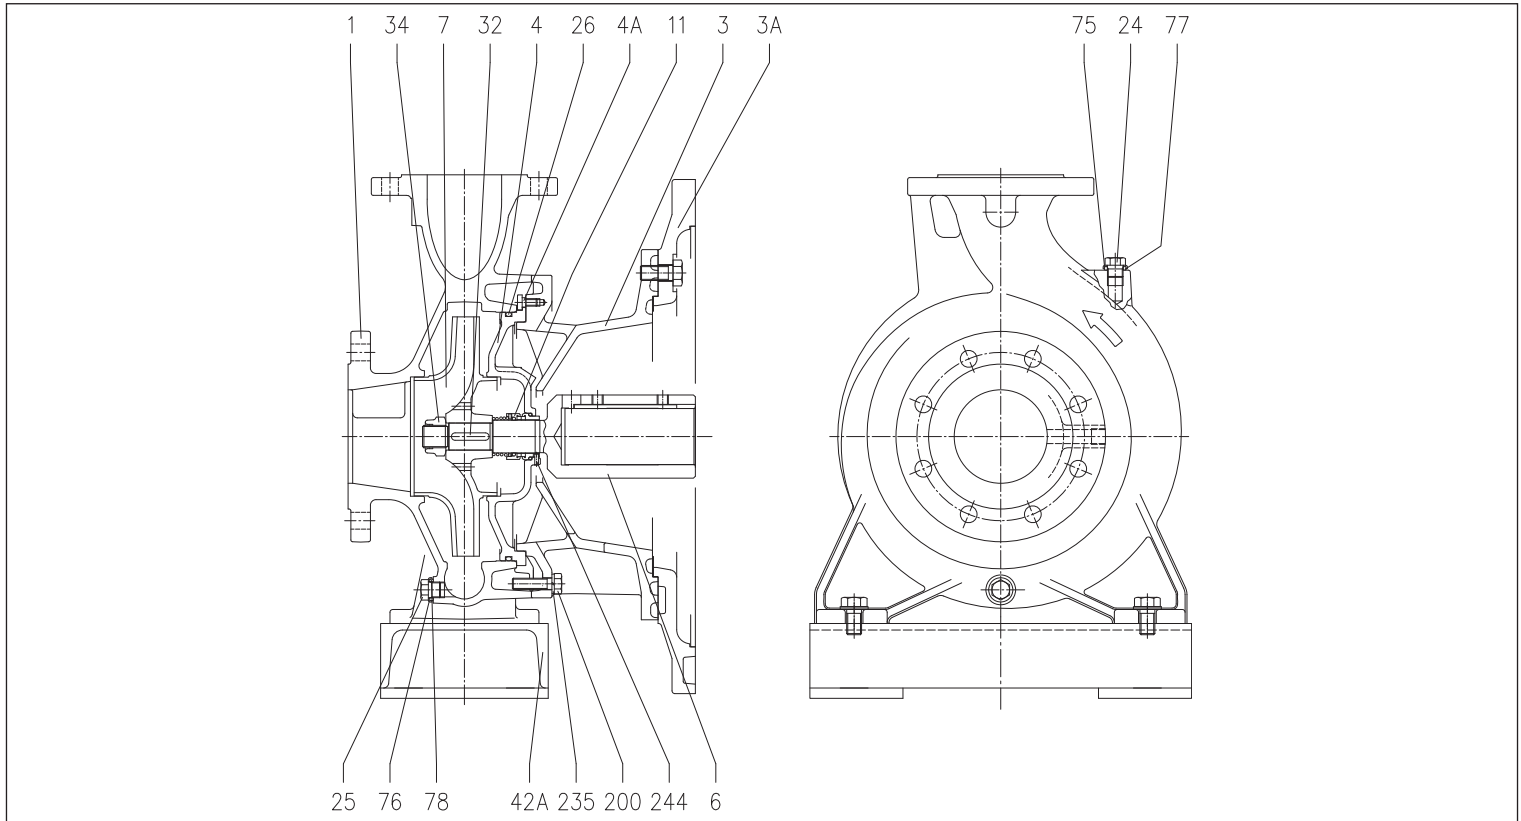

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	026	O-Ring	FPM
003	Motor support	Cast iron EN-GJL-200-EN 1561	032	Key	65-250 d=24 mm
003A	Adapter ring	Cast iron EN-GJL-200-EN 1561			80-200 d=24 mm
004	Seal housing disc	EN 1.4401 (AISI 316)			80-250 d=29 mm
004A	Seal housing disc screw	EN 1.4301(AISI 304)	034	Impeller nut	65-250 d=24 mm
006	Joint	EN 1.4404 (AISI 316L) per 22 kW			80-200 d=24 mm
		EN 1.4462 (duplex steel) for 30-37 kW			80-250 d=29 mm
		EN 1.4404 (AISI 316L) per 22 kW			Aluminium/galvanised steel (for 80-250/55 only)
007	Impeller	EN 1.4462 (duplex steel)	042A	Pump spacer	EN 1.4404 (AISI 316L)
		EN 1.4401 (AISI 316)	075	Washer	
011	Mechanical seal	SiC/SiC/FPM	076	Washer	FPM
			077	O-Ring	
			078	O-Ring	
			200	Screw (pump body)	
024	Filler cap	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
025	Drain plug	EN 1.4404 (AISI 316L)	244	Plug [1]	EN 1.4301(AISI 304)


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(LP) 32, 40, 50, 65 SECTIONAL VIEW

2 Poles

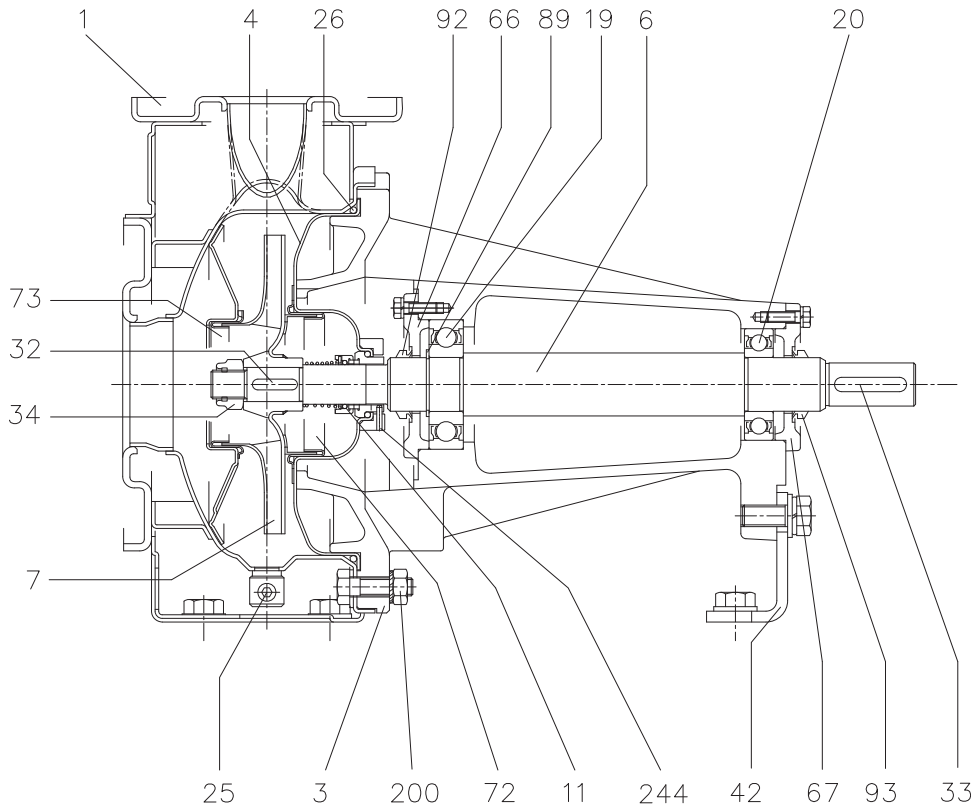

MATERIALS TABLE

Ref.	Name	Material	
		3P	3LP
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Shaft - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	32, 40, 50		
	65-125/160/200		
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
019	Bearing (pump side)	-	-
020	Bearing (motor side)	-	-
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)
033	Key	C 40	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Galvanised steel Fe 37	
066	Support cover	Cast iron EN-GJL-250-EN 1561	
067	Support cover	Cast iron EN-GJL-250-EN 1561	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	not for the 65		
089	Seeger ring	Carbon steel TC 80	
092	Sealing ring	-	-
093	Sealing ring	-	-
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	
244	Plug [2]	-	EN 1.4301 (AISI 304)

[1]= Only for 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15 versions


[2]= For 65-160/15 e 65-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3LP 80-160 SECTIONAL VIEW

2 Poles

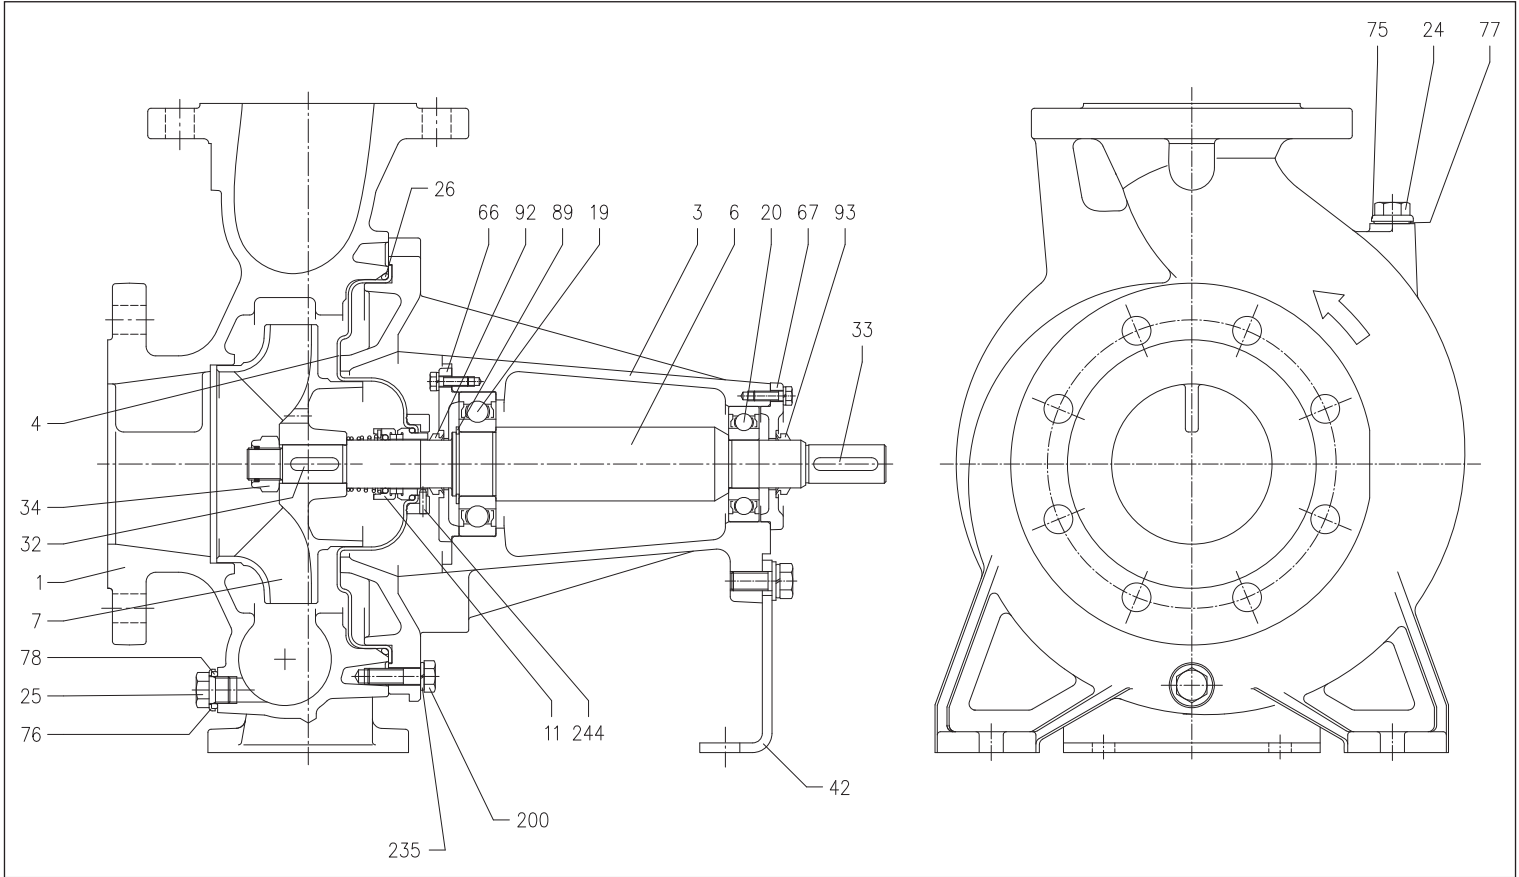

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material	
001	Pump body	EN 1.4401 (AISI 316)	034	Impeller nut	EN 1.4404 (AISI 316L)	
003	Motor support	Cast iron EN-GJL-200-EN 1561	042	Foot	Galvanised Steel	
004	Seal housing disc	EN 1.4404 (AISI 316L)	066	Support cover	Cast iron EN-GJL-200-EN 1561	
006	Shaft	EN 1.4404 (AISI316L) Part in contact with the liquid	067	Support cover	Cast iron EN-GJL-200-EN 1561	
007	Impeller	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)	
011	Mechanical seal	SiC/SiC/FPM	076	Washer		
			077	O-Ring		FPM
			078	O-Ring		
019	Bearing (pump side)	-	089	Seeger ring	Carbon steel TC 80	
020	Bearing (motor side)	-	092	Sealing ring		
024	Filler cap	EN 1.4404 (AISI 316L)	093	Sealing ring		
025	Drain plug	EN 1.4404 (AISI 316L)	200	Body screw	Stainless steel A270 class ISO 3506/1	
026	O-Ring	FPM	235	Washer	EN 1.4301(AISI 304)	
032	Key	EN 1.4401 (AISI 316)	244	Plug [1]	EN 1.4301(AISI 304)	
033	Key	C 40				


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LPF 65-250, 80 SECTIONAL VIEW

2 Poles

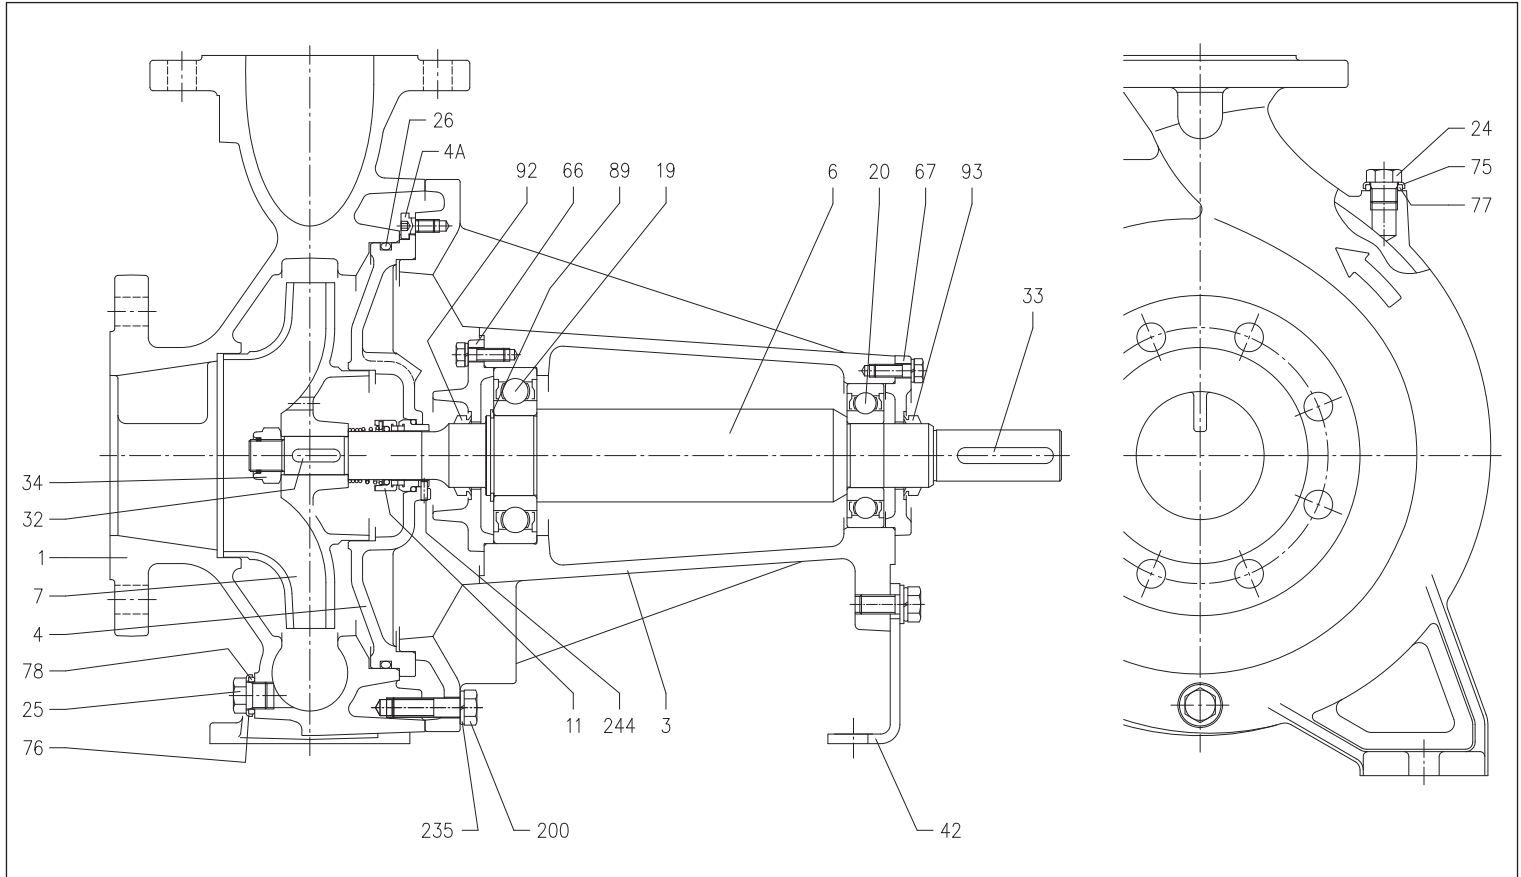

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	033	Key	C 40
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	65-250 d=24 mm
004	Seal housing disc	EN 1.4401 (AISI 316)			80-200 d=24 mm
004A	Seal housing disc screw	EN 1.4301 (AISI 304)			80-250 d=29 mm
006	Shaft	EN 1.4462 (duplex steel) per 30-37 kW	042	Foot	Galvanised Steel
007	Impeller	EN 1.4401 (AISI316)	066	Support cover	Cast iron EN-GJL-200-EN 1561
011	Mechanical seal	SiC/SiC/FPM	067	Support cover	Cast iron EN-GJL-200-EN 1561
			075	Washer	EN 1.4404 (AISI 316L)
			076	Washer	
			077	O-Ring	FPM
078	O-Ring				
019	Bearing (pump side)	-	089	Seeger ring	Carbon steel TC 80
020	Bearing (motor side)	-	092	Sealing ring	-
024	Filler cap	EN 1.4404 (AISI 316L)	093	Sealing ring	-
025	Drain plug	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A270 class ISO 3506/1
026	O-Ring	FPM	235	Washer	EN 1.4301 (AISI 304)
032	Key	EN 1.4401 (AISI 316)	244	Plug [1]	EN 1.4301 (AISI 304)

[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

MECHANICAL SEAL standard version

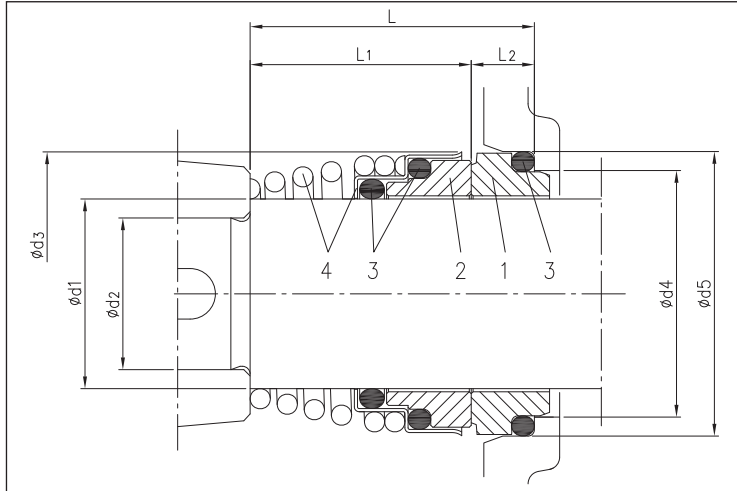

MATERIALS TABLE

Ref.	Name	Material	
		Standard	H
1	Fixed part	Carbon	Carbon
2	Rotating part	Ceramic	Ceramic
3	Gasket	NBR	FPM
4	Frame + spring	EN 1.4401 (AISI 316)	EN 1.4401 (AISI 316)

SPECIAL MECHANICAL SEALS (on request)

Name	Material				
	H version	HS version	HW version	HSW version	E version
Fixed Part	Carbon	SiC	Tungsten Carbide	Tungsten Carbide	Carbon
Rotating Part	Ceramic	SiC	Tungsten Carbide	SiC	SiC
Elastomers	FPM	FPM	FPM	FPM	EPDM
Spring	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
Structure/Frame	AISI 304	AISI 316	AISI 304	AISI 304	AISI 316

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

ELECTRIC DATA TABLE

Model	P ₂		Mec Motor	Capacitor		P ₁ [kW]	Absorbed Current [A]		
	[HP]	[kW]		µF	V _c		230V	400V	690V
3(.)M 32-125/1.1 M	1,5	1,1	90	31,5	450	1,51	6,7	-	-
3(.)M 32-125/1.1	2	1,5	90	-	-	2	5,9	3,4	-
3(.)M 32-160/1.5 M	2	1,5	90	40	450	2,1	9,6	-	-
3(.)M 32-160/1.5	2	1,5	90	-	-	2	5,9	3,4	-
3(.)M 32-160/2.2 M	3	2,2	90	50	450	2,95	13,3	-	-
3(.)M 32-160/2.2	3	2,2	90	-	-	2,8	8,3	4,8	-
3(.)M 32-200/3.0	4	3	90	-	-	3,75	11,3	6,5	-
3(.)M 32-200/4.0	5,5	4	100	-	-	5,1	15,9	9,2	-
3(.)M 32-200/5.5	7,5	5,5	112	-	-	6,7	-	11,8	6,8
3(.)M 32-200/7.5	10	7,5	112	-	-	9,1	-	15,7	9,1
3(.)M 40-125/1,5 M	2	1,5	90	40	450	2,1	9,6	-	-
3(.)M 40-125/1.5	2	1,5	90	-	-	2	5,9	3,4	-
3(.)M 40-125/2.2 M	3	2,2	90	50	450	2,95	13,3	-	-
3(.)M 40-125/2.2	3	2,2	90	-	-	2,8	8,3	4,8	-
3(.)M 40-160/3.0	4	3	90	-	-	3,75	11,3	6,5	-
3(.)M 40-160/4.0	5,5	4	100	-	-	5,1	15,9	9,2	-
3(.)M 40-200/5.5	7,5	5,5	112	-	-	6,7	-	11,8	6,8
3(.)M 40-200/7.5	10	7,5	112	-	-	9,1	-	15,7	9,1
3(.)M 40-200/11	15	11	132	-	-	13,1	-	22	12,7
3(.)M 50-125/2.2 M	3	2,2	90	50	450	2,95	13,3	-	-
3(.)M 50-125/2.2	3	2,2	90	-	-	2,8	8,3	4,8	-
3(.)M 50-125/3.0	4	3	90	-	-	3,75	11,3	6,5	-
3(.)M 50-125/4.0	5,5	4	100	-	-	5,1	15,9	9,2	-
3(.)M 50-160/5.5	7,5	5,5	112	-	-	6,7	-	11,8	6,8
3(.)M 50-160/7.5	10	7,5	112	-	-	9,1	-	15,7	9,1
3(.)M 50-200/9.2	12,5	9,2	132	-	-	11	-	18,8	10,8
3(.)M 50-200/11	15	11	132	-	-	13,1	-	22	12,7
3(.)M 50-200/15	20	15	160	-	-	17,5	-	30	17,3
3(.)M 65-125/4	5,5	4	100	-	-	5,1	15,9	9,2	-
3(.)M 65-125/5.5	7,5	5,5	112	-	-	6,7	-	11,8	6,8
3(.)M 65-125/7.5	10	7,5	112	-	-	9,1	-	15,7	9,1
3(.)M 65-160/7.5	10	7,5	112	-	-	9,1	-	15,7	9,1
3(.)M 65-160/9.2	12,5	9,2	132	-	-	11	-	18,8	10,8
3(.)M 65-160/11	15	11	132	-	-	13,1	-	22	12,7
3(.)M 65-160/15	20	15	160	-	-	17,5	-	30	17,3
3(.)M 65-200/15	20	15	160	-	-	17,5	-	30	17,3
3(.)M 65-200/18.5	25	18,5	160	-	-	21,3	-	39	22,5
3(.)M 65-200/22	30	22	160	-	-	25	-	42,3	24,4
3LM 80-160/11	15	11	132	-	-	13,1	-	22	12,7
3LM 80-160/13	17,5	13	132	-	-	15	-	25	14,4
3LM 80-160/15	20	15	160	-	-	17,5	-	30	17,3
3LM 80-160/18.5	25	18,5	160	-	-	21,3	-	39	22,5

2 Poles


Model	P ₂		Mec Motor	P ₁ [kW]	Absorbed Current [A]		
	[HP]	[kW]			230V	400V	690V
3(.)S 32-125/1.1	1,5	1,1	80	1,42	4,3	2,5	-
3(.)S 32-160/1.5	2	1,5	90	1,91	5,9	3,4	-
3(.)S 32-160/2.2	3	2,2	90	2,69	8,5	4,9	-
3(.)S 32-200/3.0	4	3	100	3,63	11,1	6,4	-
3(.)S 32-200/4.0	5,5	4	112	4,71	14,4	8,3	-
3(.)S 32-200/5.5	7,5	5,5	132	6,35	-	10,5	6,1
3(.)S 32-200/7.5	10	7,5	132	8,36	-	14,6	8,4
3(.)S 40-125/1.5	2	1,5	90	1,91	5,9	3,4	-
3(.)S 40-125/2.2	3	2,2	90	2,69	8,5	4,9	-
3(.)S 40-160/3.0	4	3	100	3,63	11,1	6,4	-
3(.)S 40-160/4.0	5,5	4	112	4,71	14,4	8,3	-
3(.)S 40-200/5.5	7,5	5,5	132	6,35	-	10,5	6,1
3(.)S 40-200/7.5	10	7,5	132	8,36	-	14,6	8,4
3(.)S 40-200/11	15	11	160	12,46	-	21,7	12,5
3(.)S 50-125/2.2	3	2,2	90	2,69	8,5	4,9	-
3(.)S 50-125/3.0	4	3	100	3,63	11,1	6,4	-
3(.)S 50-125/4.0	5,5	4	112	4,71	14,4	8,3	-
3(.)S 50-160/5.5	7,5	5,5	132	6,35	-	10,5	6,1
3(.)S 50-160/7.5	10	7,5	132	8,36	-	14,6	8,4
3(.)S 50-200/9.2	12,5	9,2	132	10,55	-	17,3	10
3(.)S 50-200/11	15	11	160	12,46	-	21,7	12,5
3(.)S 50-200/15	20	15	160	16,78	-	28,5	16,4
3(.)S 65-125/4	5,5	4	112	4,71	14,4	8,3	-
3(.)S 65-125/5.5	7,5	5,5	132	6,35	-	10,5	6,1
3(.)S 65-125/7.5	10	7,5	132	8,36	-	14,6	8,4
3(.)S 65-160/7.5	10	7,5	132	8,36	-	14,6	8,4
3(.)S 65-160/9.2	12,5	9,2	132	10,55	-	17,3	10
3(.)S 65-160/11	15	11	160	12,46	-	21,7	12,5
3(.)S 65-160/15	20	15	160	16,78	-	28,5	16,4
3(.)S 65-200/15	20	15	160	16,78	-	28,5	16,4
3(.)S 65-200/18.5	25	18,5	160	20,56	-	34,1	19,7
3(.)S 65-200/22	30	22	180	24,5	-	42,5	24,5
3LS 65-250/30	40	30	200	32,88	-	54,6	31,5
3LS 65-250/37	50	37	200	40,45	-	66,7	38,5
3LS 80-160/11	15	11	160	12,46	-	21,7	12,5
3LS 80-160/15R	20	15	160	16,78	-	28,5	16,4
3LS 80-160/15	20	15	160	16,78	-	28,5	16,4
3LS 80-160/18.5	25	18,5	160	20,56	-	34,1	19,7
3LS 80-200/22	30	22	180	24,5	-	42,5	24,5
3LS 80-200/30	40	30	200	32,88	-	54,6	31,5
3LS 80-200/37	50	37	200	40,45	-	66,7	37,1
3LS 80-250/37	50	37	200	40,45	-	66,7	37,1
3LS 80-250/45	60	45	225	48,86	-	79,8	46,1
3LS 80-250/55	75	55	250	59,3	-	99,4	57,4

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3 SERIES PERFORMANCE RANGE at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

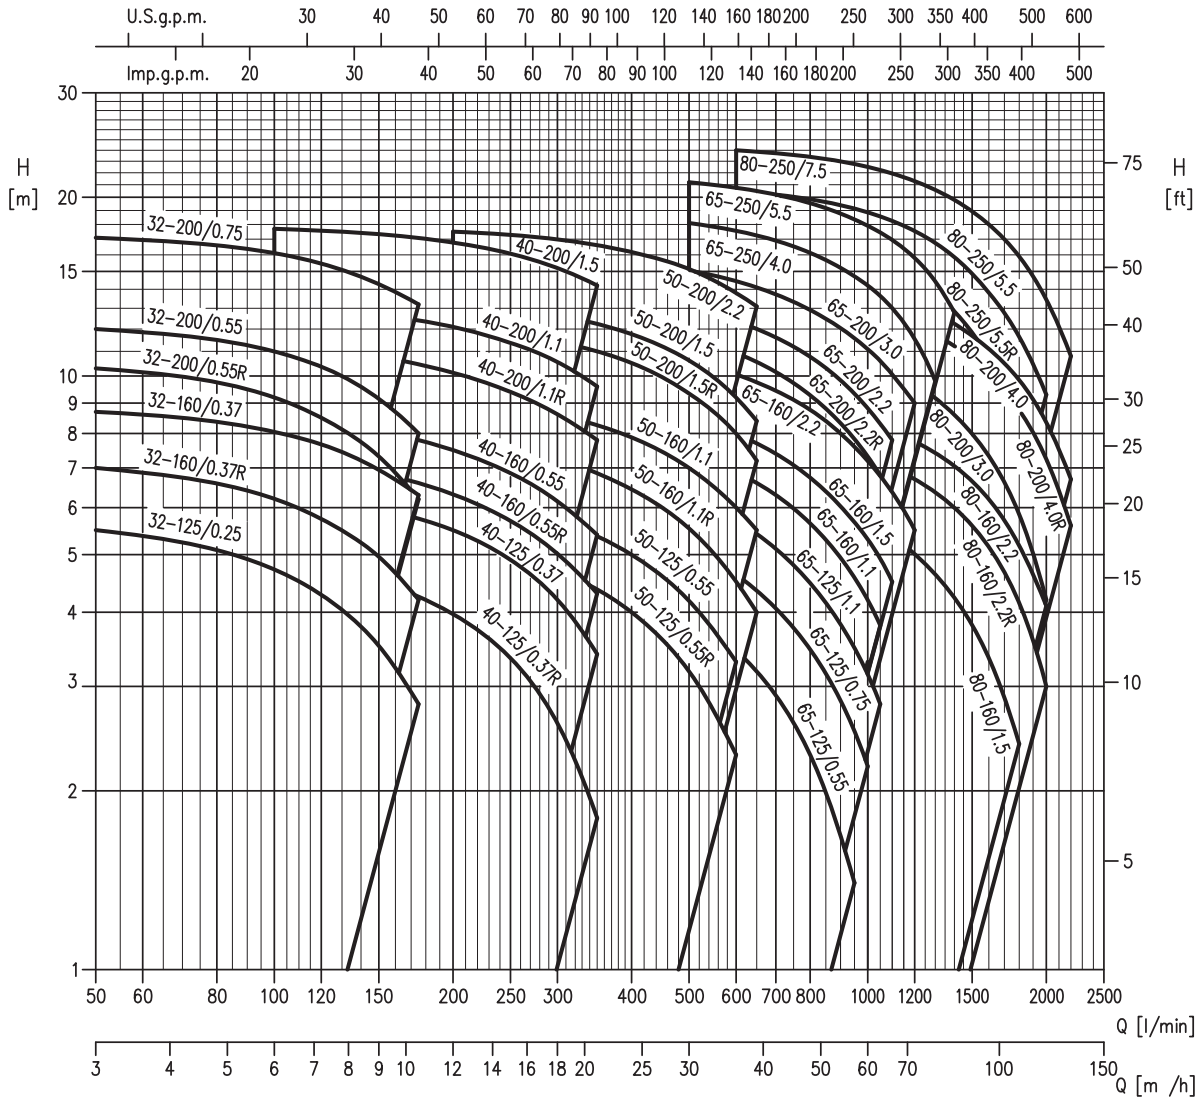

	Versions	3M4	3S4	3P4	3LM4	3LS4	3LP4
Pump	32-125	√	√	√	√	√	√
	32-160	√	√	√	√	√	√
	32-200	√	√	√	√	√	√
	40-125	√	√	√	√	√	√
	40-160	√	√	√	√	√	√
	40-200	√	√	√	√	√	√
	50-125	√	√	√	√	√	√
	50-160	√	√	√	√	√	√
	50-200	√	√	√	√	√	√
	65-125	√	√	√	√	√	√
	65-160	√	√	√	√	√	√
	65-200	√	√	√	√	√	√
	65-250	-	-	-	•	•	•
	80-160	-	-	-	•	•	•
	80-200	-	-	-	•	•	•
80-250	-	-	-	•	•	•	

√ = Models also available in the H and HS version for 32, 40, 50, 65-125/160/200

• = Models also available in the H and E version for 65-250, 80

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

32-40-50 PERFORMANCE TABLE

4 Poles

Model	P ₂		Q=Flow rate														
	[HP]	[kW]	H=Head [m]														
			l/min m ³ /h	50 3	100 6	150 9	175 10,5	200 12	250 15	300 18	350 21	400 24	500 30	600 36	650 39		
32-125/0.25	0,33	0,25	5,5	4,7	3,5	2,8	-	-	-	-	-	-	-	-	-	-	-
32-160/0.37R	0,5	0,37	7,0	6,2	5,0	4,2	-	-	-	-	-	-	-	-	-	-	-
32-160/0.37	0,5	0,37	8,7	8,1	7,0	6,3	-	-	-	-	-	-	-	-	-	-	-
32-200/0.55R	0,75	0,55	10,3	9,2	7,3	6,2	-	-	-	-	-	-	-	-	-	-	-
32-200/0.55	0,75	0,55	12,0	11,0	9,2	8,0	-	-	-	-	-	-	-	-	-	-	-
32-200/0.75	1	0,75	17,1	16,1	14,3	13,2	-	-	-	-	-	-	-	-	-	-	-
40-125/0.37R	0,5	0,37	-	4,8	4,5	4,3	4,0	3,4	2,6	1,8	-	-	-	-	-	-	-
40-125/0.37	0,5	0,37	-	6,3	6,0	5,8	5,5	4,9	4,2	3,4	-	-	-	-	-	-	-
40-160/0.55R	0,75	0,55	-	7,3	6,9	6,6	6,3	5,7	5,0	4,3	-	-	-	-	-	-	-
40-160/0.55	0,75	0,55	-	8,6	8,1	7,8	7,5	6,9	6,2	5,4	-	-	-	-	-	-	-
40-200/1.1R	1,5	1,1	-	11,2	10,8	10,5	10,1	9,4	8,6	7,8	-	-	-	-	-	-	-
40-200/1.1	1,5	1,1	-	13,2	12,7	12,4	12,1	11,4	10,6	9,6	-	-	-	-	-	-	-
40-200/1.5	2	1,5	-	17,7	17,3	17,1	16,8	16,1	15,2	14,2	-	-	-	-	-	-	-
50-125/0.55R	0,75	0,55	-	-	-	-	5,2	5,0	4,7	4,4	4,0	3,2	2,3	-	-	-	-
50-125/0.55	0,75	0,55	-	-	-	-	6,2	6,0	5,7	5,4	5,0	4,2	3,3	-	-	-	-
50-160/1.1R	1,5	1,1	-	-	-	-	7,8	7,6	7,2	6,9	6,4	5,5	4,5	4,0	-	-	-
50-160/1.1	1,5	1,1	-	-	-	-	9,1	8,9	8,6	8,3	7,9	7,0	6,0	5,5	-	-	-
50-200/1.5R	2	1,5	-	-	-	-	12,1	11,8	11,4	11,0	10,5	9,3	8,0	7,2	-	-	-
50-200/1.5	2	1,5	-	-	-	-	13,3	13,0	12,7	12,2	11,8	10,6	9,2	8,4	-	-	-
50-200/2.2	3	2,2	-	-	-	-	17,5	17,3	17,0	16,6	16,2	15,1	13,8	13,1	-	-	-

65-80 PERFORMANCE TABLE

4 Poles


Model	P ₂		Q=Flow rate																	
	[HP]	[kW]	H=Head [m]																	
			l/min m ³ /h	300 18	350 21	500 30	600 36	800 48	950 57	1000 60	1050 63	1100 66	1200 72	1300 78	1400 84	1600 96	1800 108	2000 120	2200 132	
65-125/0.55	0,75	0,55	4,8	4,6	4,0	3,5	2,3	1,4	-	-	-	-	-	-	-	-	-	-	-	-
65-125/0.75	1	0,75	6,0	5,8	5,2	4,6	3,5	2,5	2,2	-	-	-	-	-	-	-	-	-	-	-
65-125/1.1	1,5	1,1	7,2	7,0	6,3	5,7	4,5	3,5	3,2	2,8	-	-	-	-	-	-	-	-	-	-
65-160/1.1	1,5	1,1	-	8,1	7,4	6,9	5,7	4,6	4,2	3,8	-	-	-	-	-	-	-	-	-	-
65-160/1.5	2	1,5	-	9,2	8,5	8,0	6,7	5,7	5,3	4,9	4,5	-	-	-	-	-	-	-	-	-
65-160/2.2	3	2,2	-	11,3	10,6	10,1	8,8	7,6	7,2	6,8	6,4	5,5	-	-	-	-	-	-	-	-
65-200/2.2R	3	2,2	-	12,4	11,6	10,9	9,3	7,8	7,3	6,8	-	-	-	-	-	-	-	-	-	-
65-200/2.2	3	2,2	-	13,9	13,0	12,4	10,8	9,3	8,8	8,3	7,8	-	-	-	-	-	-	-	-	-
65-200/3	4	3	-	15,8	15,1	14,4	12,9	11,6	11,1	10,6	10,1	9,0	-	-	-	-	-	-	-	-
65-250/4	5,5	4	-	-	18,1	17,6	16,1	14,7	14,2	13,7	13,0	11,6	9,8	-	-	-	-	-	-	-
65-250/5.5	7,5	5,5	-	-	21,2	20,8	19,6	18,4	17,9	17,5	17,0	15,8	14,4	12,8	-	-	-	-	-	-
80-160/1.5	2	1,5	-	-	-	6,8	6,3	5,9	5,7	5,6	5,4	5,0	4,6	4,2	3,4	2,4	-	-	-	-
80-160/2.2R	3	2,2	-	-	-	8,1	7,8	7,4	7,3	7,1	7,0	6,7	6,4	6,0	5,2	4,2	3,0	-	-	-
80-160/2.2	3	2,2	-	-	-	9,1	8,8	8,4	8,3	8,2	8,0	7,8	7,4	7,1	6,2	5,2	4,1	-	-	-
80-200/3	4	3	-	-	-	12,0	11,5	10,9	10,7	10,4	10,2	9,7	9,2	8,6	7,3	5,9	4,2	-	-	-
80-200/4R	5,5	4	-	-	-	14,4	13,9	13,4	13,2	12,9	12,7	12,2	11,7	11,2	10,1	8,8	7,2	5,6	-	-
80-200/4	5,5	4	-	-	-	15,4	14,9	14,3	14,1	13,9	13,7	13,2	12,8	12,3	11,1	9,9	8,4	6,7	-	-
80-250/5.5R	7,5	5,5	-	-	-	17,7	17,0	16,3	16,0	15,7	15,4	14,6	13,8	12,9	10,7	8,4	-	-	-	-
80-250/5.5	7,5	5,5	-	-	-	20,5	19,9	19,1	18,9	18,6	18,2	17,6	16,8	15,9	13,8	11,7	9,3	-	-	-
80-250/7.5	10	7,5	-	-	-	24,0	23,4	22,8	22,5	22,2	21,9	21,3	20,6	19,8	18,0	15,9	13,5	10,8	-	-

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 32 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

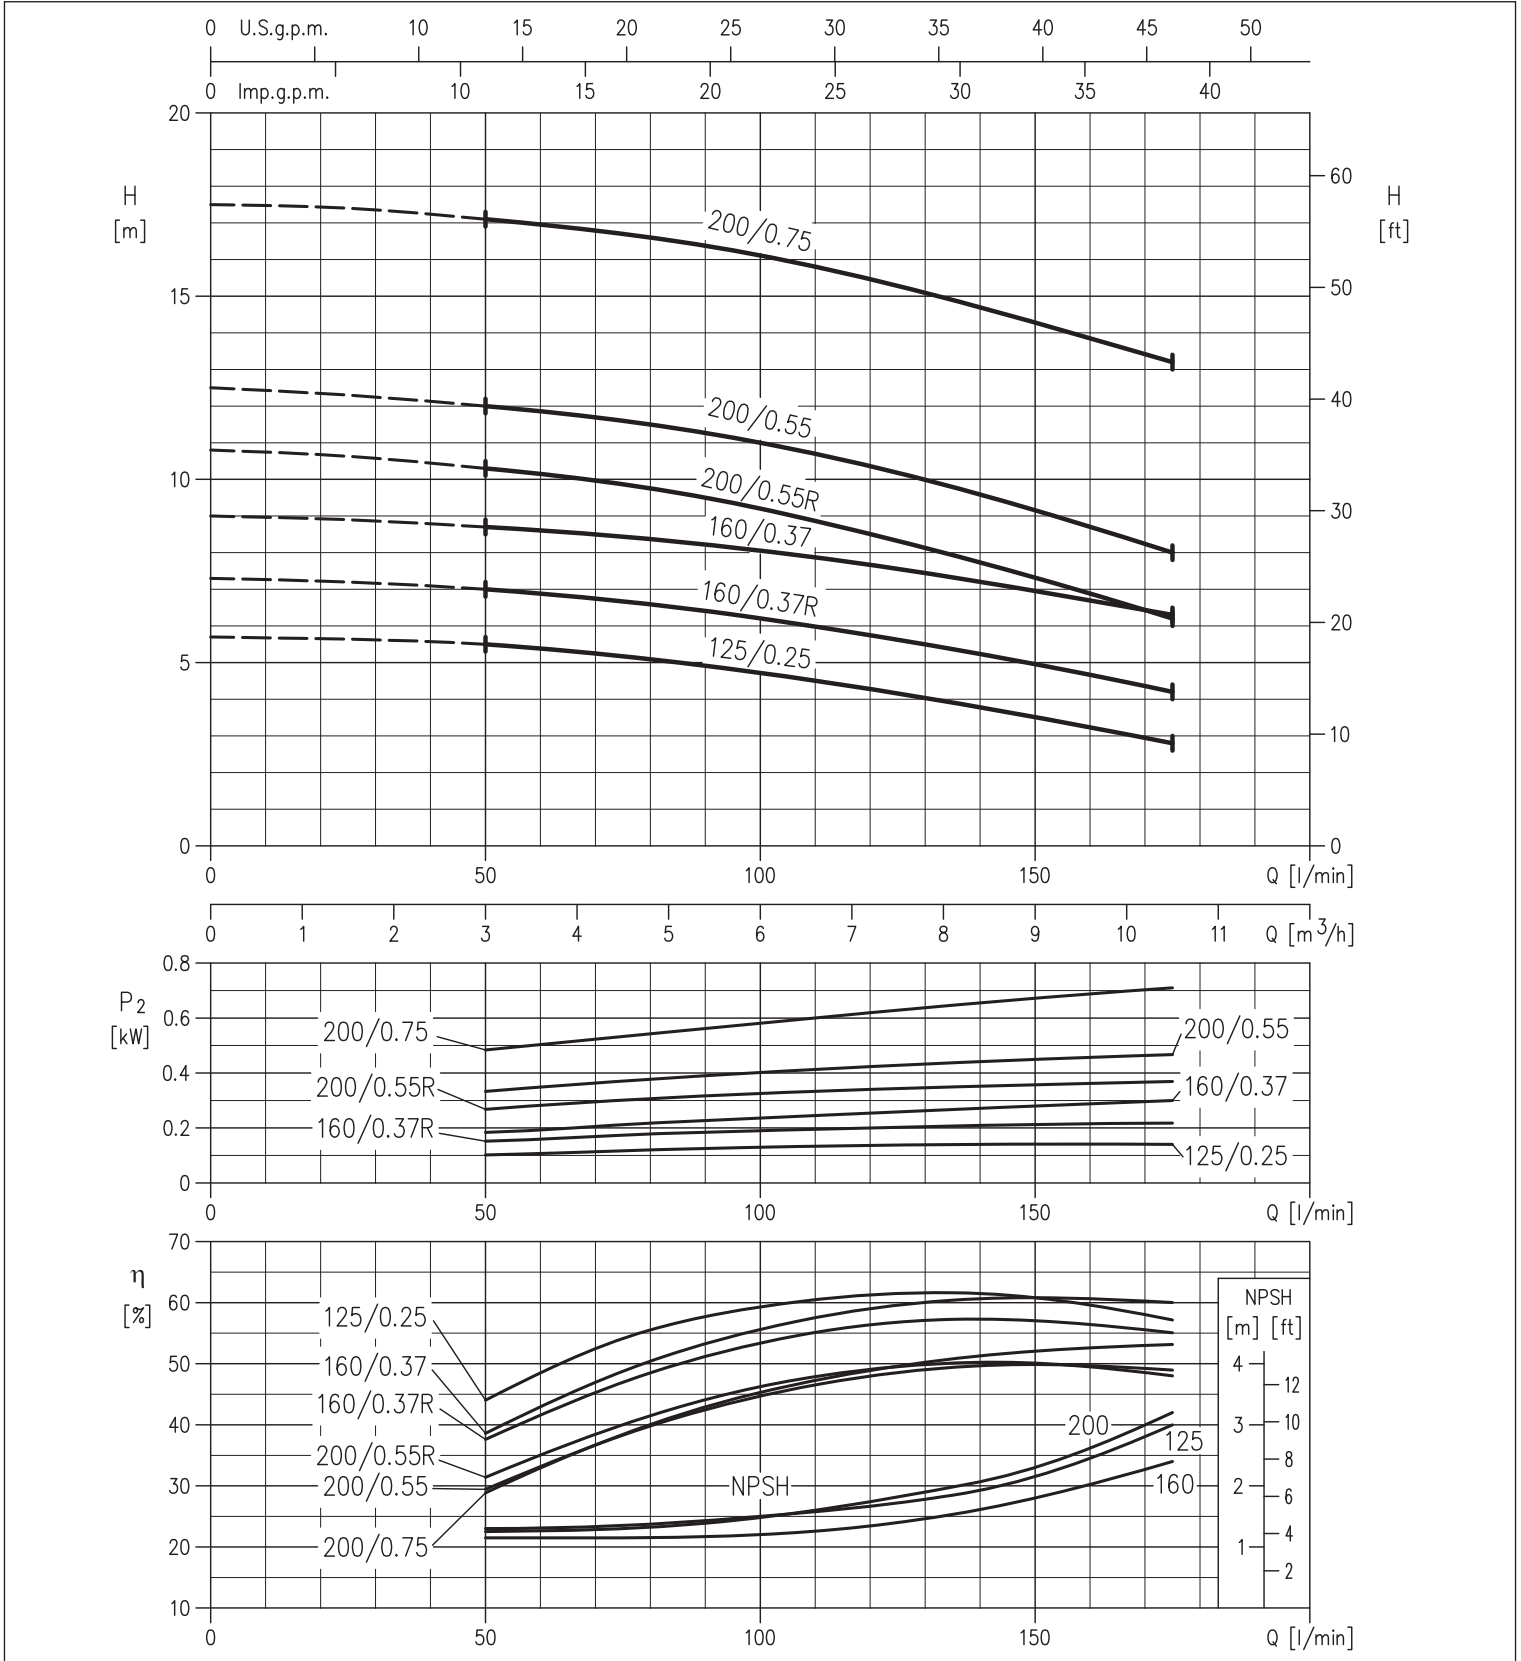


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 40 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

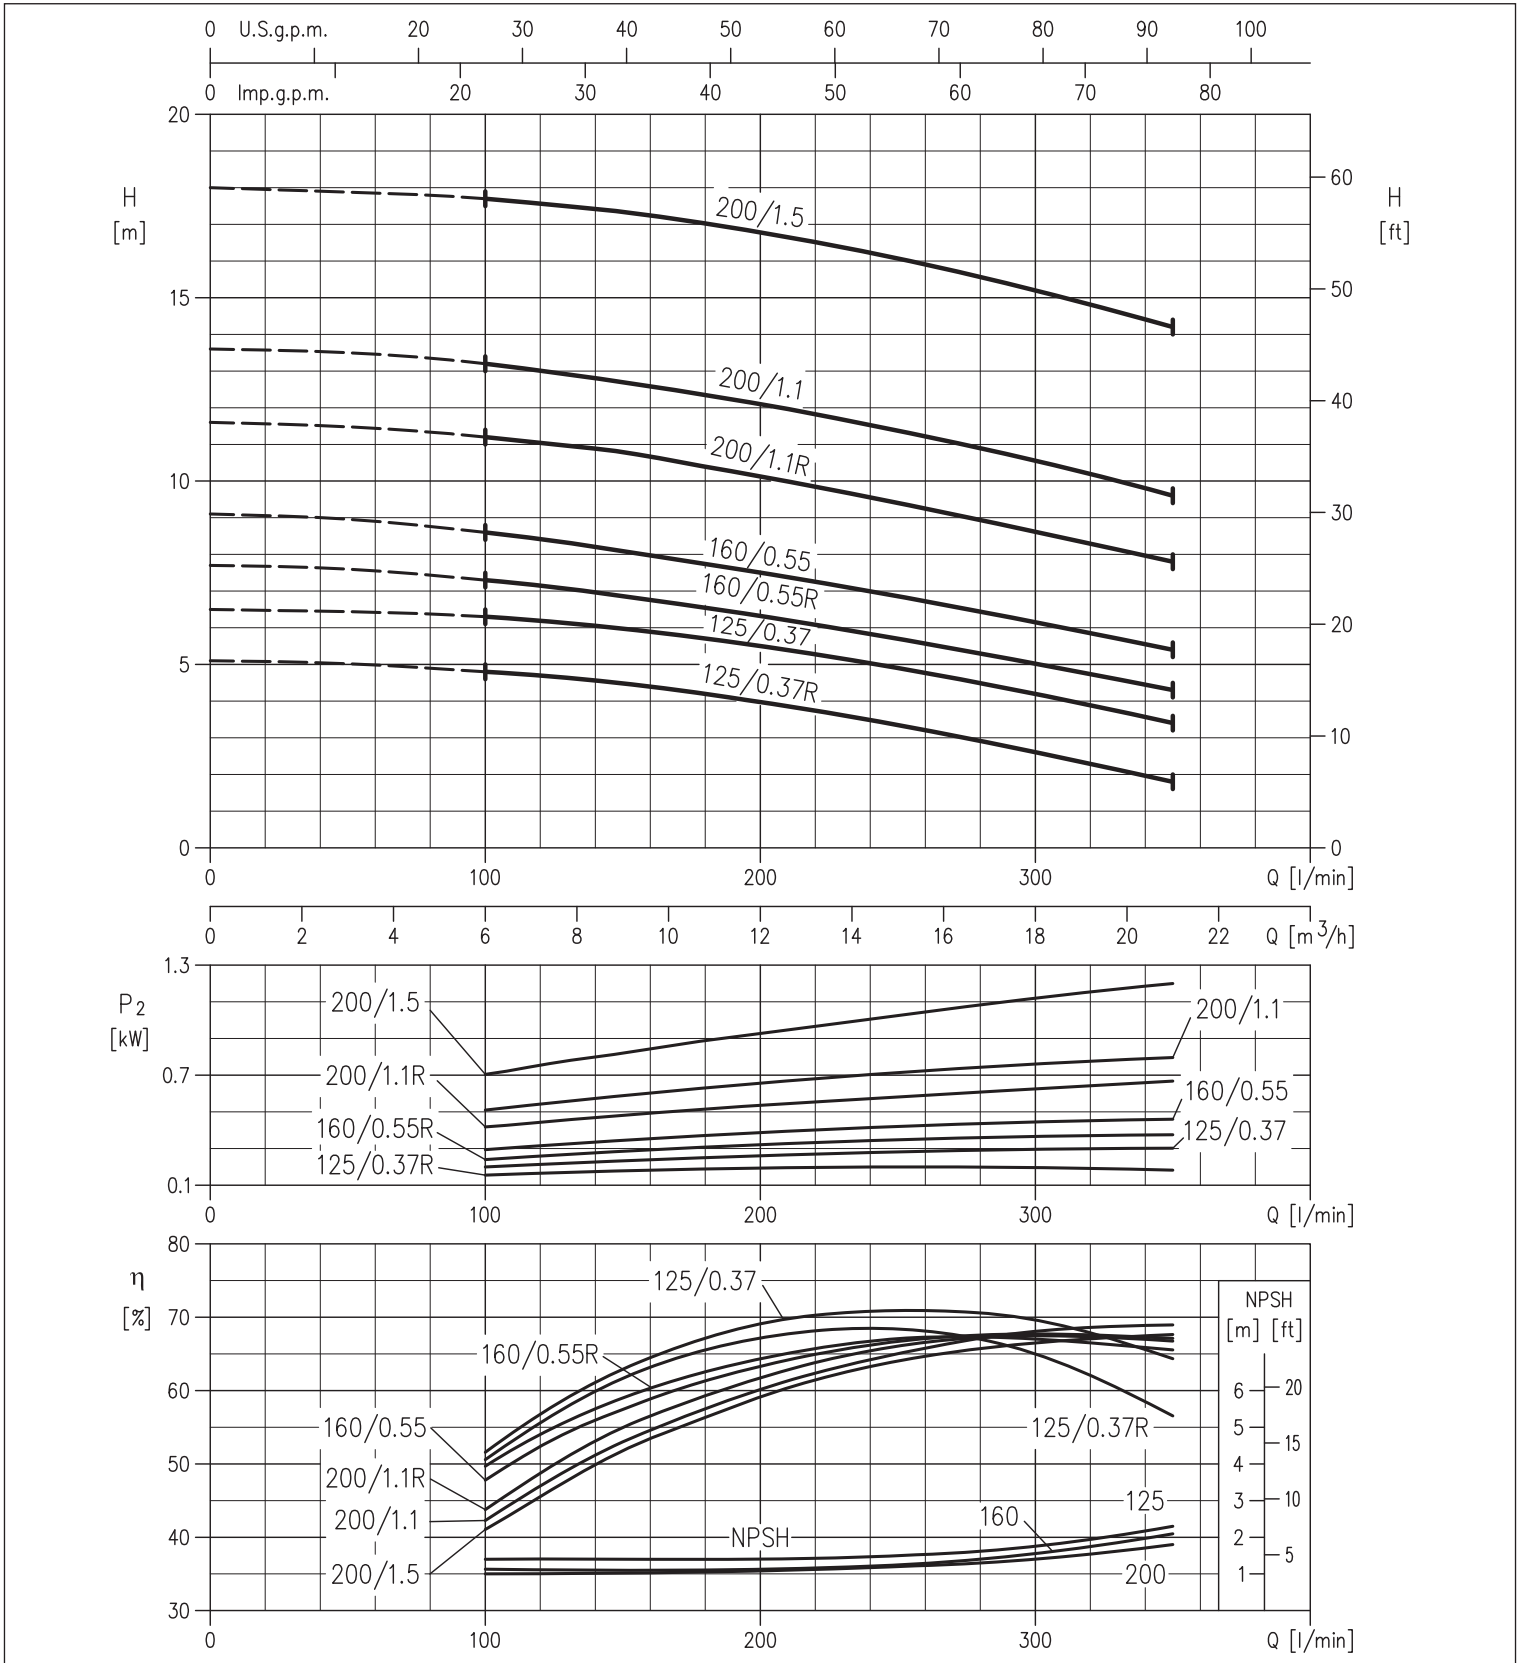


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 50 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

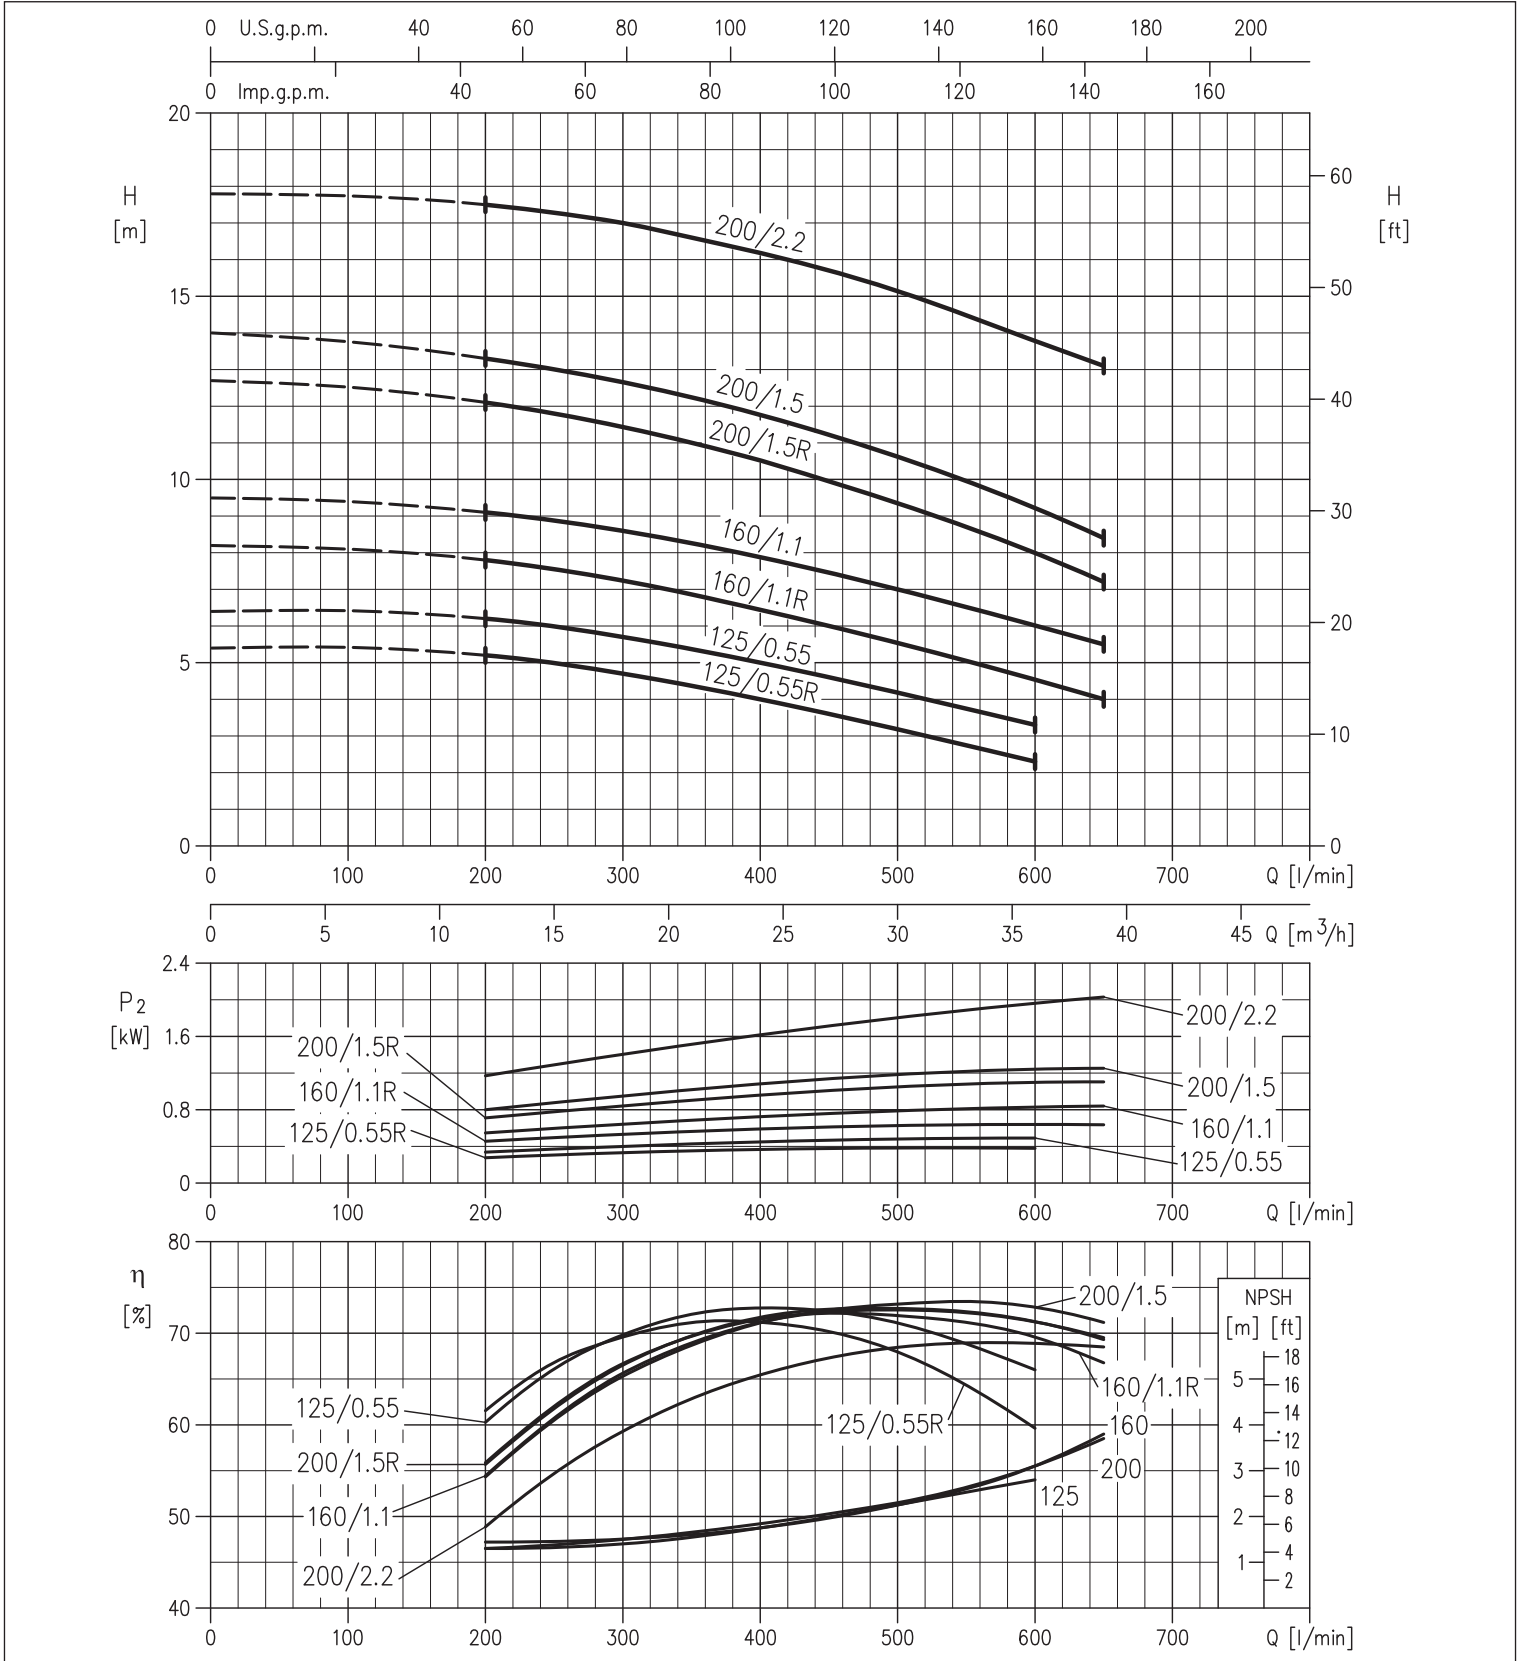


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)M-3(L)S-3(L)P 65 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

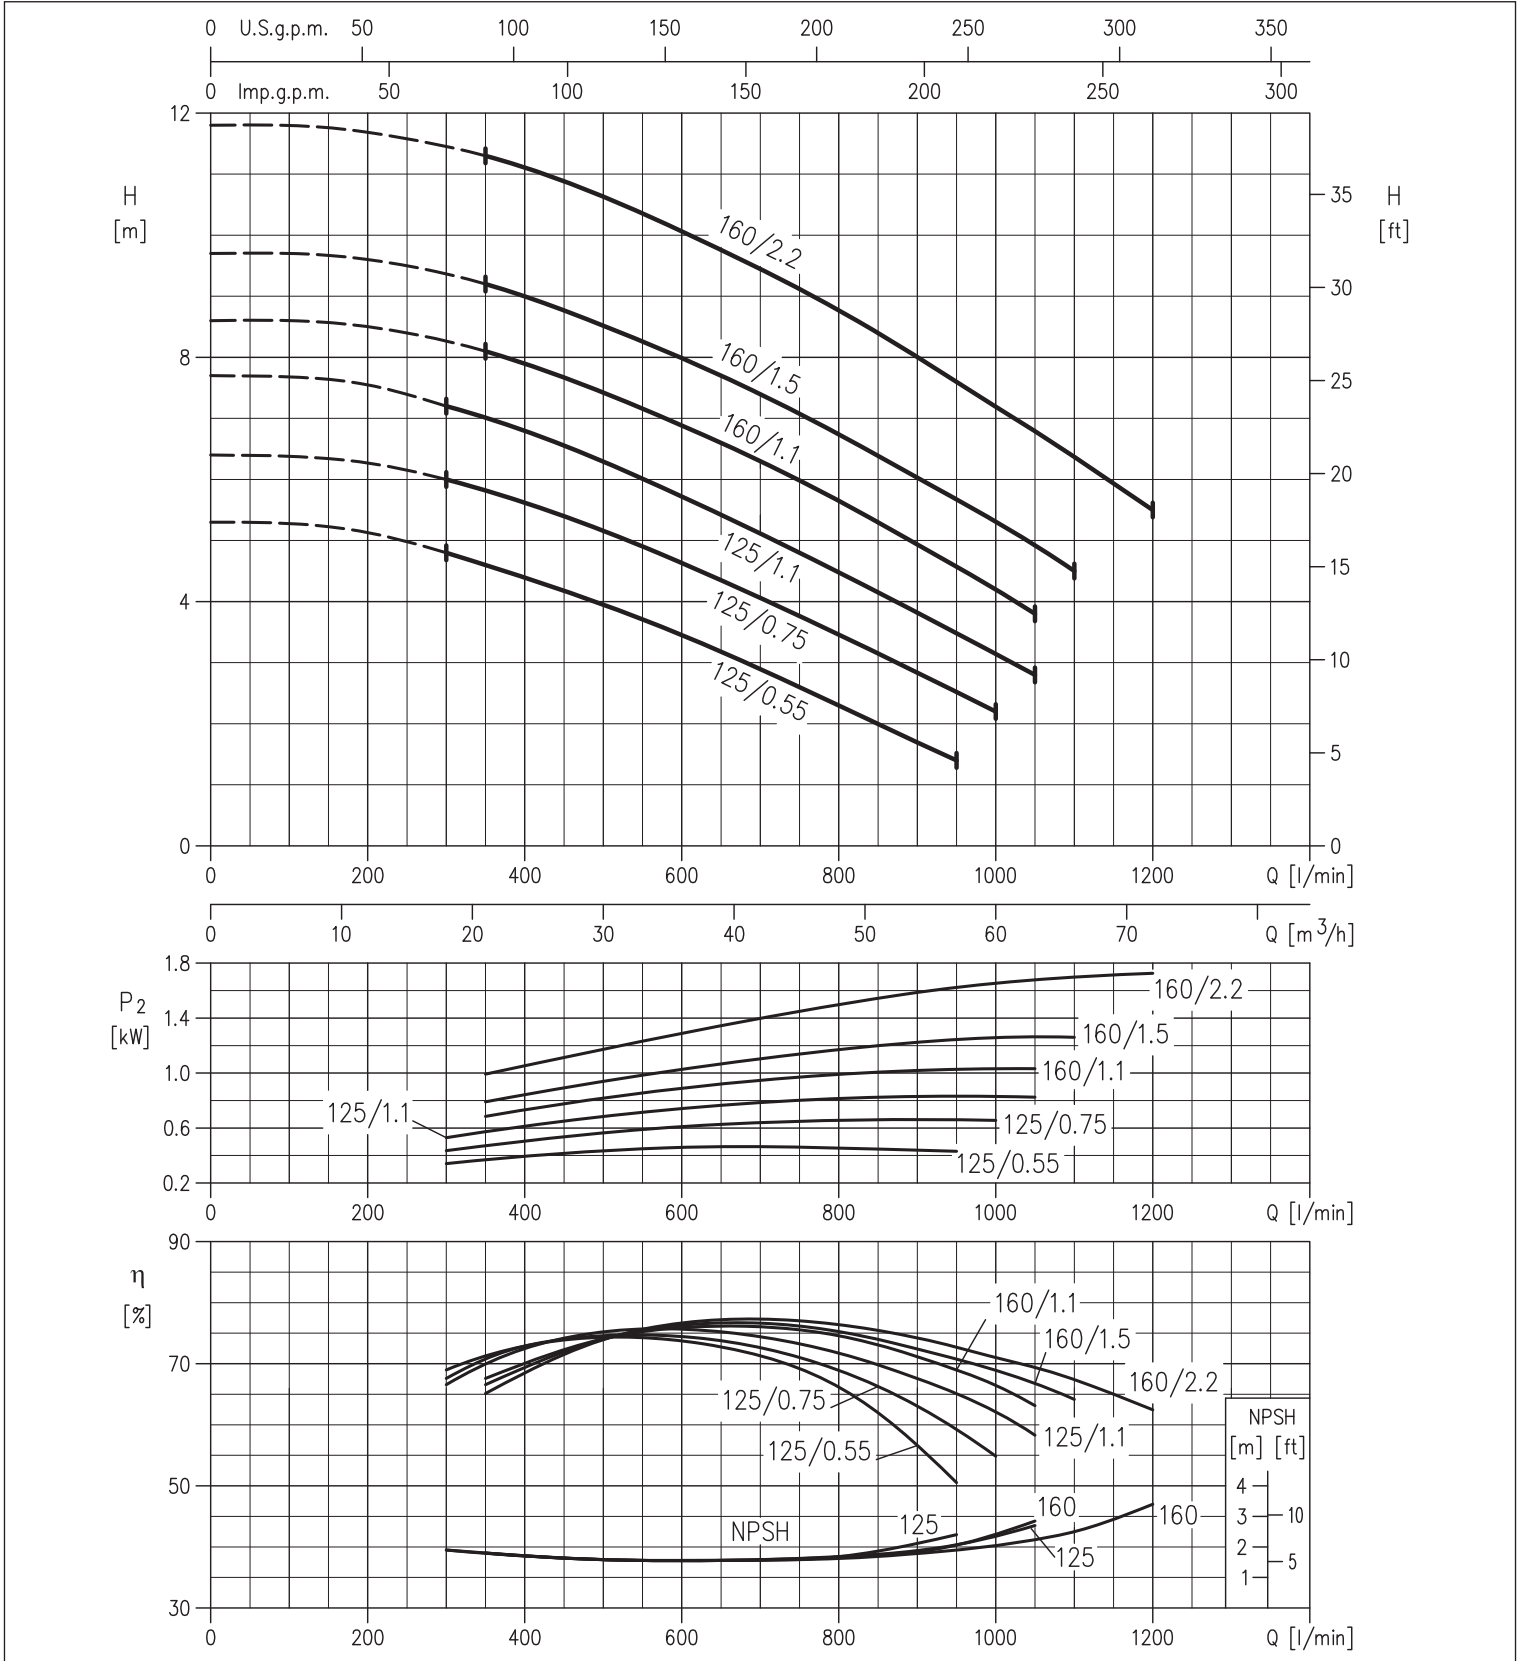


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3L 65 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

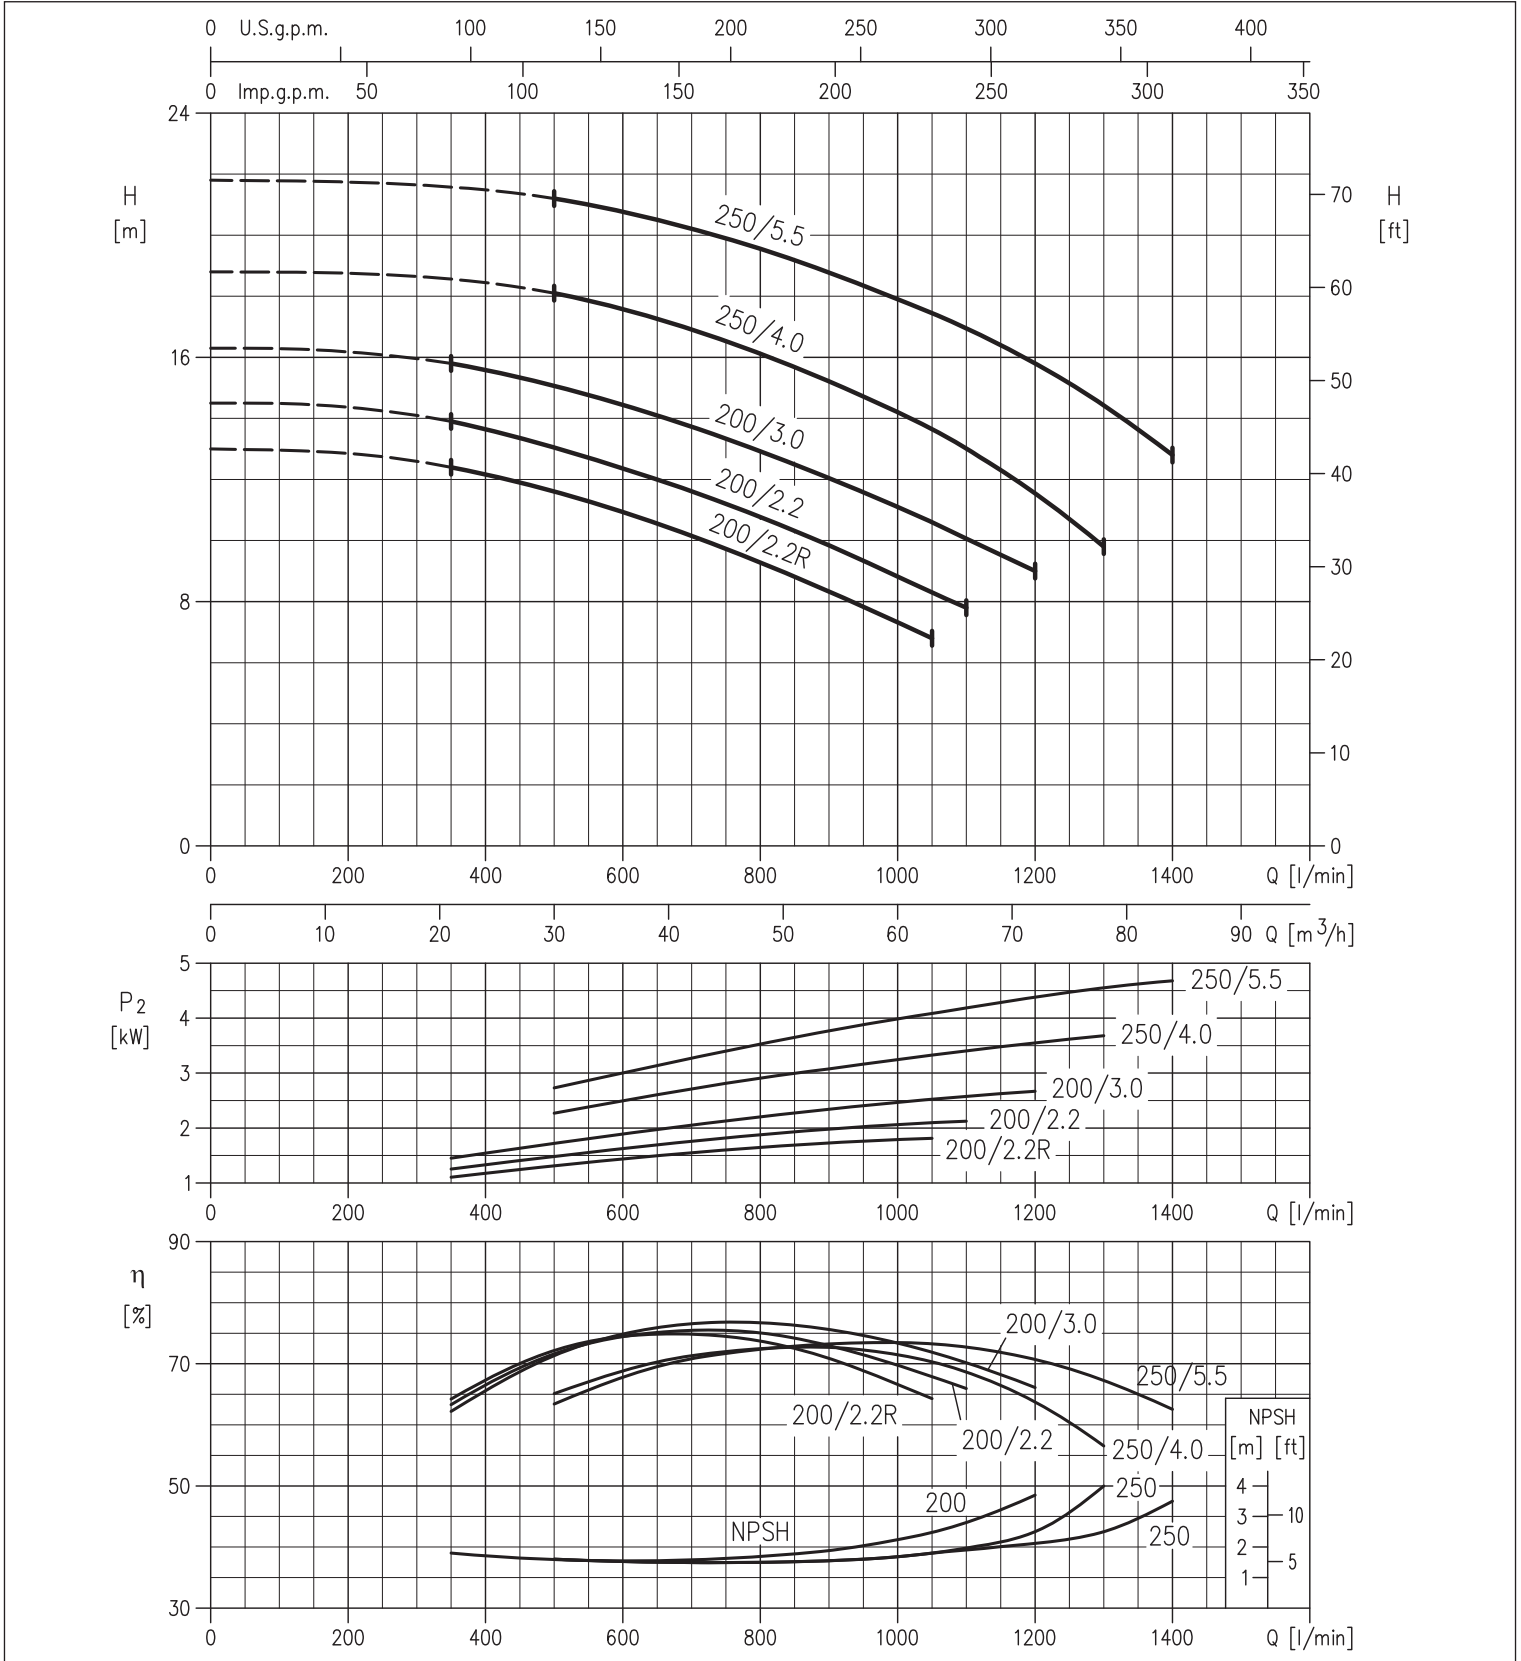


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3L 80 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

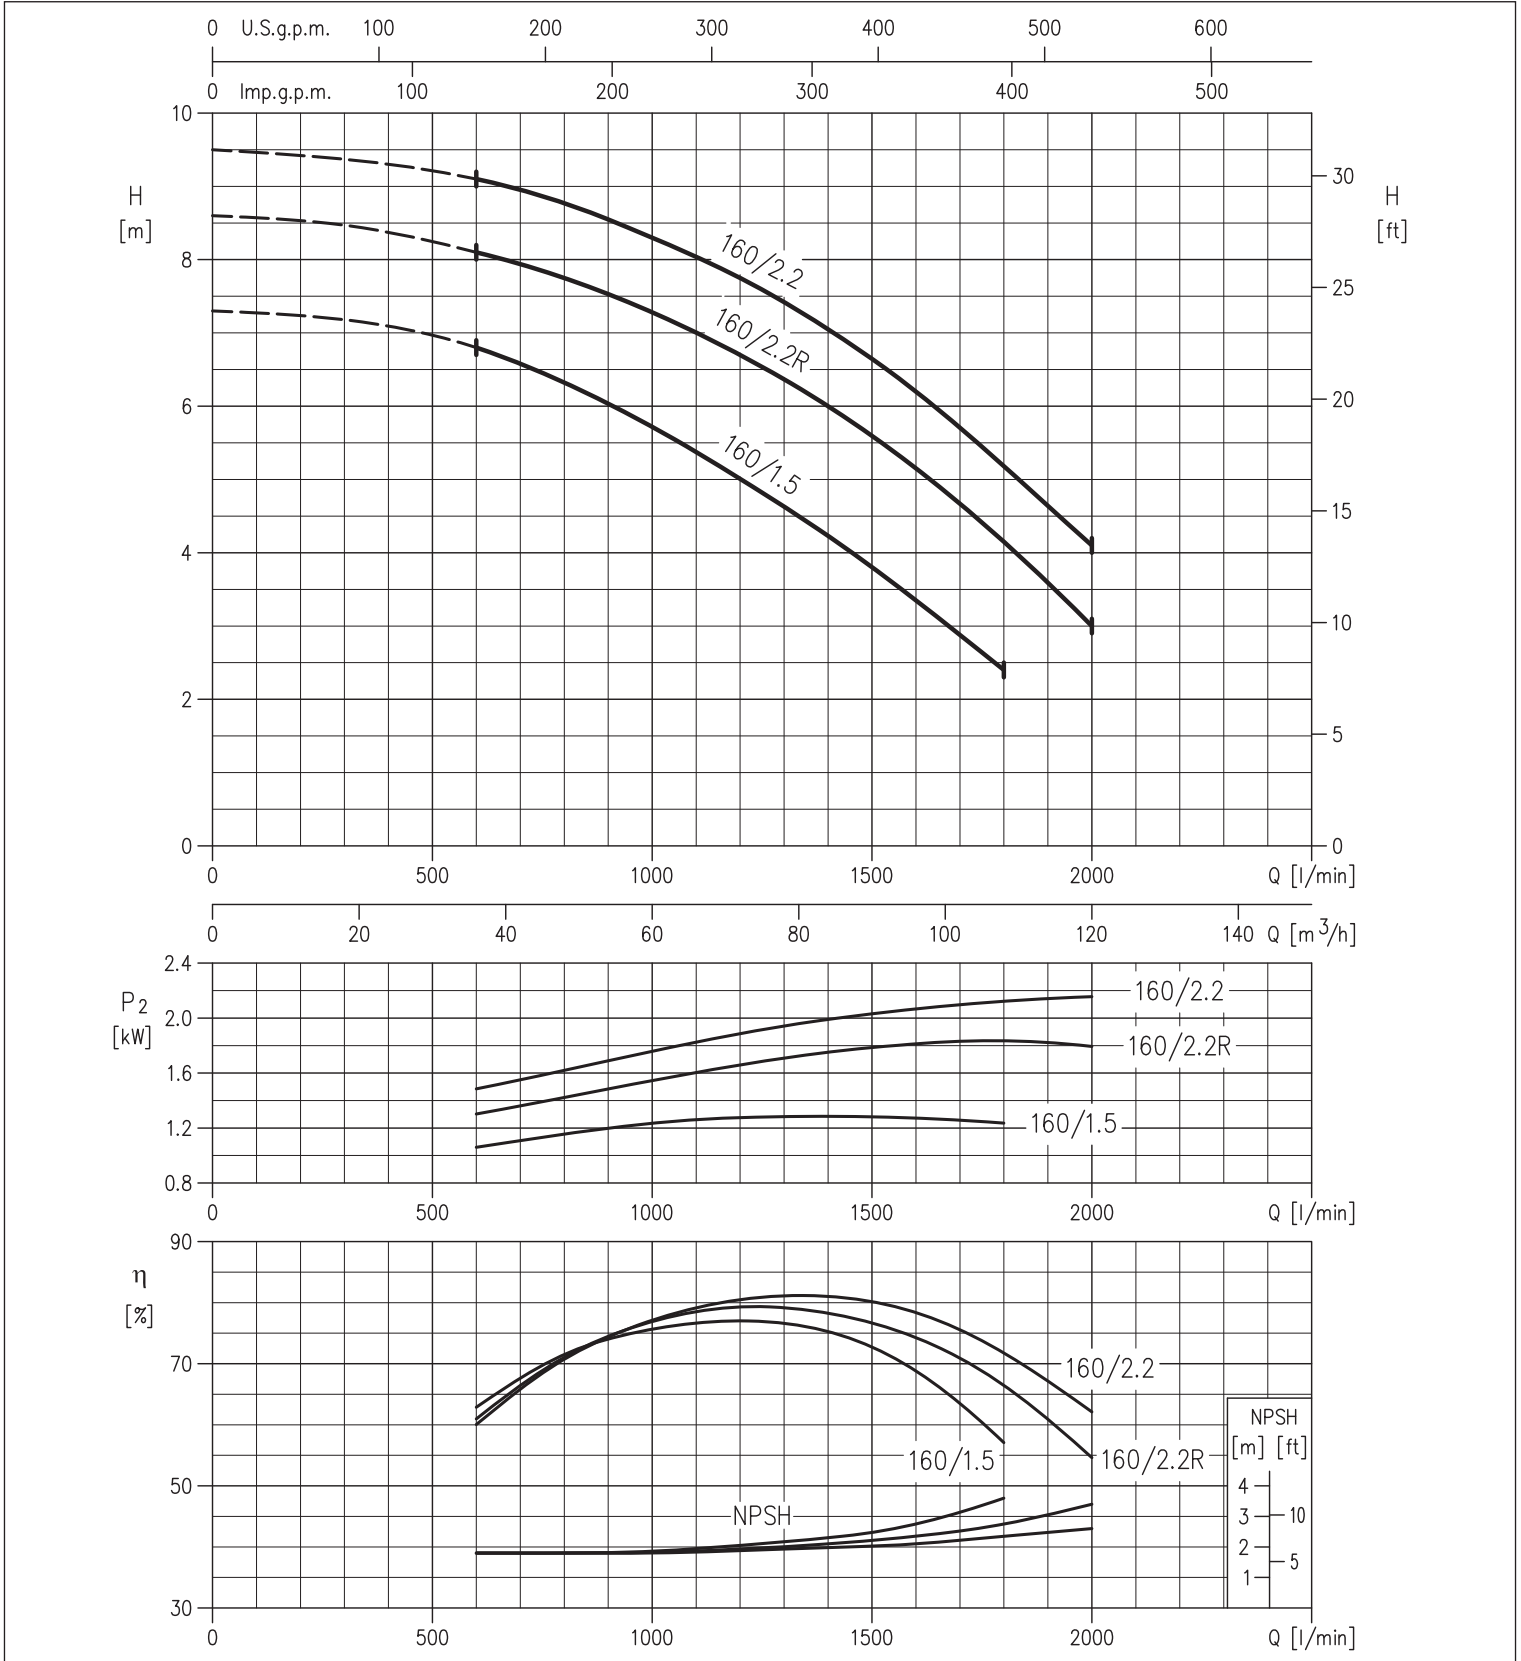




3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3L 80 PERFORMANCE CURVES at 1450 min⁻¹ (according to ISO 9906 Attachment A)

4 Poles

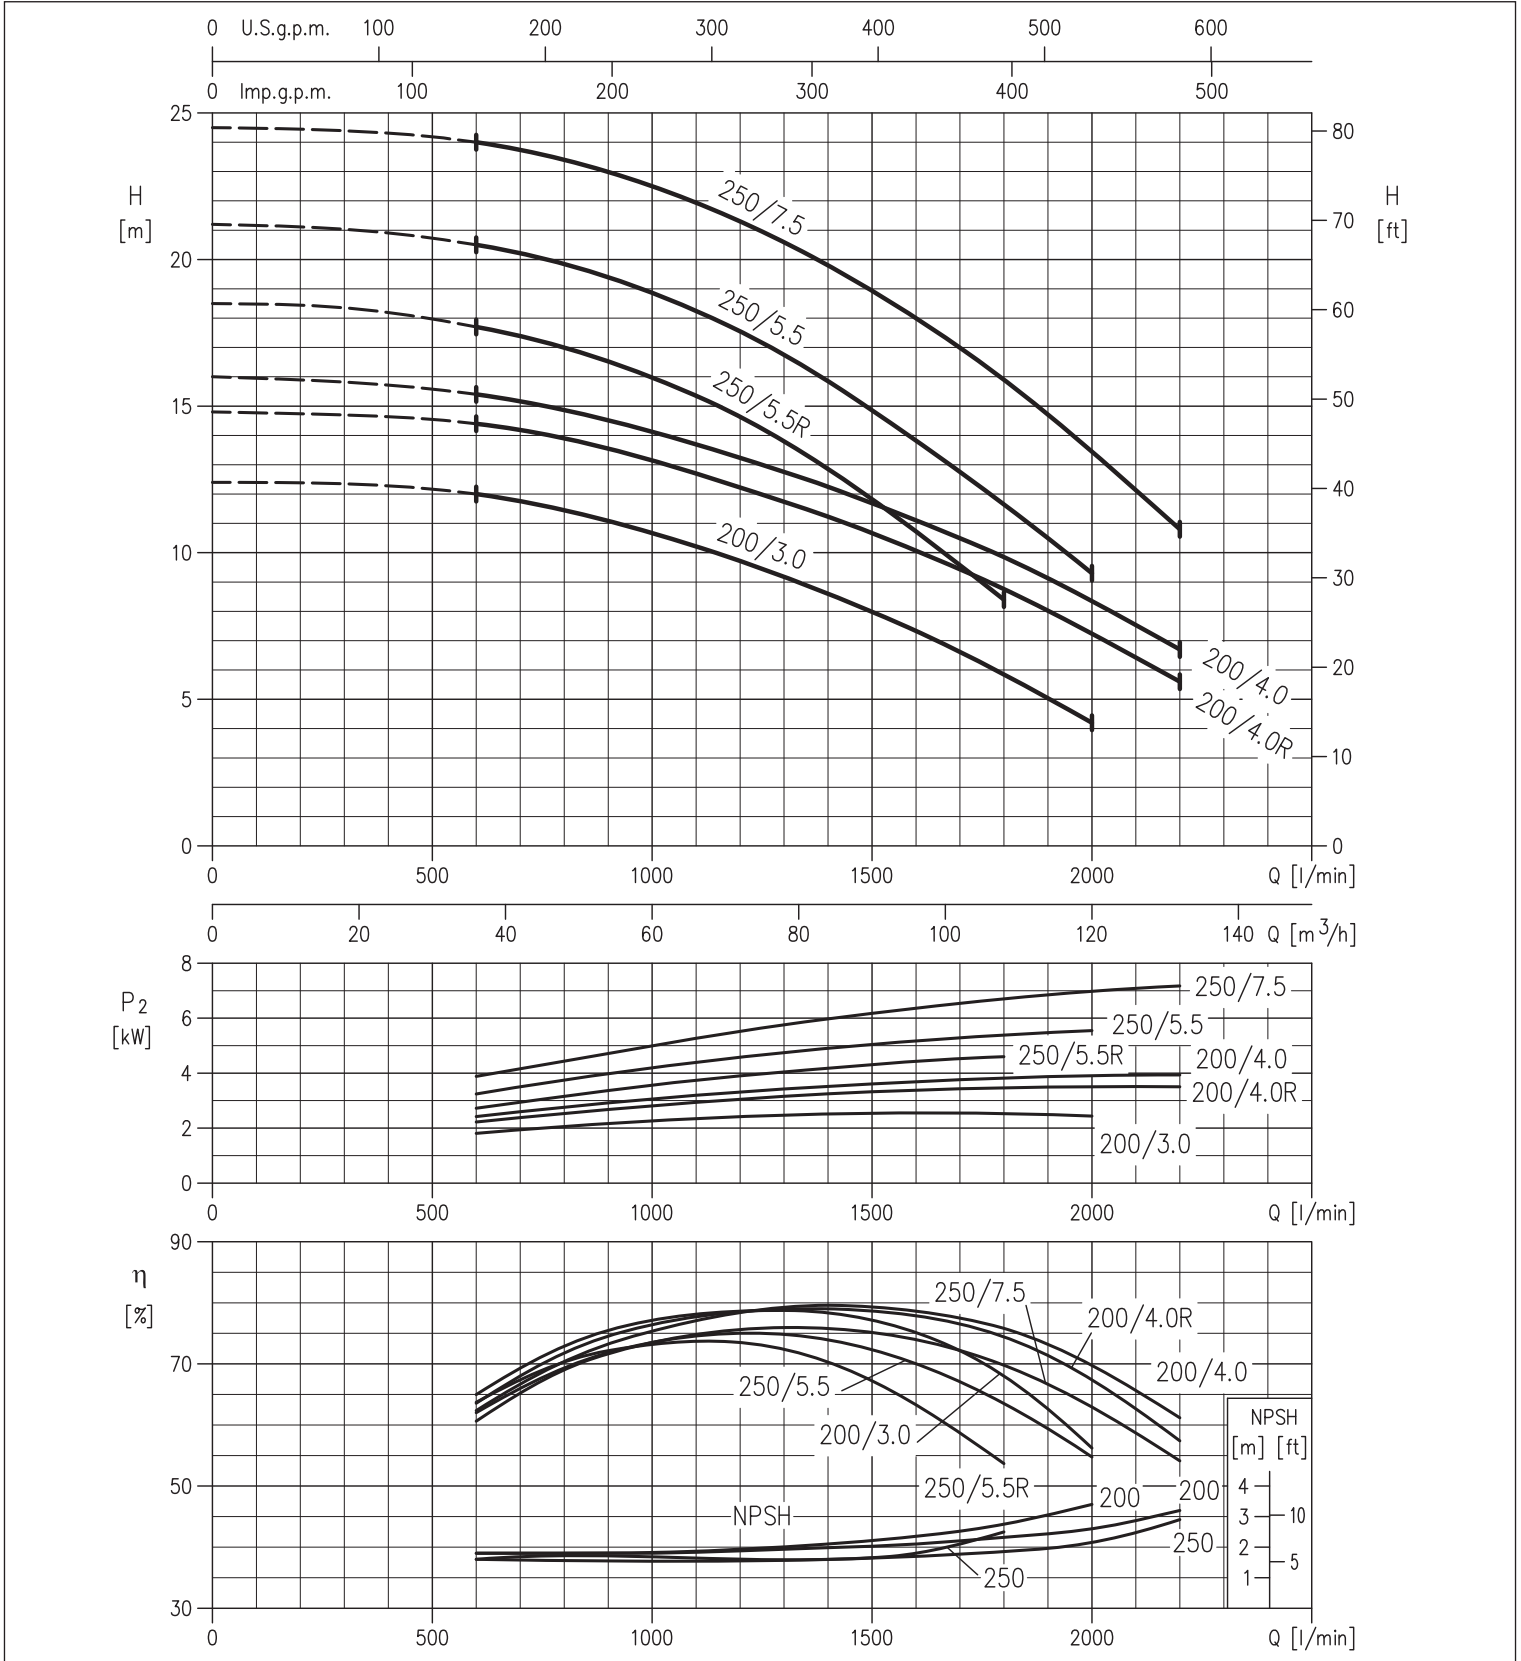


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)M4 32, 40, 50, 65 - up to 65-200

4 Poles

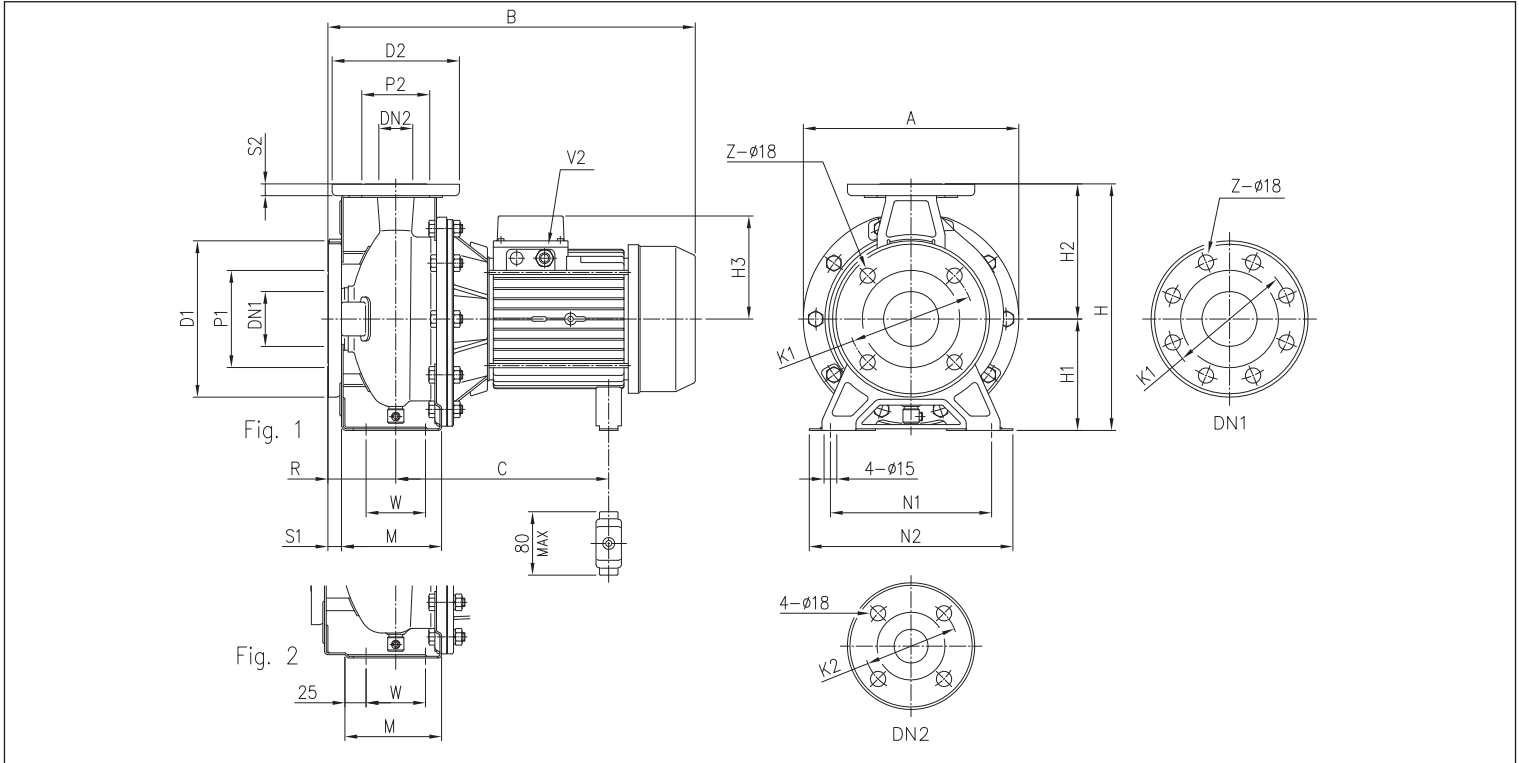

DIMENSIONS TABLE

Model	Dimensions [mm]																							Weight [kg]			
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	R	W	M	N1	N2	A		B	C	V2
32-125/0.25	50	95	125	165	16	4	-	32	75	100	140	14	1	252	112	140	102	80	70	114	140	190	213	371	205	PG 11	15,0
32-160/0.37R	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	119	80	70	118	190	240	254	395	219	PG 11	20,0
32-160/0.37	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	119	80	70	118	190	240	254	395	219	PG 11	20,0
32-200/0.55R	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	119	80	70	119	190	240	296	395	219	PG 11	24,5
32-200/0.55	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	119	80	70	119	190	240	296	395	219	PG 11	24,5
32-200/0.75	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	124	80	70	119	190	240	296	408	219±230	PG 13,5	28,0
40-125/0.37R	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	102	80	70	114	160	210	213	371	205	PG 11	15,5
40-125/0.37	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	102	80	70	114	160	210	213	371	205	PG 11	15,5
40-160/0.55R	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	119	80	70	118	190	240	254	395	219	PG 11	20,5
40-160/0.55	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	119	80	70	118	190	240	254	395	219	PG 11	20,5
40-200/1.1R	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	124	100	70	115	212	265	296	428	219±230	PG 13,5	28,5
40-200/1.1	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	124	100	70	115	212	265	296	428	219±230	PG 13,5	28,5
40-200/1.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	124	100	70	115	212	265	296	428	219±230	PG 13,5	30,5
50-125/0.55R	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	119	100	70	114	190	240	254	415	219	PG 11	20,5
50-125/0.55	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	119	100	70	114	190	240	254	415	219	PG 11	20,5
50-160/1.1R	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	124	100	70	115	212	265	296	428	219±230	PG 13,5	28,5
50-160/1.1	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	124	100	70	115	212	265	296	428	219±230	PG 13,5	25,5
50-200/1.5R	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	124	100	70	115	212	265	296	428	219±230	PG 13,5	30,5
50-200/1.5	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	124	100	70	115	212	265	296	428	219±230	PG 13,5	31,5
50-200/2.2	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	141	100	70	115	212	265	296	474	253	PG 16	36,0
65-125/0.55	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	119	100	95	140	212	280	254	415	219	PG 11	18,5
65-125/0.75	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	124	100	95	140	212	280	254	428	219±230	PG 13,5	20,0
65-125/1.1	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	124	100	95	140	212	280	254	428	219±230	PG 13,5	20,0
65-160/1.1	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	124	100	95	140	212	280	296	428	219±230	PG 13,5	28,5
65-160/1.5	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	124	100	95	140	212	280	296	428	219±230	PG 13,5	30,0
65-160/2.2	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	141	100	95	140	212	280	296	474	253	PG 16	37,0
65-200/2.2R	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	141	100	95	140	250	320	296	474	253	PG 16	34,5
65-200/2.2	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	141	100	95	140	250	320	296	474	253	PG 16	35,0
65-200/3	80	134	160	200	18	8	4	65	115	145	185	16	2	405	180	225	141	100	95	140	250	320	296	474	253	PG 16	40,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LM4 65-250, 80

4 Poles

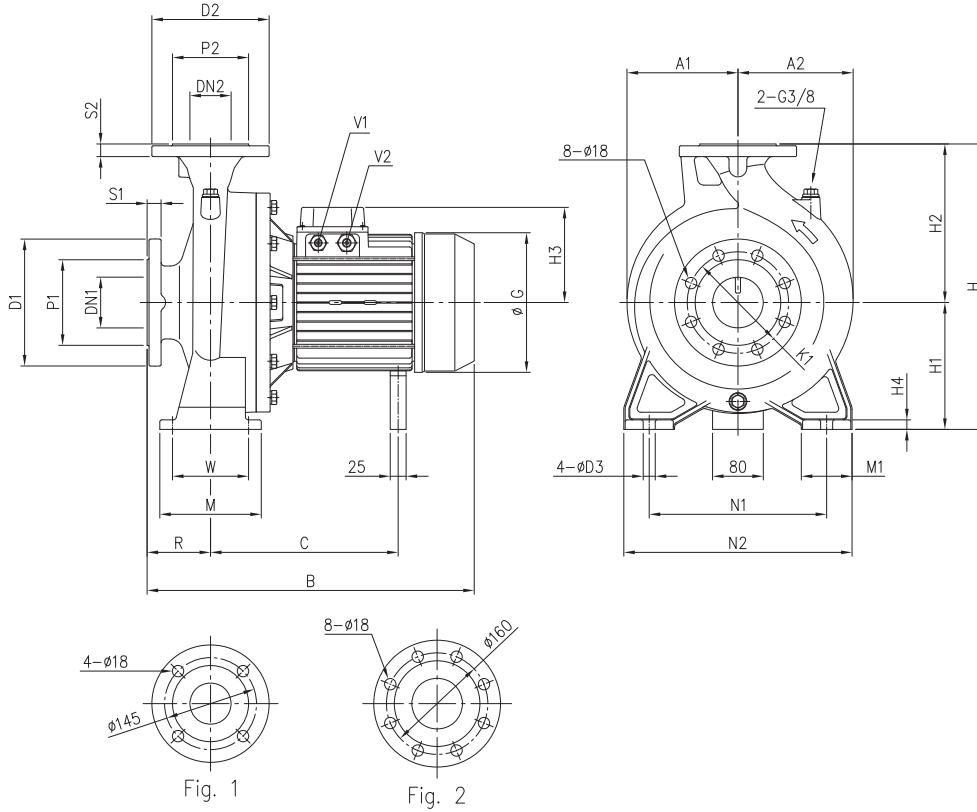

DIMENSIONS TABLE


Model	Dimensions [mm]																							Weight [kg]					
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	R	W	N1	N2	M	M1	A1	A2	B		C	G	D3	V1	V2
65-250/4	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	150	15	100	120	280	360	160	80	175	182	515	295	220	19	PG13,5	PG16	82,0
65-250/5.5	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	178	15	100	120	280	360	160	80	175	182	611	376	259	19	PG13,5	PG21	94,5
80-160/1.5	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	124	13	125	95	250	320	125	65	147	173	453	219÷230	176	15	-	PG13,5	53,0
80-160/2.2R	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	141	13	125	95	250	320	125	65	147	173	499	253	193	15	-	PG16	56,0
80-160/2.2	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	141	13	125	95	250	320	125	65	147	173	499	253	193	15	-	PG16	59,0
80-200/3	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	141	13	125	95	280	345	125	65	175	182	521	275	193	15	-	PG16	73,0
80-200/4R	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	150	13	125	95	280	345	125	65	175	182	540	295	220	15	PG13,5	PG16	81,0
80-200/4	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	150	13	125	95	280	345	125	65	175	182	540	295	220	15	PG13,5	PG16	81,0
80-250/5.5R	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	178	15	125	120	315	400	160	80	175	192	636	376	259	19	PG13,5	PG21	95,0
80-250/5.5	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	178	15	125	120	315	400	160	80	175	192	636	376	259	19	PG13,5	PG21	95,0
80-250/7.5	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	178	15	125	120	315	400	160	80	175	192	636	376	259	19	PG13,5	PG21	100,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S4 32, 40, 50, 65 - up to 1.5 kW

4 Poles

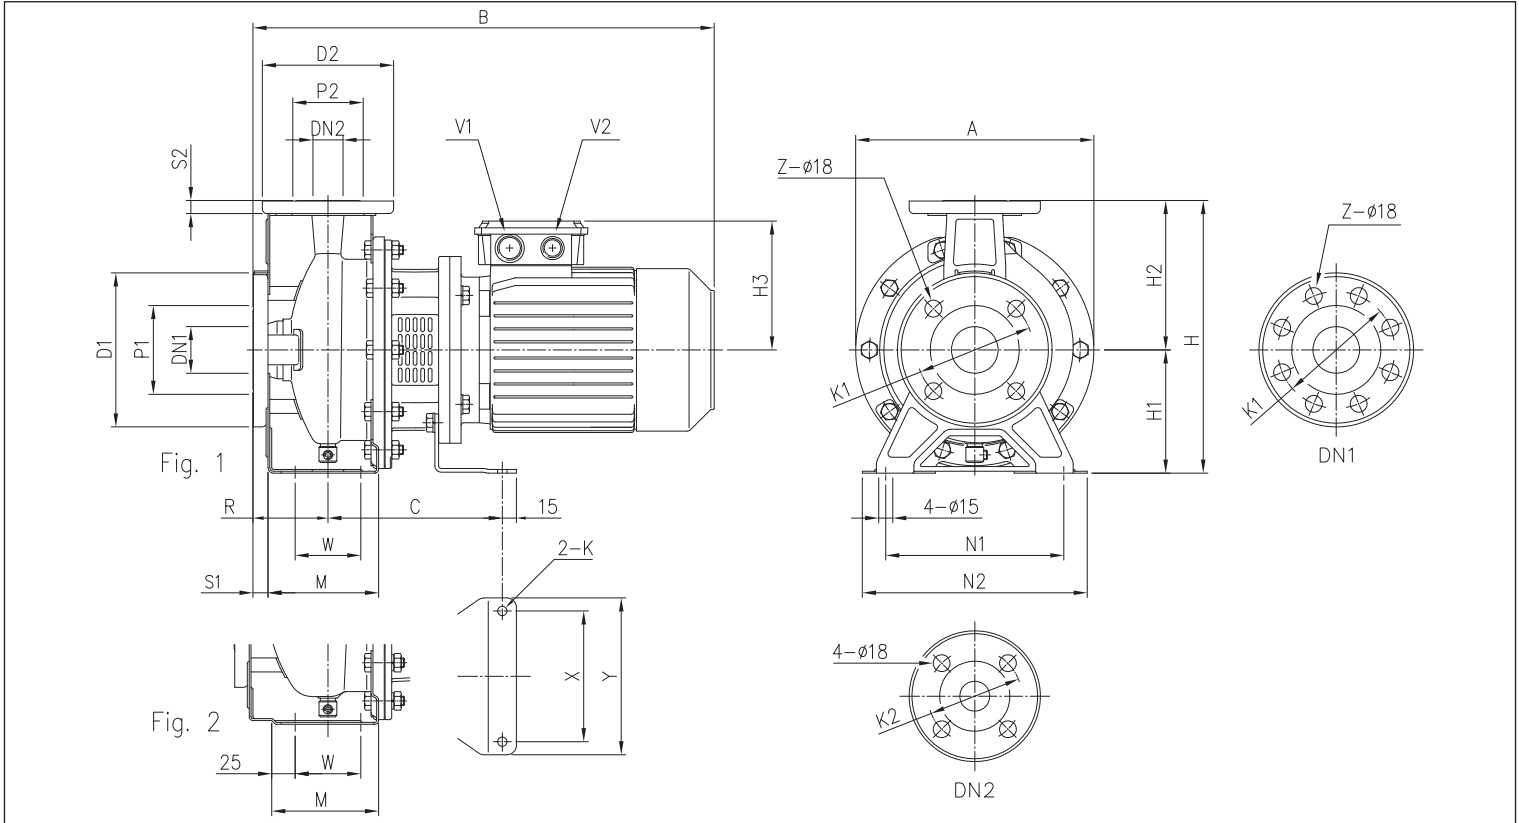

DIMENSIONS TABLE

Model	Dimensions [mm]																										Weight [kg]				
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	[1]	[2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	Fig.	H	H1	H2	H3	R	W	M	N1	N2	A	B	C	X		Y	K	V1	V2
32-125/0.25	50	95	125	165	16	4	-	32	75	100	140	14	1	252	112	140	112	80	70	114	140	190	213	403	153	112	140	8	M20x1,5	M16x1,5	15,5
32-160/0.37R	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	112	80	70	118	190	240	254	403	153	112	140	8	M20x1,5	M16x1,5	18,5
32-160/0.37	50	95	125	165	16	4	-	32	75	100	140	14	1	292	132	160	112	80	70	118	190	240	254	403	153	112	140	8	M20x1,5	M16x1,5	18,5
32-200/0.55R	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	129	80	70	119	190	240	296	430	174	140	168	10	M25x1,5	M20x1,5	28,0
32-200/0.55	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	129	80	70	119	190	240	296	430	174	140	168	10	M25x1,5	M20x1,5	28,0
32-200/0.75	50	95	125	165	16	4	-	32	75	100	140	14	1	340	160	180	129	80	70	119	190	240	296	430	174	140	168	10	M25x1,5	M20x1,5	29,5
40-125/0.37R	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	112	80	70	114	160	210	213	403	153	112	140	8	M20x1,5	M16x1,5	16,0
40-125/0.37	65	115	145	185	16	4	-	40	80	110	150	14	1	252	112	140	112	80	70	114	160	210	213	403	153	112	140	8	M20x1,5	M16x1,5	16,0
40-160/0.55R	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	129	80	70	118	190	240	254	430	174	140	168	10	M25x1,5	M20x1,5	23,5
40-160/0.55	65	115	145	185	16	4	-	40	80	110	150	14	1	292	132	160	129	80	70	118	190	240	254	430	174	140	168	10	M25x1,5	M20x1,5	23,5
40-200/1.1R	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	34,5
40-200/1.1	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	34,5
40-200/1.5	65	115	145	185	16	4	-	40	80	110	150	14	2	340	160	180	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	35,5
50-125/0.55R	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	129	100	70	114	190	240	254	450	174	140	168	10	M25x1,5	M20x1,5	23,5
50-125/0.55	65	115	145	185	16	4	-	50	95	125	165	16	2	292	132	160	129	100	70	114	190	240	254	450	174	140	168	10	M25x1,5	M20x1,5	23,5
50-160/1.1R	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	34,0
50-160/1.1	65	115	145	185	16	4	-	50	95	125	165	16	2	340	160	180	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	34,0
50-200/1.5R	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	37,0
50-200/1.5	65	115	145	185	16	4	-	50	95	125	165	16	2	360	160	200	138	100	70	115	212	265	296	497	186	140	168	10	M25x1,5	M20x1,5	37,0
65-125/0.55	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	129	100	95	140	212	280	254	450	174	140	168	10	M25x1,5	M20x1,5	21,5
65-125/0.75	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	129	100	95	140	212	280	254	450	174	140	168	10	M25x1,5	M20x1,5	23,0
65-125/1.1	80	134	160	200	18	8	4	65	115	145	185	16	2	340	160	180	138	100	95	140	212	280	254	497	186	140	168	10	M25x1,5	M20x1,5	32,0
65-160/1.1	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	138	100	95	140	212	280	296	497	186	140	168	10	M25x1,5	M20x1,5	36,0
65-160/1.5	80	134	160	200	18	8	4	65	115	145	185	16	2	360	160	200	138	100	95	140	212	280	296	497	186	140	168	10	M25x1,5	M20x1,5	37,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S4 50, 65 - 2.2 ÷ 3 kW

4 Poles

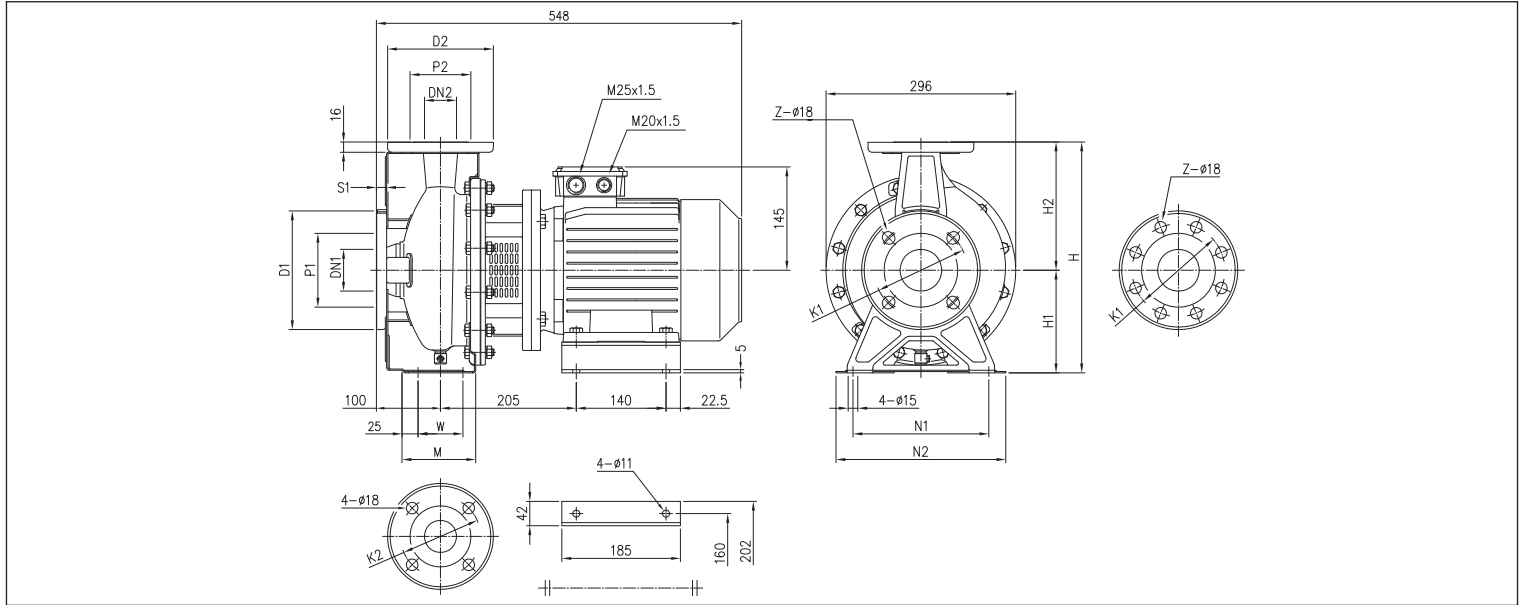


DIMENSIONS TABLE

Model	Dimensions [mm]																			Weight [kg]
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	[1]	Z	[2]	Ø DN2	Ø P2	Ø K2	Ø D2	H	H1	H2	W	M	N1	N2	
50-200/2.2	65	115	145	185	16	4	-	50	95	125	165	165	360	160	200	70	115	212	265	43,0
65-160/2.2	80	134	160	200	18	8	4	65	115	145	185	185	360	160	200	95	140	212	280	46,0
65-200/2.2R	80	134	160	200	18	8	4	65	115	145	185	185	405	180	225	95	140	250	320	42,5
65-200/2.2	80	134	160	200	18	8	4	65	115	145	185	185	405	180	225	95	140	250	320	43,0
65-200/3	80	134	160	200	18	8	4	65	115	145	185	185	405	180	225	95	140	250	320	48,5

[1] Standard
[2] On request

3LS4 80-160/1,5

4 Poles

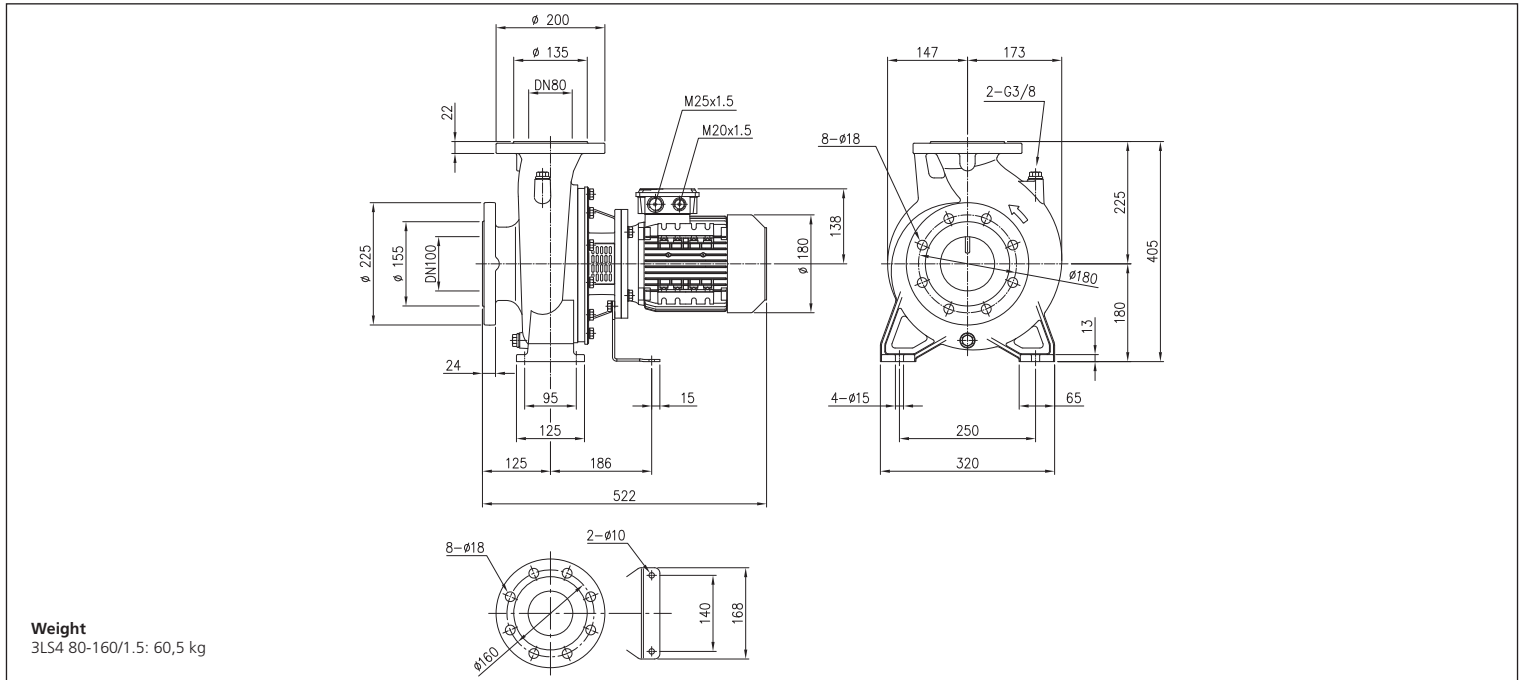


3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS4 65-250, 80 - up to 7.5 kW

4 Poles

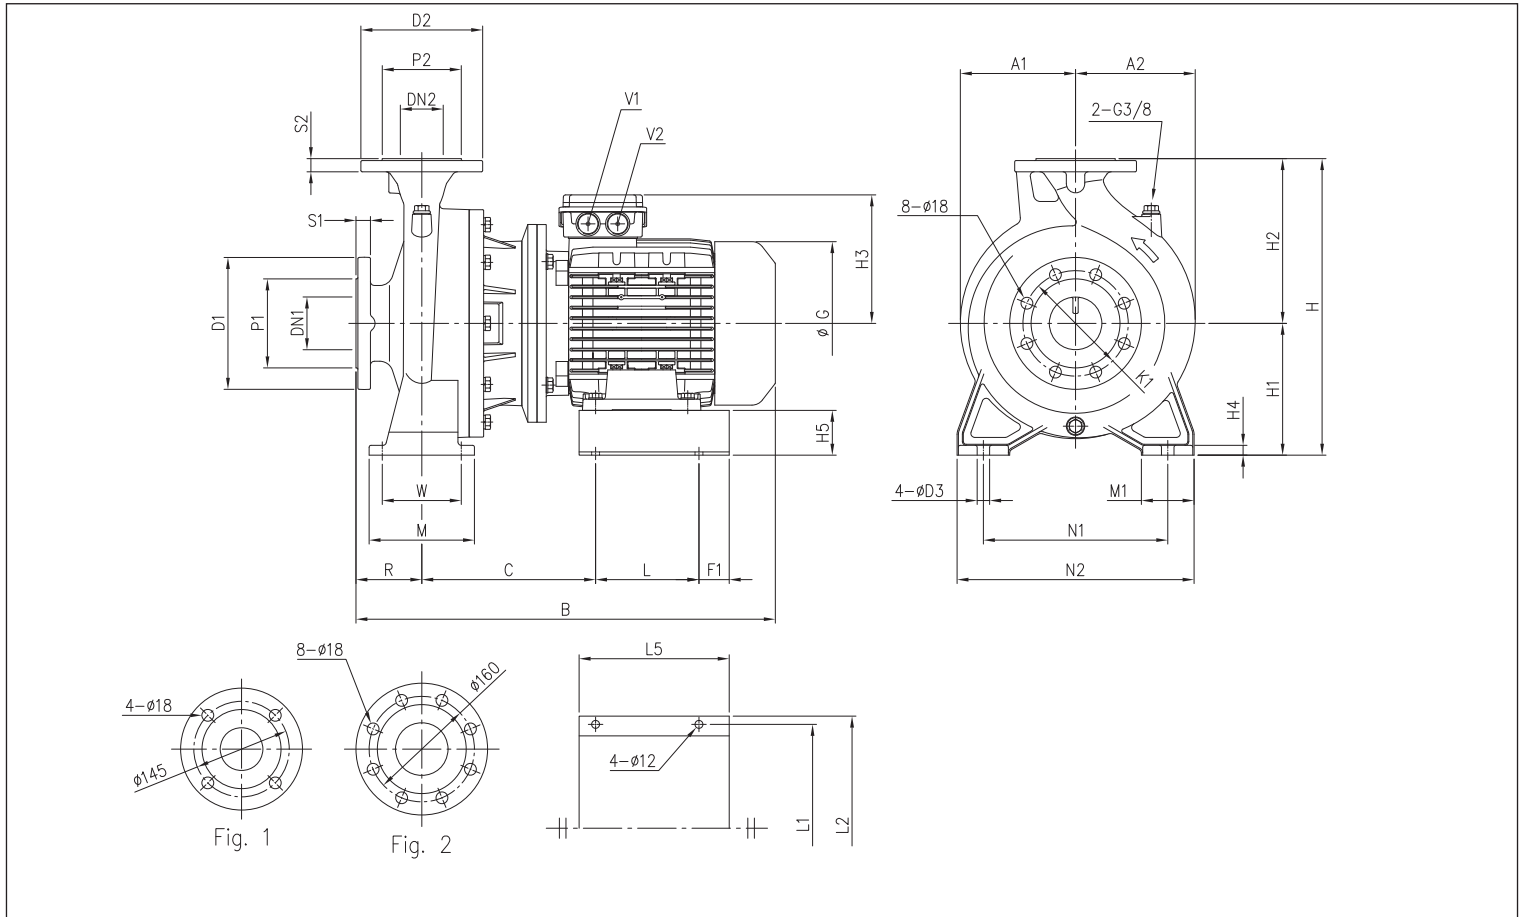

DIMENSIONS TABLE


Model	Dimensions [mm]																							Weight [kg]												
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	H5	R	W	N1	N2	M	M1	L	L1		L2	L5	A1	A2	B	C	F1	G	D3	V1	V2	
65-250/4	80	135	160	200	22	65	Fig. 1	120	185	20	450	200	250	161	15	88	100	120	280	360	160	80	147	265	290	187	175	182	580	215	20	225	19	M25x1,5	M20x1,5	86,0
65-250/5.5	80	135	160	200	22	65	Fig. 1	120	185	20	450	200	250	195	15	68	100	120	280	360	160	80	157	315	340	228	175	182	637	264	46	248	19	M32x1,5	M32x1,5	99,5
80-160/2.2R	100	155	180	225	24	80	Fig. 2	135	200	22	405	180	225	145	13	80	125	95	250	320	125	65	140	250	275	190	147	173	573	205	25	196	15	M25x1,5	M20x1,5	69,7
80-160/2.2	100	155	180	225	24	80	Fig. 2	135	200	22	405	180	225	145	13	80	125	95	250	320	125	65	140	250	275	190	147	173	573	205	25	196	15	M25x1,5	M20x1,5	70,0
80-200/3	100	155	180	225	24	80	Fig. 2	135	200	22	430	180	250	145	13	80	125	95	280	345	125	65	140	250	275	190	175	182	583	215	25	196	15	M25x1,5	M20x1,5	81,5
80-200/4R	100	155	180	225	24	80	Fig. 2	135	200	22	430	180	250	161	13	68	125	95	280	345	125	65	157	315	340	228	175	182	605	198	46	225	15	M25x1,5	M20x1,5	89,5
80-200/4	100	155	180	225	24	80	Fig. 2	135	200	22	430	180	250	161	13	68	125	95	280	345	125	65	157	315	340	228	175	182	605	198	46	225	15	M25x1,5	M20x1,5	90,0
80-250/5.5R	100	155	180	225	24	80	Fig. 2	135	200	22	480	200	280	195	15	68	125	120	315	400	160	80	157	315	340	228	175	192	662	264	46	248	19	M32x1,5	M32x1,5	104,0
80-250/5.5	100	155	180	225	24	80	Fig. 2	135	200	22	480	200	280	195	15	68	125	120	315	400	160	80	157	315	340	228	175	192	662	264	46	248	19	M32x1,5	M32x1,5	104,5
80-250/7.5	100	155	180	225	24	80	Fig. 2	135	200	22	480	200	280	195	15	68	125	120	315	400	160	80	157	315	340	228	175	192	702	264	46	248	19	M32x1,5	M32x1,5	109,5

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)P4 32, 40, 50, 65 - up to 65-200

4 Poles

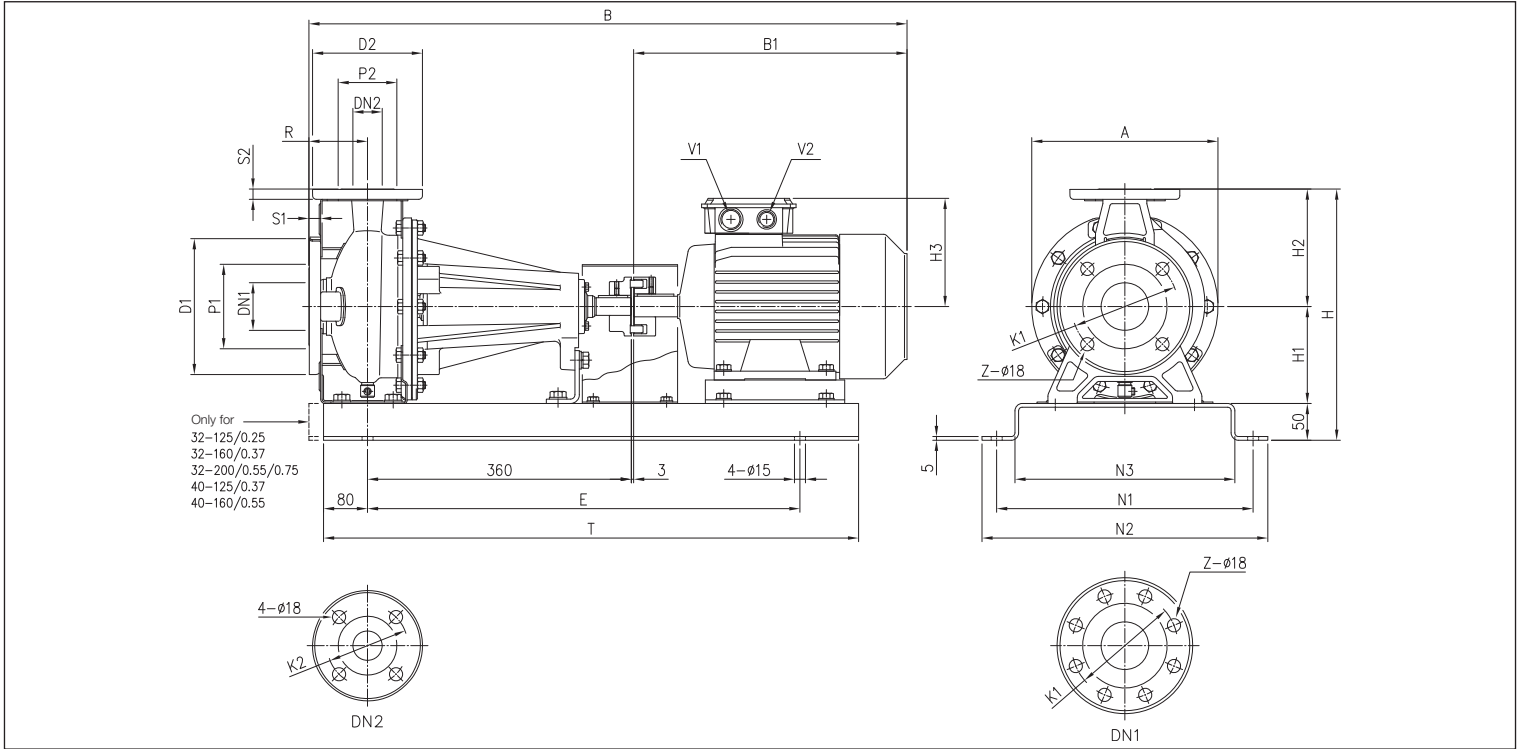

DIMENSIONS TABLE

Model	Dimensions [mm]																				Weight [kg]							
	Ø DN1	Ø P1	Ø K1	Ø D1	S1	Z [1]	Z [2]	Ø DN2	Ø P2	Ø K2	Ø D2	S2	H	H1	H2	H3	R	A	B	B1		E	N1	N2	N3	T	V1	V2
32-125/0.25	50	95	125	165	16	4	-	32	75	100	140	14	302	112	140	112	80	213	688	245	550	300	340	250	710	M20x1,5	M16x1,5	37,0
32-160/0.37R	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	112	80	254	688	245	510	350	390	300	670	M20x1,5	M16x1,5	41,0
32-160/0.37	50	95	125	165	16	4	-	32	75	100	140	14	342	132	160	112	80	254	688	245	510	350	390	300	670	M20x1,5	M16x1,5	41,0
32-200/0.55R	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	129	80	296	715	272	510	350	390	300	670	M25x1,5	M20x1,5	53,5
32-200/0.55	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	129	80	296	715	272	510	350	390	300	670	M25x1,5	M20x1,5	53,5
32-200/0.75	50	95	125	165	16	4	-	32	75	100	140	14	390	160	180	129	80	296	715	272	510	350	390	300	670	M25x1,5	M20x1,5	54,5
40-125/0.37R	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	112	80	213	688	245	550	300	340	250	710	M20x1,5	M16x1,5	46,5
40-125/0.37	65	115	145	185	16	4	-	40	80	110	150	14	302	112	140	112	80	213	688	245	550	300	340	250	710	M20x1,5	M16x1,5	46,5
40-160/0.55R	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	129	80	254	715	272	510	350	390	300	670	M25x1,5	M20x1,5	44,5
40-160/0.55	65	115	145	185	16	4	-	40	80	110	150	14	342	132	160	129	80	254	715	272	510	350	390	300	670	M25x1,5	M20x1,5	44,5
40-200/1.1R	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	61,5
40-200/1.1	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	61,5
40-200/1.5	65	115	145	185	16	4	-	40	80	110	150	14	390	160	180	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	64,0
50-125/0.55R	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	129	100	254	735	272	510	350	390	300	670	M25x1,5	M20x1,5	45,0
50-125/0.55	65	115	145	185	16	4	-	50	95	125	165	16	342	132	160	129	100	254	735	272	510	350	390	300	670	M25x1,5	M20x1,5	45,0
50-160/1.1R	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	52,5
50-160/1.1	65	115	145	185	16	4	-	50	95	125	165	16	390	160	180	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	52,5
50-200/1.5R	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	64,0
50-200/1.5	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	64,0
50-200/2.2	65	115	145	185	16	4	-	50	95	125	165	16	410	160	200	145	100	296	829	366	590	350	390	300	750	M25x1,5	M20x1,5	70,0
65-125/0.55	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	129	100	254	735	272	510	350	390	300	670	M25x1,5	M20x1,5	48,5
65-125/0.75	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	129	100	254	735	272	510	350	390	300	670	M25x1,5	M20x1,5	48,5
65-125/1.1	80	134	160	200	18	8	4	65	115	145	185	16	390	160	180	138	100	254	780	317	590	350	390	300	750	M25x1,5	M20x1,5	56,0
65-160/1.1	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	62,5
65-160/1.5	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	138	100	296	780	317	590	350	390	300	750	M25x1,5	M20x1,5	63,5
65-160/2.2	80	134	160	200	18	8	4	65	115	145	185	16	410	160	200	145	100	296	829	366	590	350	390	300	750	M25x1,5	M20x1,5	71,5
65-200/2.2R	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	145	100	296	829	366	590	380	420	330	750	M25x1,5	M20x1,5	74,0
65-200/2.2	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	145	100	296	829	366	590	380	420	330	750	M25x1,5	M20x1,5	74,0
65-200/3	80	134	160	200	18	8	4	65	115	145	185	16	455	180	225	145	100	296	829	366	590	380	420	330	750	M25x1,5	M20x1,5	77,5


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LP4 65-250, 80

4 Poles

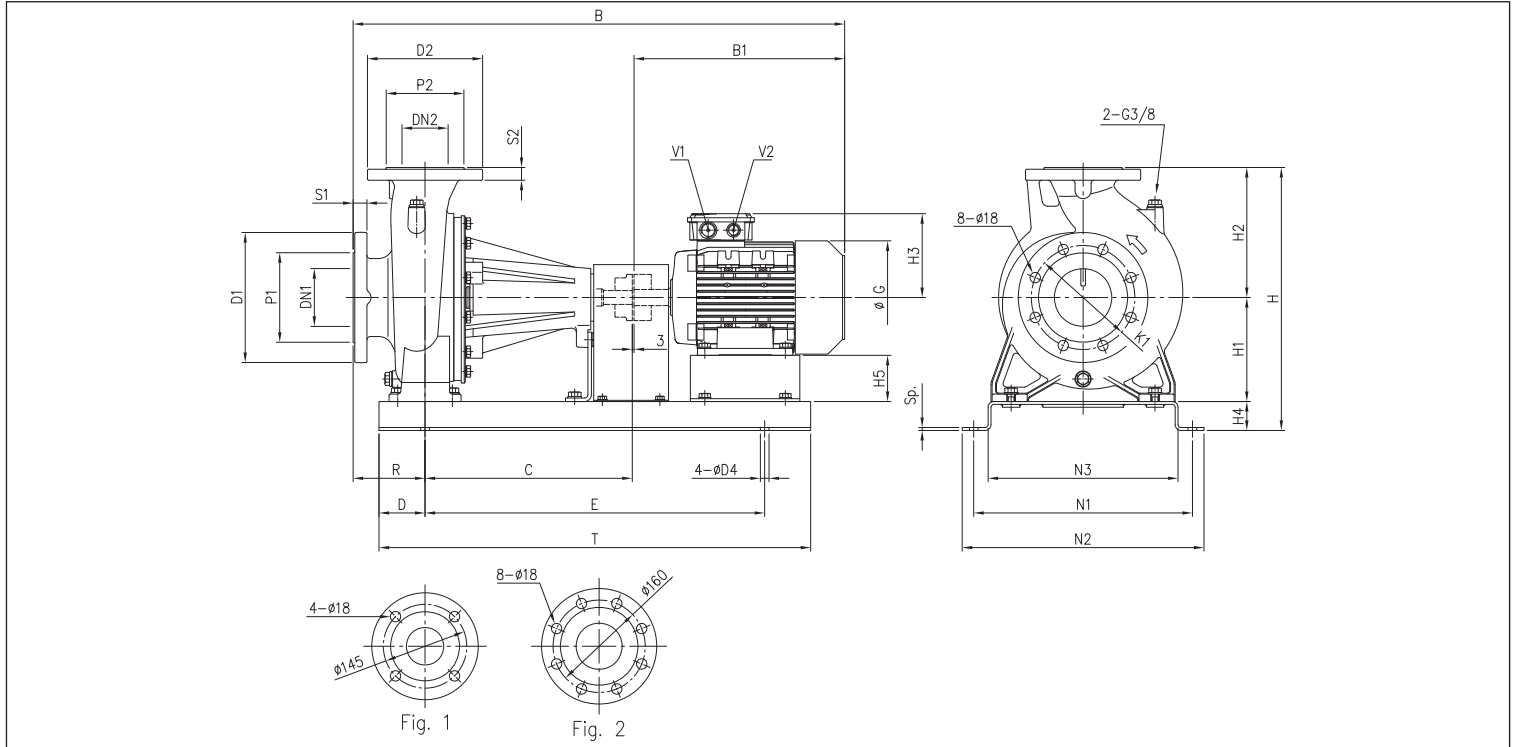

DIMENSIONS TABLE


Model	Dimensions [mm]																								Weight [kg]					
	DN1	P1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	H4	H5	R	N1	N2	N3	B	B1	C	D	G	E		T	D4	Sp.	V1	V2
65-250/4	80	135	200	22	65	120	185	20	510	200	250	161	60	88	100	510	570	440	961	388	470	100	225	760	960	19	8	M25x1,5	M20x1,5	113,5
65-250/5.5	80	135	200	22	65	120	185	20	510	200	250	195	60	68	100	510	570	440	1015	442	470	100	248	760	960	19	8	M32x1,5	M32x1,5	130,0
80-160/1.5	100	155	225	24	80	135	200	22	455	180	225	138	50	90	125	380	420	330	805	317	360	80	180	590	750	15	5	M25x1,5	M20x1,5	80,0
80-160/2.2R	100	155	225	24	80	135	200	22	455	180	225	145	50	80	125	380	420	330	854	366	360	80	196	590	750	15	5	M25x1,5	M20x1,5	86,0
80-160/2.2	100	155	225	24	80	135	200	22	455	180	225	145	50	80	125	380	420	330	854	366	360	80	196	590	750	15	5	M25x1,5	M20x1,5	100,5
80-200/3	100	155	225	24	80	135	200	22	490	180	250	145	60	80	125	460	520	390	964	366	470	100	196	700	900	19	8	M25x1,5	M20x1,5	109,5
80-200/4R	100	155	225	24	80	135	200	22	490	180	250	161	60	68	125	460	520	390	986	388	470	100	225	700	900	19	8	M25x1,5	M20x1,5	116,5
80-200/4	100	155	225	24	80	135	200	22	490	180	250	161	60	68	125	460	520	390	986	388	470	100	225	700	900	19	8	M25x1,5	M20x1,5	117,0
80-250/5.5R	100	155	225	24	80	135	200	22	540	200	280	195	60	68	125	510	570	440	1040	442	470	100	248	760	960	19	8	M32x1,5	M32x1,5	134,0
80-250/5.5	100	155	225	24	80	135	200	22	540	200	280	195	60	68	125	510	570	440	1040	442	470	100	248	760	960	19	8	M32x1,5	M32x1,5	134,5
80-250/7.5	100	155	225	24	80	135	200	22	540	200	280	195	60	68	125	510	570	440	1080	482	470	100	248	760	960	19	8	M32x1,5	M32x1,5	143,5

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)SF4 32, 40, 50, 65 - up to 1.5 kW

4 Poles

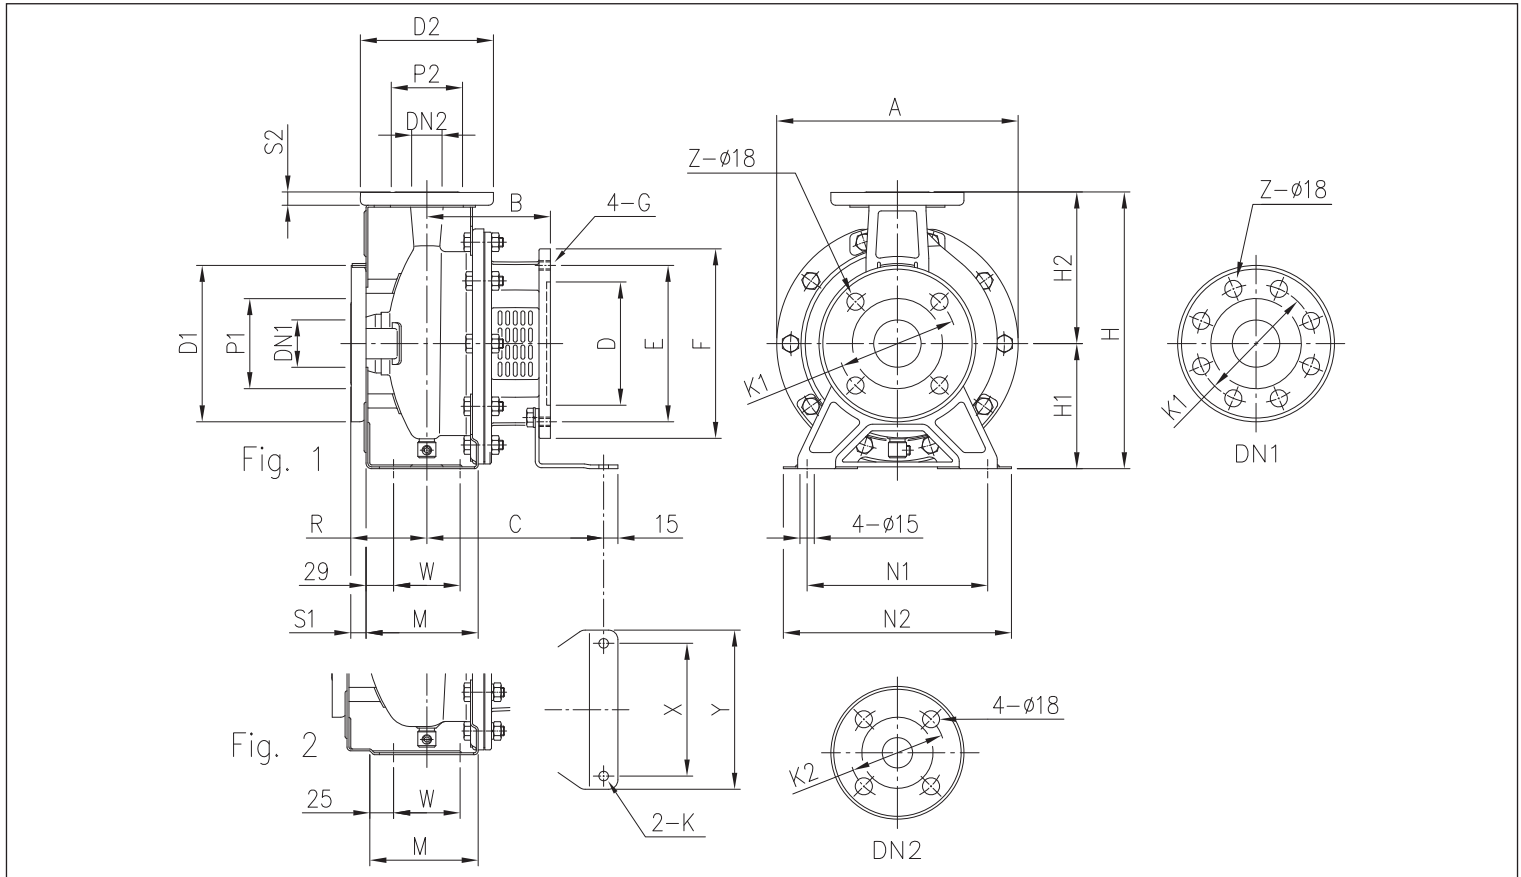

DIMENSIONS TABLE

Model	Fig.	Dimensions [mm]																												Weight [kg]		
		DN1	P1	K1	D1	S1	Z	[1]	[2]	DN2	P2	K2	D2	S2	H	H1	H2	M	N1	N2	R	W	A	B	C	D	E	F	G		X	Y
32-125/0.25	1	50	95	125	165	16	4	-	32	75	100	140	14	252	112	140	114	140	190	80	70	213	108	153	110	130	160	M8	112	140	8	15,0
32-160/0.37R	1	50	95	125	165	16	4	-	32	75	100	140	14	292	132	160	118	190	240	80	70	254	108	153	110	130	160	M8	112	140	8	19,5
32-160/0.37	1	50	95	125	165	16	4	-	32	75	100	140	14	292	132	160	118	190	240	80	70	254	108	153	110	130	160	M8	112	140	8	19,5
32-200/0.55R	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	118	174	130	165	200	M10	140	168	10	24,0
32-200/0.55	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	118	174	130	165	200	M10	140	168	10	24,0
32-200/0.75	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	118	174	130	165	200	M10	140	168	10	24,0
40-125/0.37R	1	65	115	145	185	16	4	-	40	80	110	150	14	252	112	140	114	160	210	80	70	213	108	153	110	130	160	M8	112	140	8	16,5
40-125/0.37	1	65	115	145	185	16	4	-	40	80	110	150	14	252	112	140	114	160	210	80	70	213	108	153	110	130	160	M8	112	140	8	16,5
40-160/0.55R	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	118	174	130	165	200	M10	140	168	10	20,0
40-160/0.55	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	118	174	130	165	200	M10	140	168	10	20,0
40-200/1.1R	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	27,0
40-200/1.1	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	27,0
40-200/1.5	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	27,0
50-125/0.55R	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	118	174	130	165	200	M10	140	168	10	21,0
50-125/0.55	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	118	174	130	165	200	M10	140	168	10	21,0
50-160/1.1R	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	26,0
50-160/1.1	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	26,0
50-200/1.5R	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	29,5
50-200/1.5	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	130	186	130	165	200	M10	140	168	10	29,5
65-125/0.55	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	118	174	130	165	200	M10	140	168	10	26,0
65-125/0.75	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	118	174	130	165	200	M10	140	168	10	27,5
65-125/1.1	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	130	186	130	165	200	M10	140	168	10	28,5
65-160/1.1	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	130	186	130	165	200	M10	140	168	10	29,5
65-160/1.5	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	130	186	130	165	200	M10	140	168	10	30,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)SF4 50, 65 - up to 3 kW

4 Poles

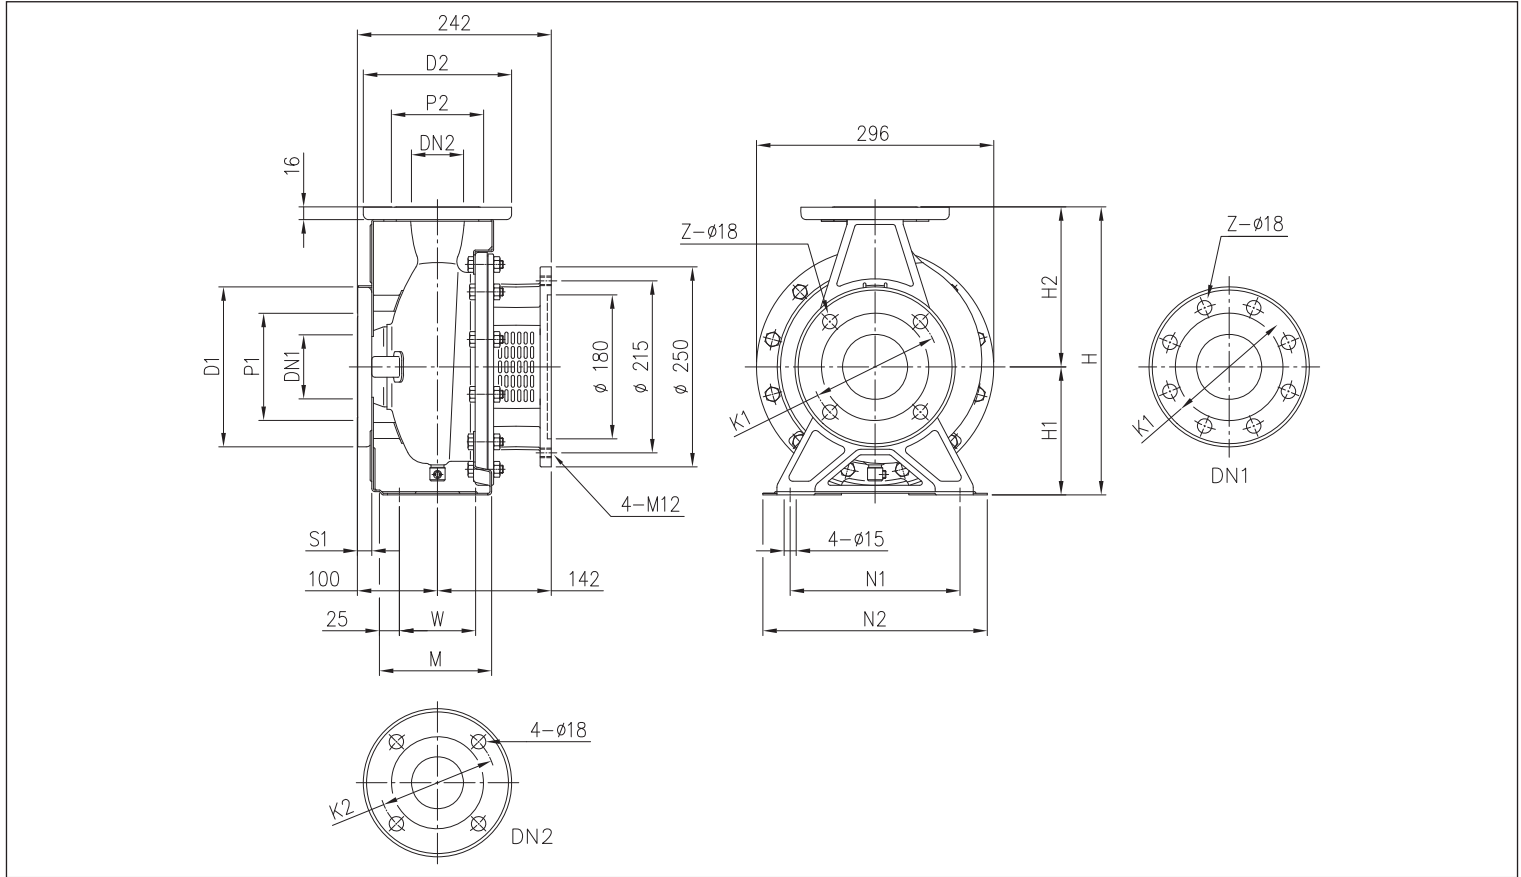

DIMENSIONS TABLE

Model	Dimensions [mm]																			Weight [kg]
	DN1	P1	K1	D1	S1	[1]	Z	[2]	DN2	P2	K2	D2	H	H1	H2	M	N1	N2	W	
50-200/2.2	65	115	145	185	16	4	-		50	95	125	165	360	160	200	115	212	265	70	29,5
65-160/2.2	80	134	160	200	18	8	4		65	115	145	185	360	160	200	140	212	280	95	30,0
65-200/2.2R	80	134	160	200	18	8	4		65	115	145	185	405	180	225	140	250	320	95	29,5
65-200/2.2	80	134	160	200	18	8	4		65	115	145	185	405	180	225	140	250	320	95	29,5
65-200/3	80	134	160	200	18	8	4		65	115	145	185	405	180	225	140	250	320	95	30,0


[1] Standard
[2] On request

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LSF4 80-160/1.5 kW


4 Poles

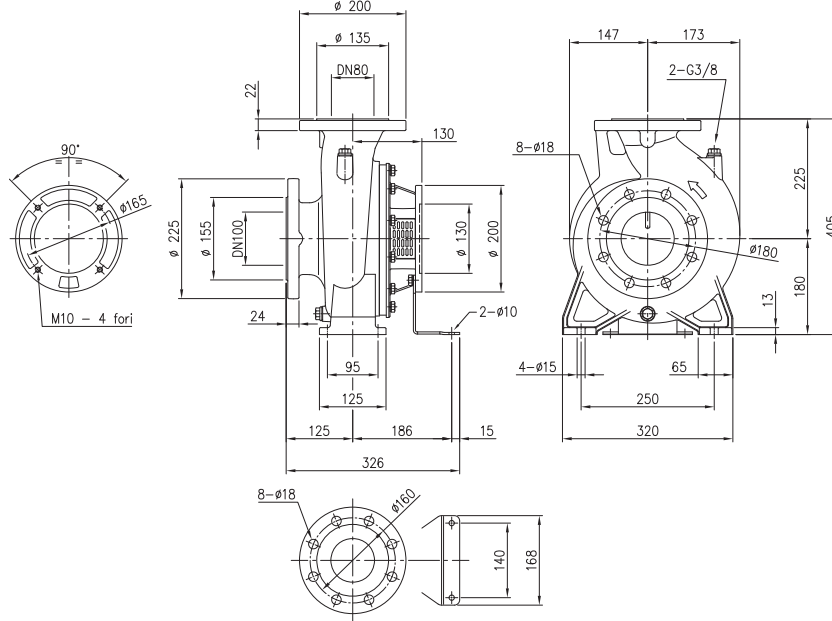

Weight
3LSF4 80-160/1.5: 50,2 kg

3LSF4 65-250, 80 - up to 7.5 kW

4 Poles

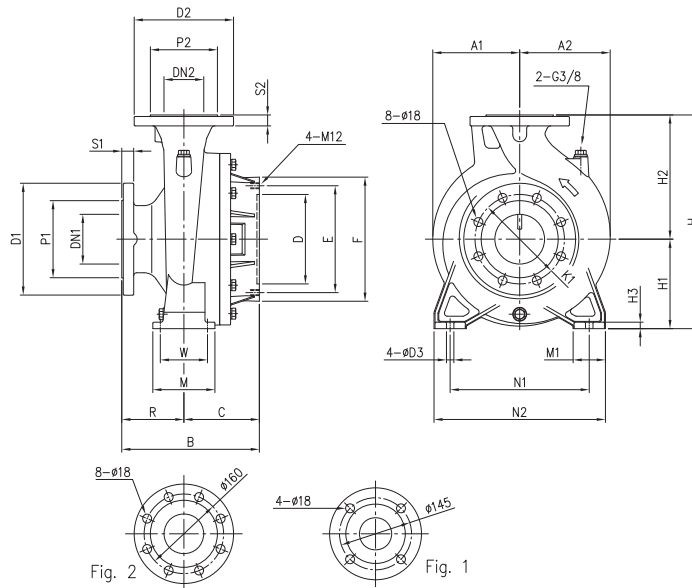

DIMENSIONS TABLE


Model	Dimensions [mm]																				Weight [kg]							
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	R	W	N1	N2	M	M1	D3		B	C	D	E	F	A1	A2
65-250/4	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	19	252	152	180	215	250	175	182	56,5
65-250/5.5	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	19	252	152	230	265	300	175	182	53,5
80-160/2.2R	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	267	142	180	215	250	147	173	50,5
80-160/2.2	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	15	267	142	180	215	250	147	173	50,5
80-200/3	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	277	152	180	215	250	175	182	59,0
80-200/4R	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	277	152	180	215	250	175	182	60,5
80-200/4	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	15	277	152	180	215	250	175	182	60,5
80-250/5.5R	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	300	175	230	265	300	175	192	58,0
80-250/5.5	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	300	175	230	265	300	175	192	58,0
80-250/7.5	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	19	300	175	230	265	300	175	192	59,0

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)PF4 32, 40, 50, 65

4 Poles

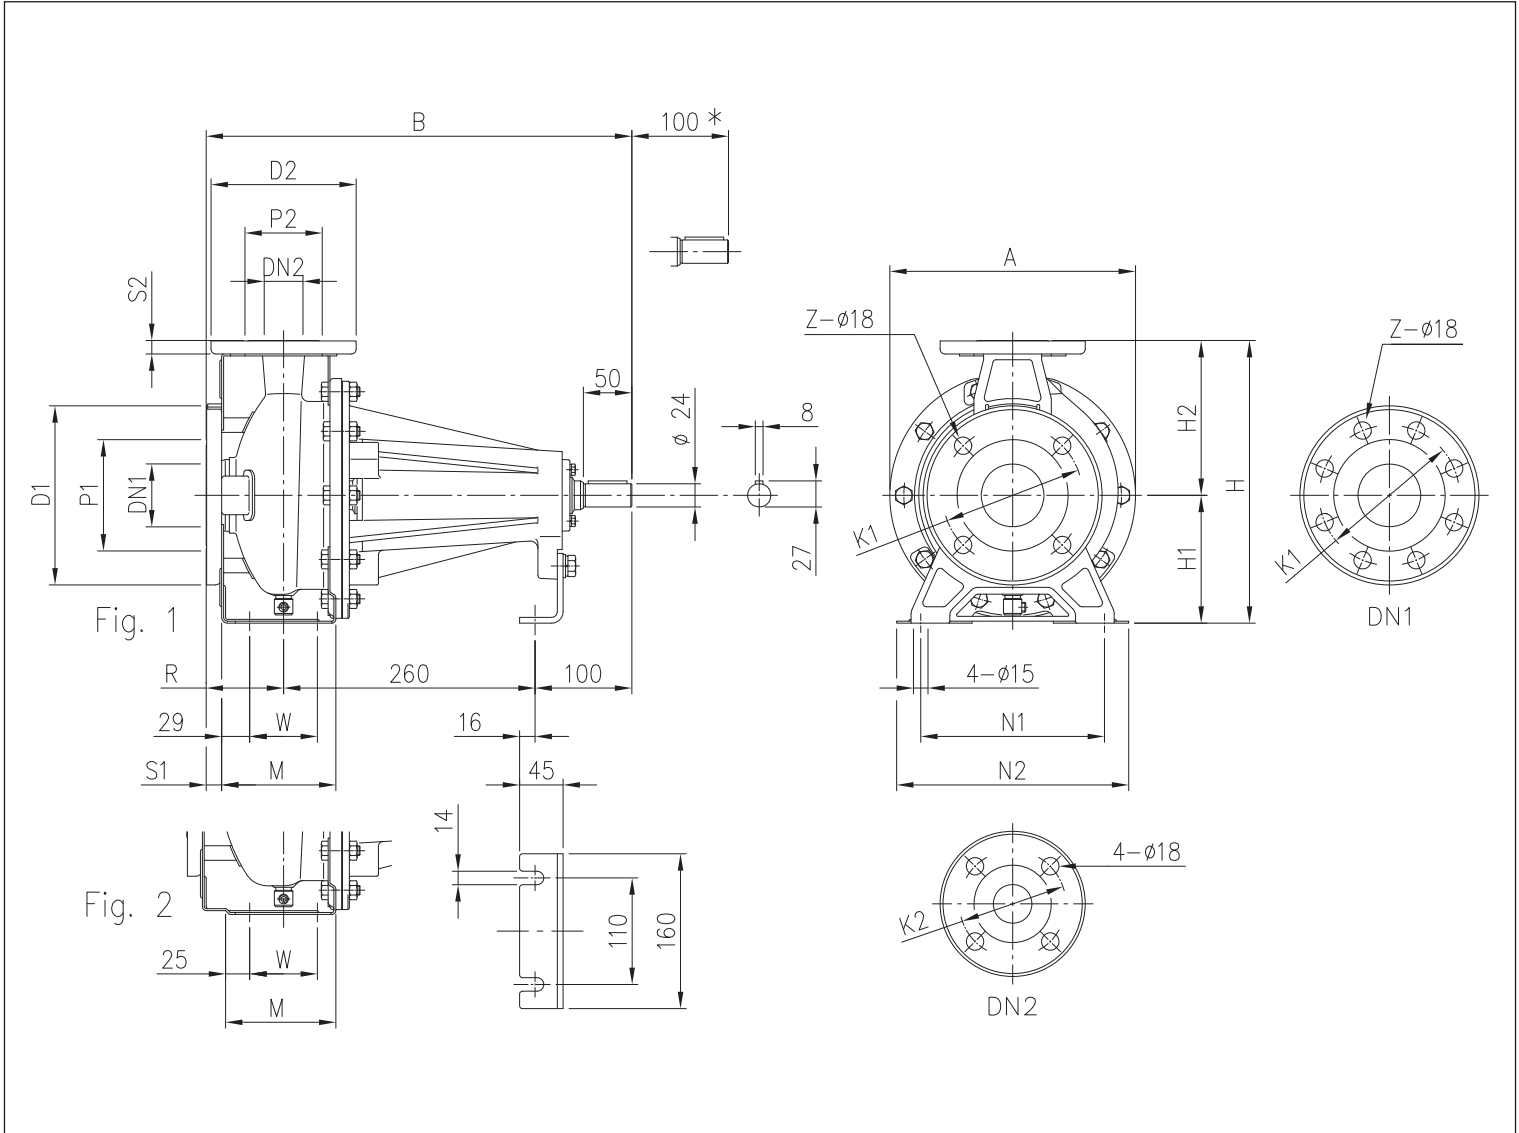

DIMENSIONS TABLE

Model	Fig.	Dimensions [mm]																							Weight [kg]
		DN1	P1	K1	D1	S1	[1]	Z	[2]	DN2	P2	K2	D2	S2	H	H1	H2	M	N1	N2	R	W	A	B	
32-125	1	50	95	125	165	16	4	-	32	75	100	140	14	252	112	140	114	140	190	80	70	213	440	17,0	
32-160	1	50	95	125	165	16	4	-	32	75	100	140	14	292	132	160	118	190	240	80	70	254	440	19,0	
32-200	1	50	95	125	165	16	4	-	32	75	100	140	14	340	160	180	119	190	240	80	70	296	440	27,0	
40-125	1	65	115	145	185	16	4	-	40	80	110	150	14	252	112	140	114	160	210	80	70	213	440	17,0	
40-160	1	65	115	145	185	16	4	-	40	80	110	150	14	292	132	160	118	190	240	80	70	254	440	19,0	
40-200	2	65	115	145	185	16	4	-	40	80	110	150	14	340	160	180	115	212	265	100	70	296	460	27,0	
50-125	2	65	115	145	185	16	4	-	50	95	125	165	16	292	132	160	114	190	240	100	70	254	460	19,0	
50-160	2	65	115	145	185	16	4	-	50	95	125	165	16	340	160	180	115	212	265	100	70	296	460	28,0	
50-200	2	65	115	145	185	16	4	-	50	95	125	165	16	360	160	200	115	212	265	100	70	296	460	27,0	
65-125	2	80	134	160	200	18	8	4	65	115	145	185	16	340	160	180	140	212	280	100	95	254	460	28,0	
65-160	2	80	134	160	200	18	8	4	65	115	145	185	16	360	160	200	140	212	280	100	95	296	460	29,0	
65-200	2	80	134	160	200	18	8	4	65	115	145	185	16	405	180	225	140	250	320	100	95	296	460	30,0	

[1] Standard
[2] On request


* Space where it is possible to disassemble the pump with spacer joint without disassembling the motor.

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LPF4 65-250, 80

4 Poles

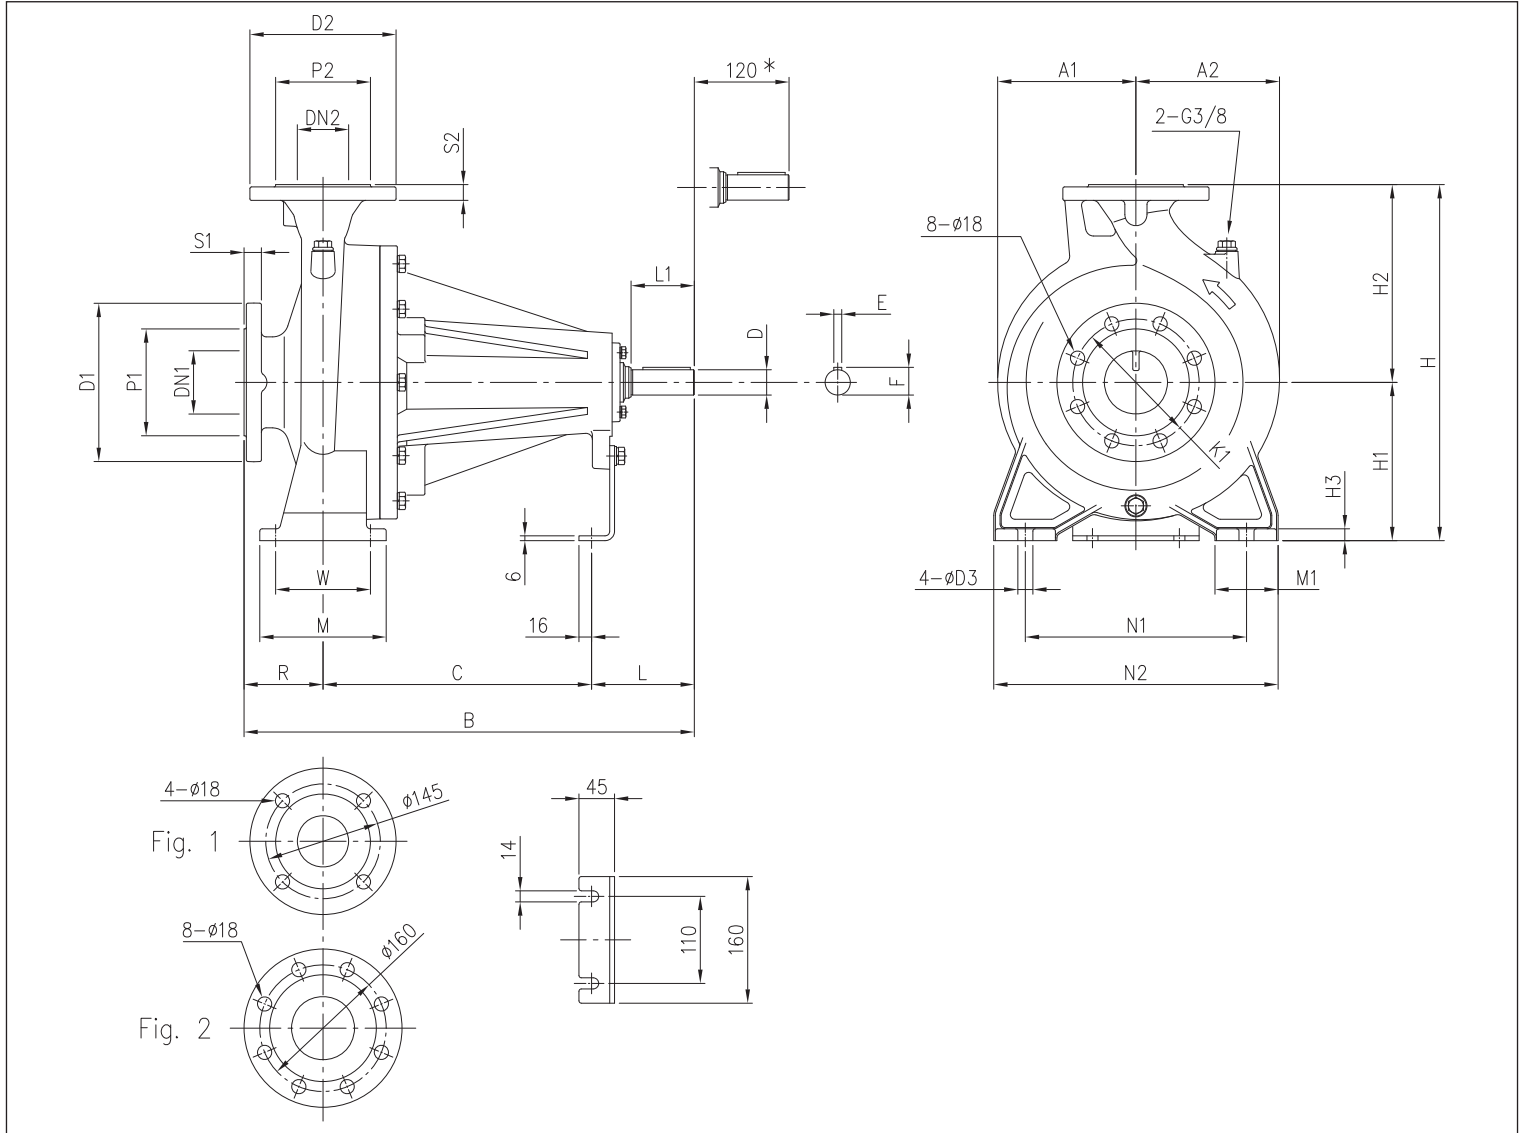

DIMENSIONS TABLE

Model	Dimensions [mm]																												Weight [kg]	
	DN1	P1	K1	D1	S1	DN2	P2	D2	S2	H	H1	H2	H3	R	W	N1	N2	M	M1	L	L1	D	D3	E	F	A1	A2	B		C
65-250	80	135	160	200	22	65 Fig. 1	120	185	20	450	200	250	15	100	120	280	360	160	80	130	80	32	19	10	35	175	182	570	340	82,0
80-160	100	155	180	225	24	80 Fig. 2	135	200	22	405	180	225	13	125	95	250	320	125	65	100	50	24	15	8	27	147	173	485	260	56,0
80-200	100	155	180	225	24	80 Fig. 2	135	200	22	430	180	250	13	125	95	280	345	125	65	130	80	32	15	10	35	175	182	595	340	83,0
80-250	100	155	180	225	24	80 Fig. 2	135	200	22	480	200	280	15	125	120	315	400	160	80	130	80	32	19	10	35	175	192	595	340	84,0


* Space where it is possible to disassemble the pump with spacer joint without disassembling the motor.

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

Joint for 3(L)S4 - 3SF4 Series

4 Poles

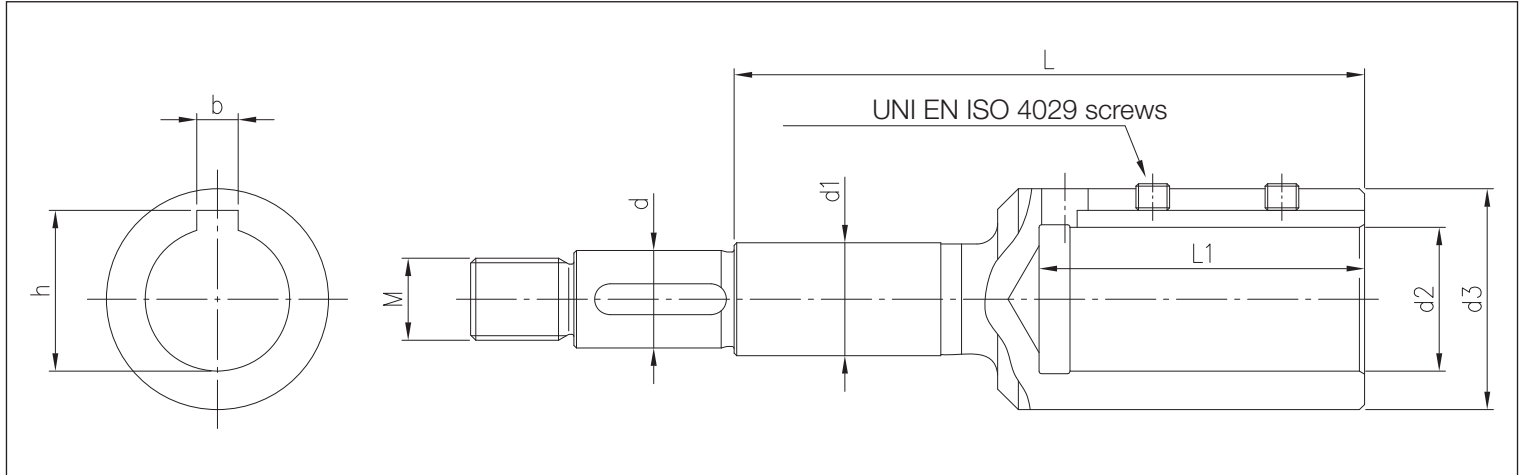

DIMENSIONS TABLE


Model	[HP]	[kW]	Motor size	Dimensions [mm]									
				d	d1	d2	d3	M	L	L1	b	h	Screws
32-125/0.25	0,33	0,25	71	19	22	14	28	M16x1,5	88	33	5	16,3	M5x6
32-160/0.37R	0,5	0,37	71	19	22	14	28	M16x1,5	88	33	5	16,3	M5x6
32-160/0.37	0,5	0,37	71	19	22	14	28	M16x1,5	88	33	5	16,3	M5x6
32-200/0.55R	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
32-200/0.55	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
32-200/0.75	1	0,75	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
40-125/0.37R	0,5	0,37	71	19	22	14	28	M16x1,5	88	33	5	16,3	M5x6
40-125/0.37	0,5	0,37	71	19	22	14	28	M16x1,5	88	33	5	16,3	M5x6
40-160/0.55R	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
40-160/0.55	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
40-200/1.1R	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
40-200/1.1	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
40-200/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-125/0.55R	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
50-125/0.55	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
50-160/1.1R	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-160/1.1	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-200/1.5R	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-200/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
50-200/2.2	3	2,2	100	22	22	28	43	M18x1,5	153	63	8	31,3	M8x8
65-125/0.55	0,75	0,55	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
65-125/0.75	1	0,75	80	19	22	19	33	M16x1,5	98	43	6	21,8	M6x6
65-125/1.1	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
65-160/1.1	1,5	1,1	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
65-160/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
65-160/2.2	3	2,2	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
65-200/2.2R	3	2,2	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
65-200/2.2	3	2,2	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
65-200/3	4	3	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
65-250/4	5,5	4	112	24	30	28	43	M20x1,5	128	63	8	31,3	M8x8
65-250/5.5	7,5	5,5	132	24	30	38	58	M20x1,5	151	84	10	41,3	M8x8
80-160/1.5	2	1,5	90	19	22	24	39	M16x1,5	110	53	8	27,3	M8x8
80-160/2.2R	3	2,2	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
80-160/2.2	3	2,2	100	19	22	28	43	M16x1,5	122	63	8	31,3	M8x8
80-200/3	4	3	100	24	30	28	43	M20x1,5	128	63	8	31,3	M8x8
80-200/4R	5,5	4	112	24	30	28	43	M20x1,5	128	63	8	31,3	M8x8
80-200/4	5,5	4	112	24	30	28	43	M20x1,5	128	63	8	31,3	M8x8
80-250/5.5R	7,5	5,5	132	24	30	38	58	M20x1,5	151	84	10	41,3	M8x8
80-250/5.5	7,5	5,5	132	24	30	38	58	M20x1,5	151	84	10	41,3	M8x8
80-250/7.5	10	7,5	132	24	30	38	58	M20x1,5	151	84	10	41,3	M8x8

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

Joint for 3(L)P4 Series

4 Poles

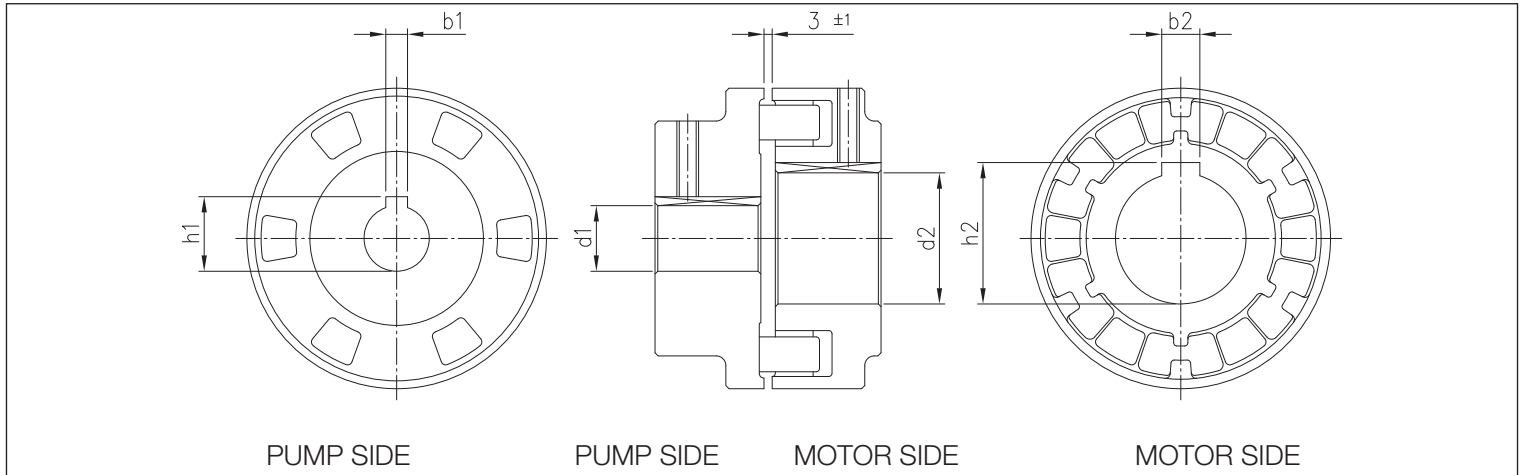

DIMENSIONS TABLE


Model	[HP]	[kW]	Motor size	Dimensions [mm]					
				d1	b1	h1	d2	b2	h2
32-125/0.25	0,33	0,25	71	24	8	27,3	14	5	16,3
32-160/0.37R	0,5	0,37	71	24	8	27,3	14	5	16,3
32-160/0.37	0,5	0,37	71	24	8	27,3	14	5	16,3
32-200/0.55R	0,75	0,55	80	24	8	27,3	19	6	21,8
32-200/0.55	0,75	0,55	80	24	8	27,3	19	6	21,8
32-200/0.75	1	0,75	80	24	8	27,3	19	6	21,8
40-125/0.37R	0,5	0,37	71	24	8	27,3	14	5	16,3
40-125/0.37	0,5	0,37	71	24	8	27,3	14	5	16,3
40-160/0.55R	0,75	0,55	80	24	8	27,3	19	6	21,8
40-160/0.55	0,75	0,55	80	24	8	27,3	19	6	21,8
40-200/1.1R	1,5	1,1	90	24	8	27,3	24	8	27,3
40-200/1.1	1,5	1,1	90	24	8	27,3	24	8	27,3
40-200/1.5	2	1,5	90	24	8	27,3	24	8	27,3
50-125/0.55R	0,75	0,55	80	24	8	27,3	19	6	21,8
50-125/0.55	0,75	0,55	80	24	8	27,3	19	6	21,8
50-160/1.1R	1,5	1,1	90	24	8	27,3	24	8	27,3
50-160/1.1	1,5	1,1	90	24	8	27,3	24	8	27,3
50-200/1.5R	2	1,5	90	24	8	27,3	24	8	27,3
50-200/1.5	2	1,5	90	24	8	27,3	24	8	27,3
50-200/2.2	3	2,2	100	24	8	27,3	28	8	31,3
65-125/0.55	0,75	0,55	80	24	8	27,3	19	6	21,8
65-125/0.75	1	0,75	80	24	8	27,3	19	6	21,8
65-125/1.1	1,5	1,1	90	24	8	27,3	24	8	27,3
65-160/1.1	1,5	1,1	90	24	8	27,3	24	8	27,3
65-160/1.5	2	1,5	90	24	8	27,3	24	8	27,3
65-160/2.2	3	2,2	100	24	8	27,3	28	8	31,3
65-200/2.2R	3	2,2	100	24	8	27,3	28	8	31,3
65-200/2.2	3	2,2	100	24	8	27,3	28	8	31,3
65-200/3	4	3	100	24	8	27,3	28	8	31,3
65-250/4	5,5	4	112	32	10	35,3	28	8	31,3
65-250/5.5	7,5	5,5	132	32	10	35,3	38	10	41,3
80-160/1.5	2	1,5	90	24	8	27,3	24	8	27,3
80-160/2.2R	3	2,2	100	24	8	27,3	28	8	31,3
80-160/2.2	3	2,2	100	24	8	27,3	28	8	31,3
80-200/3	4	3	100	32	10	35,3	28	8	31,3
80-200/4R	5,5	4	112	32	10	35,3	28	8	31,3
80-200/4	5,5	4	112	32	10	35,3	28	8	31,3
80-250/5.5R	7,5	5,5	132	32	10	35,3	38	10	41,3
80-250/5.5	7,5	5,5	132	32	10	35,3	38	10	41,3
80-250/7.5	10	7,5	132	32	10	35,3	38	10	41,3

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)M4 32, 40, 50, 65 SECTIONAL VIEW

4 Poles

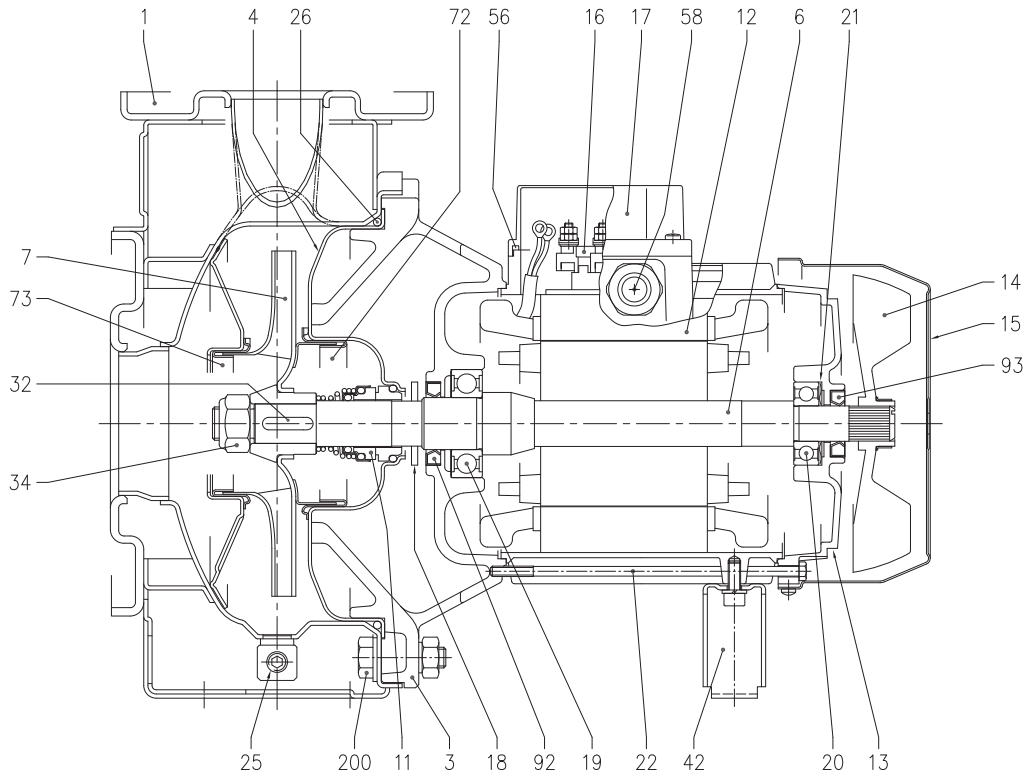

MATERIALS TABLE

Ref.	Name	Material	
		3M4	3LM4
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Rotor shaft (part in contact with the liquid)	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller 32, 40, 50 65-125/160/200	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
012	Motor case	-	
013	Motor cover	Aluminium	
014	Fan	Polyamide	
015	Fan cover	Galvanised steel Fe P04	
016	Terminal box	-	
017	Terminal box cover	Aluminium (three phase version)	
018	Spray protector washer	NBR	-
019	Bearing (pump side)	-	
020	Bearing (motor side)	-	
021	Adjusting ring	Steel C70	
022	Tie-rod	Galvanised steel Fe 42	
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Aluminium / Galvanised Steel	
056	Terminal box cover gasket	NBR	
058	Cable gland	-	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
092	Sealing ring	-	-
093	Sealing ring	-	-
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	


[1]= For 32-200, 40-200, 50-160, 50-200 versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LM4 80-160 SECTIONAL VIEW

4 Poles

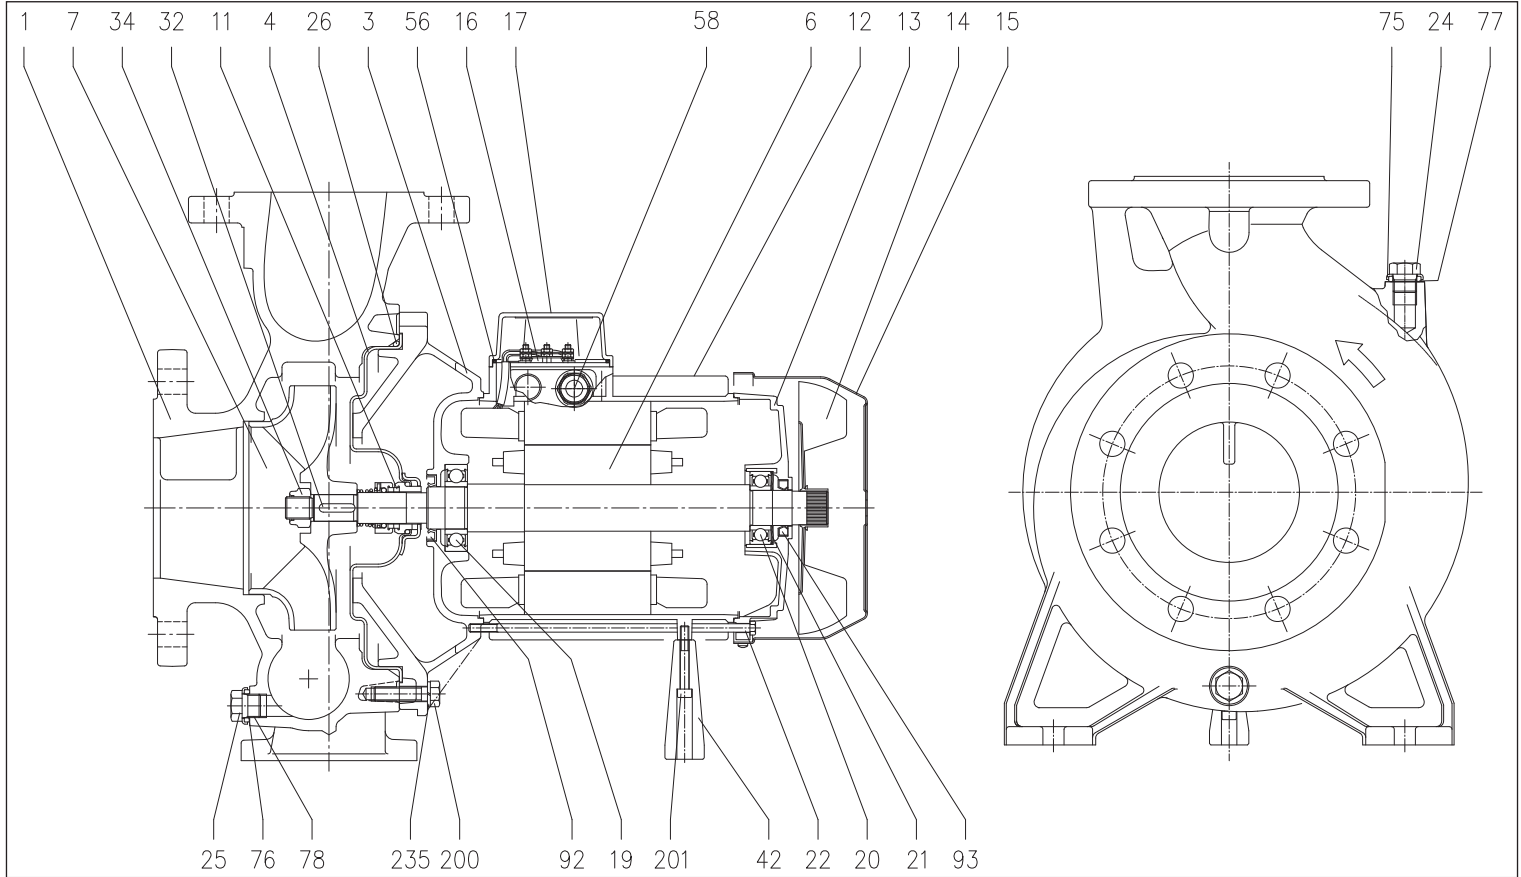

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	025	Drain plug	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	026	O-Ring	FPM
004	Seal housing disc	EN 1.4404 (AISI 316L)	032	Key	EN 1.4404 (AISI 316L)
006	Rotor shaft	EN 1.4404 (AISI 316L) Part in contact with the liquid	034	Impeller nut	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4401 (AISI 316)	042	Foot	Aluminium
011	Mechanical seal	SiC/SiC/FPM	056	Terminal box cover gasket	NBR
012	Motor case	-	058	Cable gland	-
013	Motor cover	Aluminium	075	Washer	EN 1.4404 (AISI 316L)
014	Fan	Polyamide	076	Washer	EN 1.4404 (AISI 316L)
015	Fan cover	Galvanised steel Fe P04	077	O-Ring	FPM
016	Terminal box	-	078	O-Ring	
017	Terminal box cover	Aluminium	092	Sealing ring	-
019	Bearing (pump side)	-	093	Sealing ring	-
020	Bearing (motor side)	-	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
021	Adjusting ring	Steel C70	201	Foot screw	Stainless steel A2-70 class ISO 3506/1
022	Tie-rod	Galvanised steel Fe 42	235	Washer	EN 1.4301 (AISI 304)
024	Filler cap	EN 1.4404 (AISI 316L)			

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LM4 65-250, 80 SECTIONAL VIEW

4 Poles

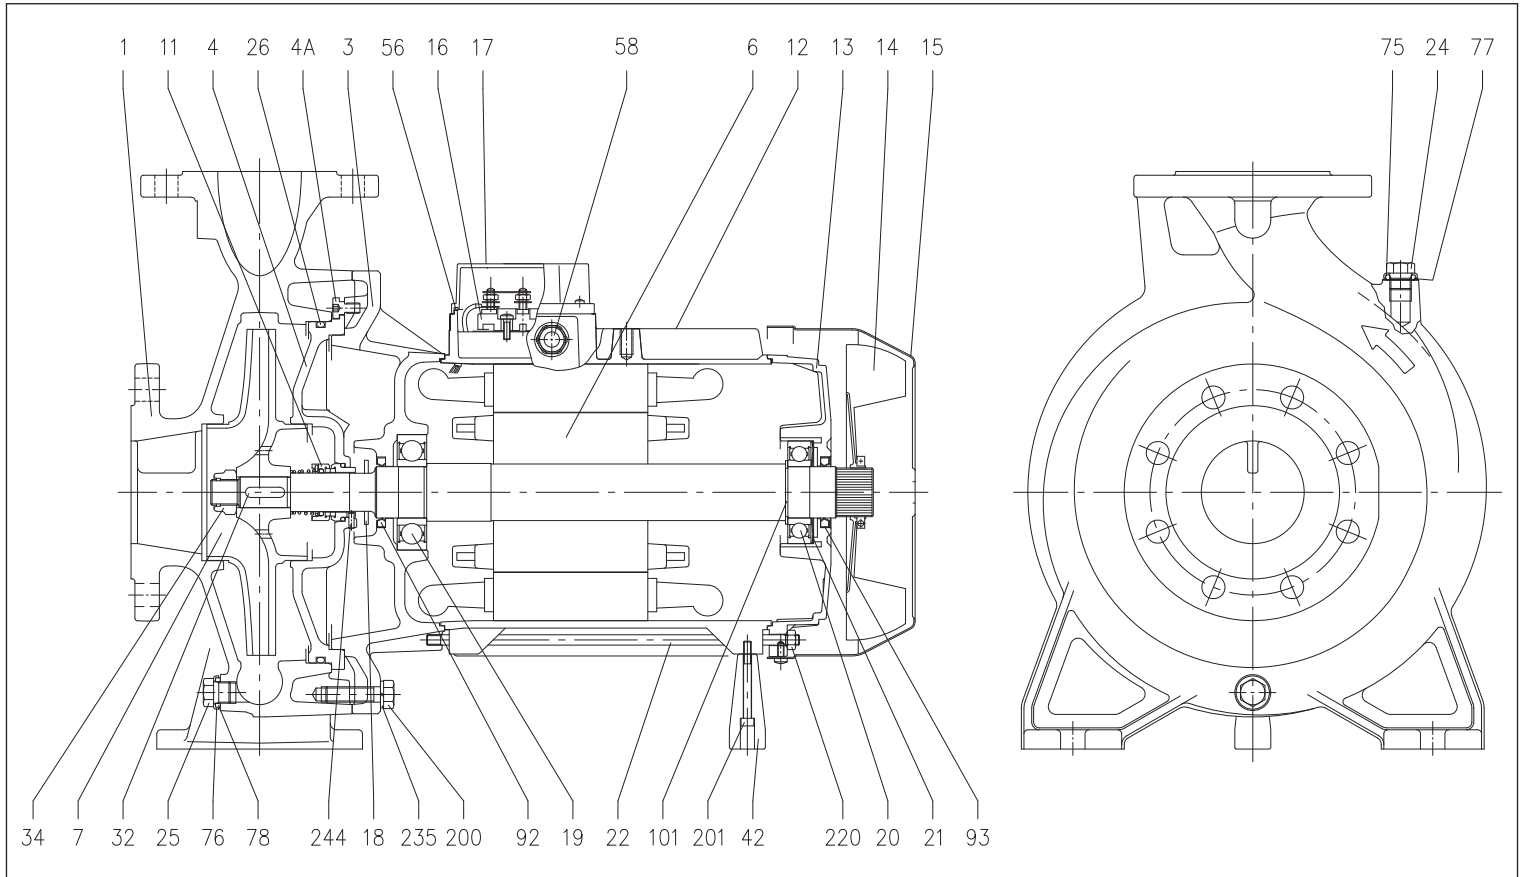

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	032	Key	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	Aluminium
004	Seal housing disc	EN 1.4401 (AISI 316)	042	Foot	Aluminium
004A	Screw for seal housing disc	EN 1.4301 (AISI 304)	056	Terminal box cover gasket	NBR
006	Rotor shaft	EN 1.4404 (AISI 316L) Part in contact with the liquid	058	Cable gland	-
007	Impeller	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SiC/SiC/FPM	076	Washer	
012	Motor case	-	077	O-Ring	
013	Motor cover	Aluminium	078	O-Ring	FPM
014	Fan	Polyamide	092	Sealing ring (3-4 kW, 5,5-7,5 kW)	-
015	Fan cover	Galvanised steel Fe P04			
016	Terminal box	-	093	Sealing ring (3 kW, 4 kW, 5,5-7,5 kW)	-
017	Terminal box cover	Aluminium			
018	Spray protector washer	NBR	101	Seeger ring (for 5.5-7.5 kW only)	Carbon steel TC 80
019	Bearing (pump side)	-			
020	Bearing (motor side)	-	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
021	Adjusting ring	Steel C70	201	Foot screw	Stainless steel A2-70 class ISO 3506/1
022	Tie-rod	Galvanised steel Fe 42	220	Nut for tie-rod	Galvanised Steel
024	Filler cap	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
025	Drain plug	EN 1.4404 (AISI 316L)	244	Plug [1]	EN 1.4301(AISI 304)
026	O-Ring	FPM			

[1]=Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)S4 32, 40, 50, 65 SECTIONAL VIEW

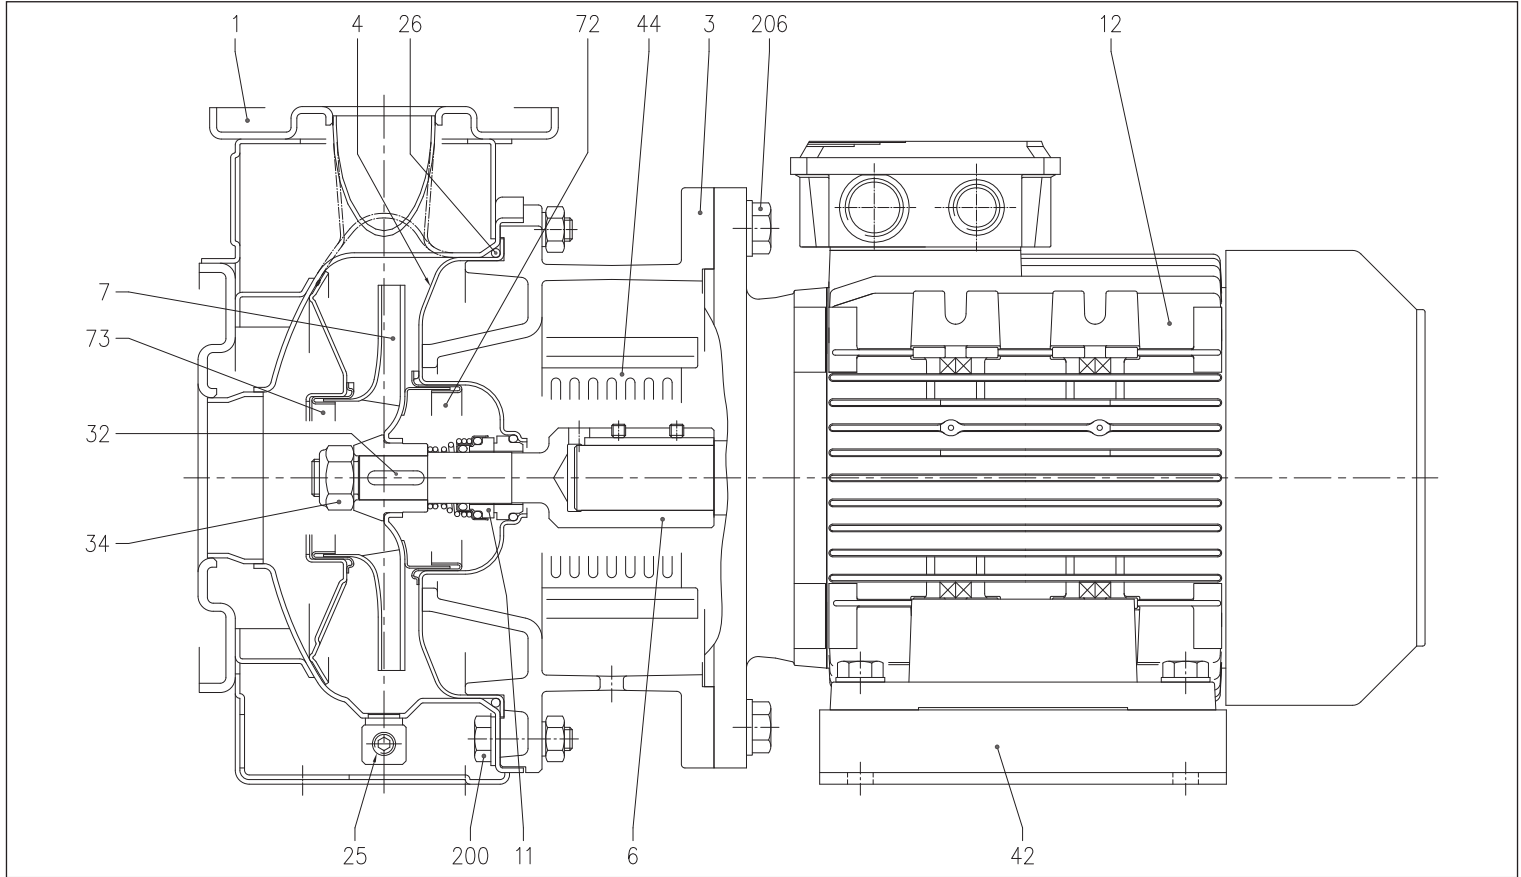

MATERIALS TABLE

Ref.	Name	Material	
		3S4	3LS4
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Joint - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	32, 40, 50		
	65-125/160/200		
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
012	Motor	-	
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	fino a 1 kW	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4401 (AISI 316)
042	Foot	EN 1.4301 (AISI 304)	
044	Support protection	Galvanised Steel EN 1.4301 (AISI 304)	
072	Wear ring [1]	not for the 65	EN 1.4301 (AISI 304)
073	Wear ring	not for the 65	EN 1.4404 (AISI 316L)
200	Screw (pump body)	EN 1.4301 (AISI 304)	
206	Screw	Stainless steel A270 class ISO 3506/1 Galvanised Steel	


[1]= For 32-200, 40-200, 50-160, 50-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS4 80-160 SECTIONAL VIEW

4 Poles

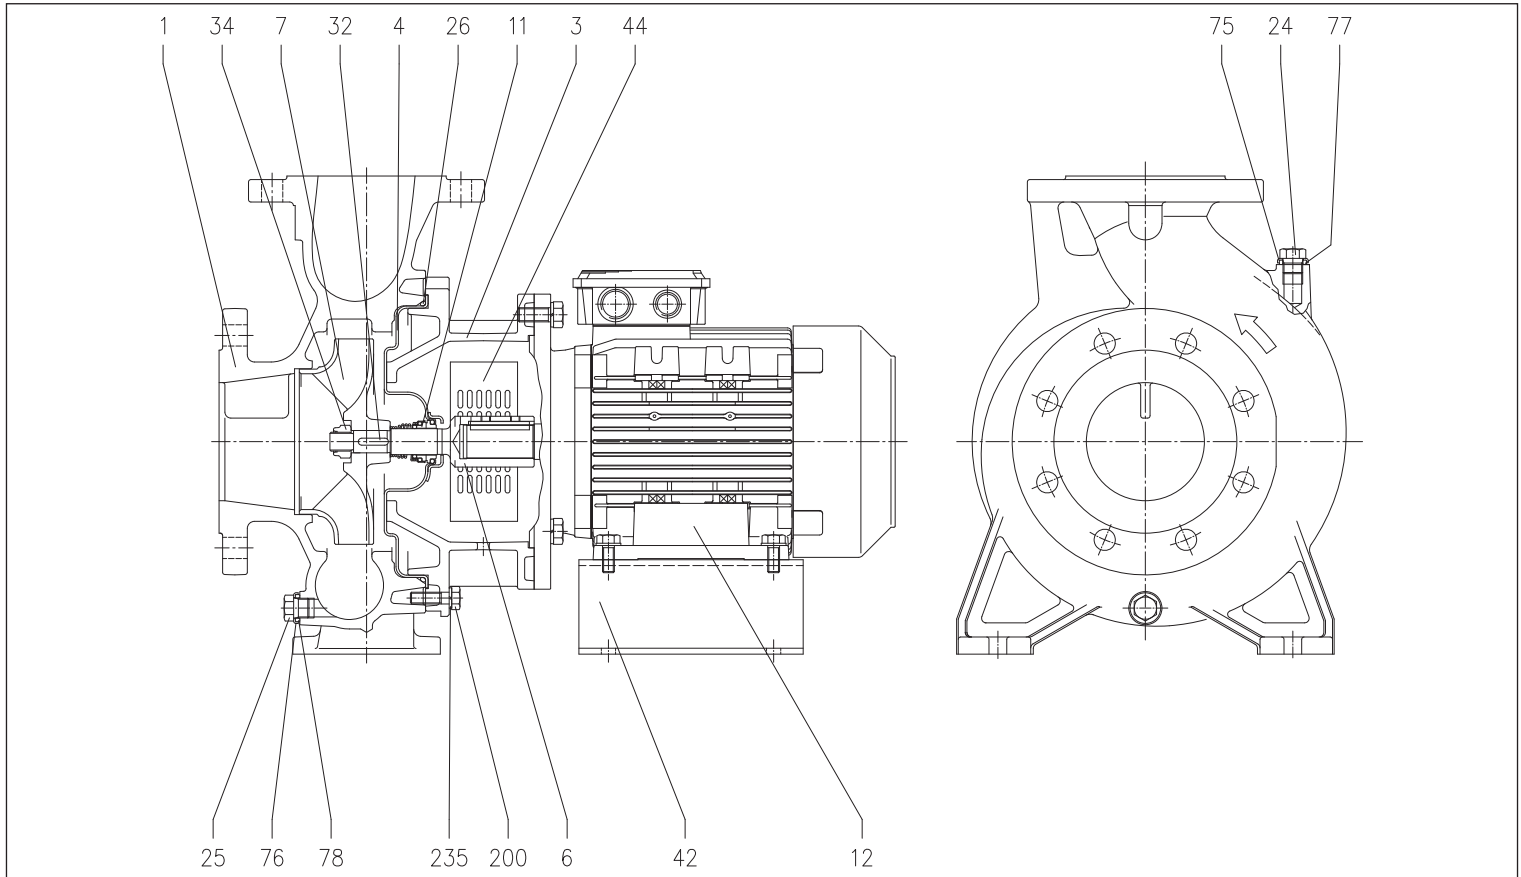

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	032	Key	EN 1.4401 (AISI 316)
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	EN 1.4404 (AISI 316L)
004	Seal housing disc	EN 1.4404 (AISI 316L)	042	Foot	Galvanised Steel
006	Joint	EN 1.4404 (AISI 316L)	044	Support protection	EN 1.4301 (AISI 304)
007	Impeller	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SiC/SiC/FPM	076	Washer	
012	Motor	-	077	O-Ring	FPM
024	Filler cap	EN 1.4404 (AISI 316L)	078	O-Ring	FPM
025	Drain plug	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
026	O-Ring	FPM	235	Washer	EN 1.4301(AISI 304)

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LS4 65-250, 80 RANGE SECTIONAL VIEW

4 Poles

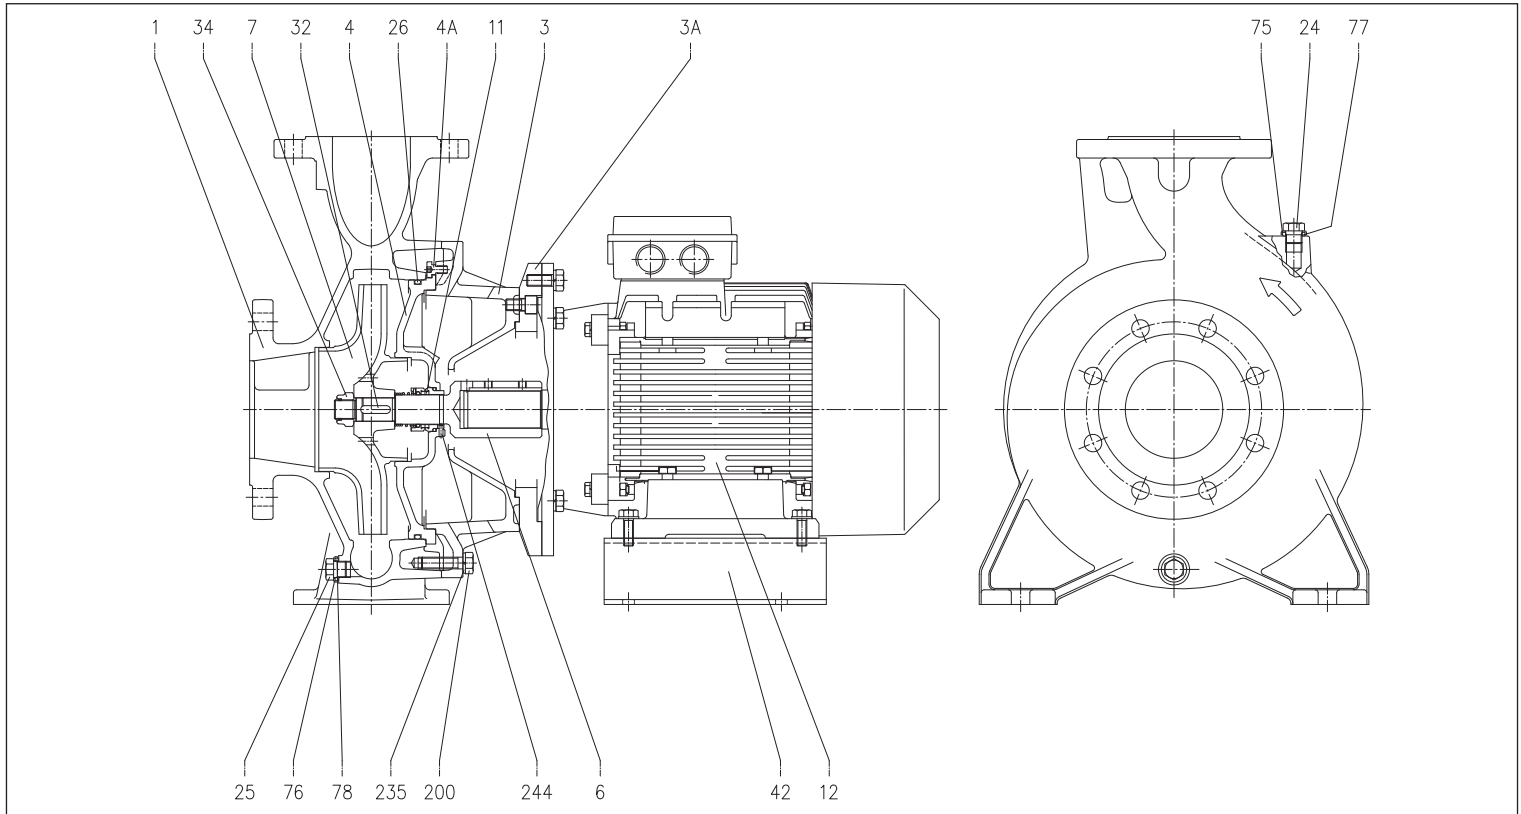

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	032	Key	EN 1.4401 (AISI 316)
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	EN 1.4404 (AISI 316L)
003A	Adapter ring [1]	Cast iron EN-GJL-200-EN 1561	042	Motor foot	Galvanised Steel
004	Seal housing disc	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
004A	Seal housing disc screw	EN 1.4301(AISI 304)	076	Washer	
006	Joint	EN 1.4404 (AISI 316L)	077	O-Ring	FPM
007	Impeller	EN 1.4401 (AISI 316)	078	O-Ring	
011	Mechanical seal	SiC/SiC/FPM	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
012	Motor	-	235	Washer	EN 1.4301(AISI 304)
024	Filler cap	EN 1.4404 (AISI 316L)	244	Plug [2]	EN 1.4301(AISI 304)
025	Drain plug	EN 1.4404 (AISI 316L)			
026	O-Ring	FPM			


[1]= For 65-250/5.5 kW only
[2]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)P4 32, 40, 50, 65 SECTIONAL VIEW

4 Poles

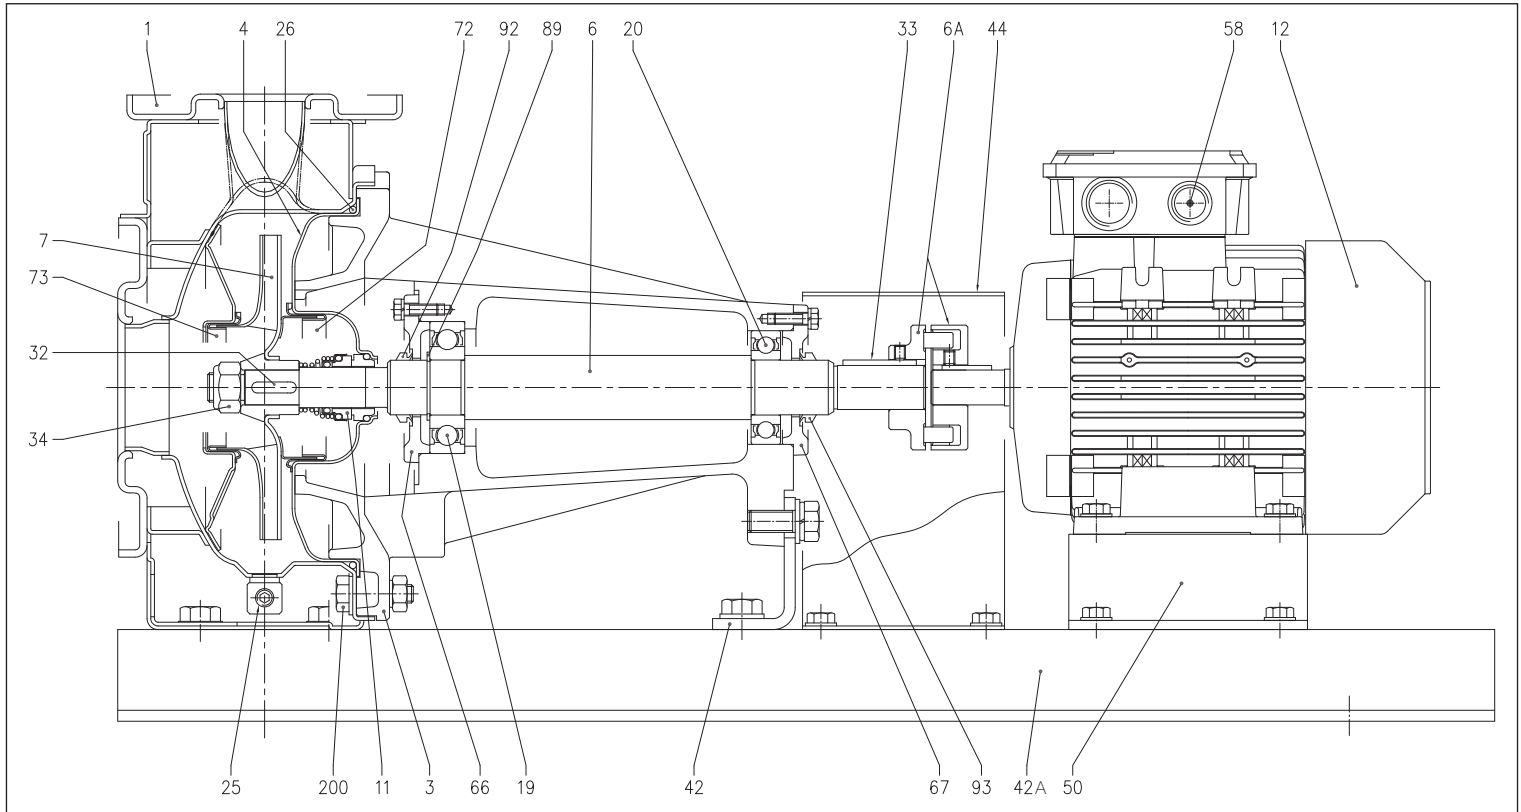

MATERIALS TABLE

Ref.	Name	Material	
		3P4	3LP4
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Shaft - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006A	Seal housing disc Joint	Cast iron EN-GJL-250-EN 1561	
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
	32, 40, 50 65-125/160/200	EN 1.4401 (AISI 316)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
012	Motor	-	-
019	Bearing (pump side)	-	-
020	Bearing (motor side)	-	-
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
033	Key	C 40	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Galvanised Steel	
042A	Base	Galvanised steel Fe 37	
044	Joint cover	Galvanised Steel	
050	Foot	Galvanised Steel	
058	Cable gland	-	
066	Support cover	Cast iron EN-GJL-250-EN 1561	
067	Support cover	Cast iron EN-GJL-250-EN 1561	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
089	Seeger ring	Carbon steel TC 80	
092	Sealing ring	-	
093	Sealing ring	-	
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	



[1]= For the versions: 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3LP4 80-160 SECTIONAL VIEW

4 Poles

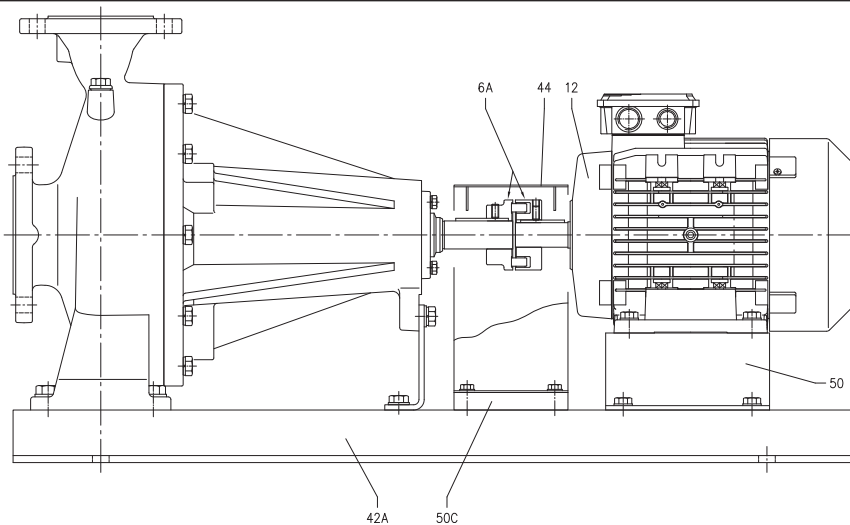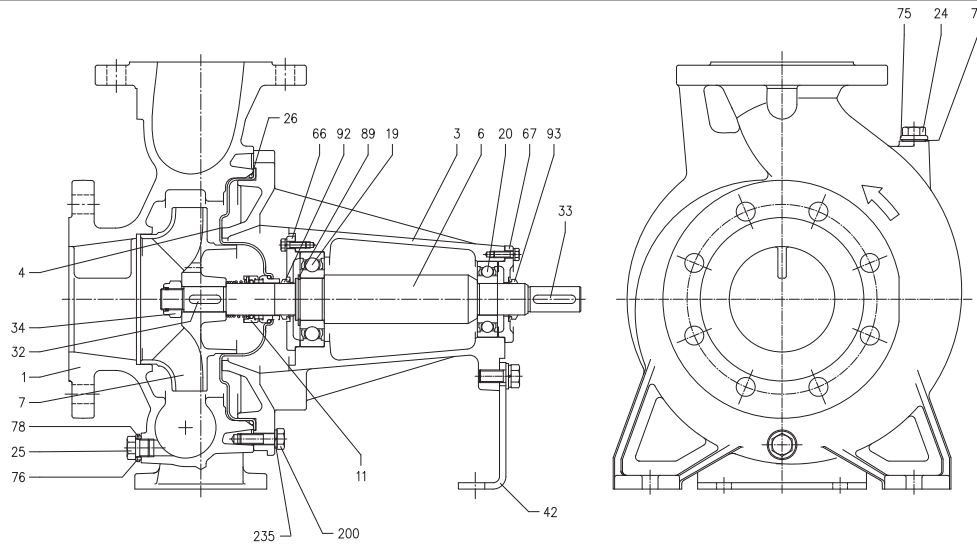

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	042	Pump support	Galvanised Steel
003	Motor support	Cast iron EN-GJL-200-EN 1561	042A	Base	Galvanised Steel
004	Seal housing disc	EN 1.4404 (AISI 316L)	044	Protection	Galvanised Steel
006	Shaft	EN 1.4404 (AISI316L) Part in contact with the liquid	050	Foot	Aluminium
006A	Joint	Cast iron EN-GJL-250-EN 1561	050C	Protection spacer	-
007	Impeller	EN 1.4401 (AISI 316)	066	Support cover	Cast iron EN-GJL-200-EN 1561
011	Mechanical seal	SIC/SIC/FPM	067	Support cover	Cast iron EN-GJL-200-EN 1561
012	Motor	-	075	Washer	EN 1.4404 (AISI 316L)
019	Bearing (pump side)	-	076	Washer	
020	Bearing (motor side)	-	077	O-Ring	FPM
024	Filler cap	EN 1.4404 (AISI 316L)	078	O-Ring	
025	Drain plug	EN 1.4404 (AISI 316L)	089	Seeger ring	Carbon steel TC 80
026	O-Ring	FPM	092	Ring V	-
032	Key	EN 1.4401 (AISI 316)	093	Ring V	Stainless steel A270 class ISO 3506/1
033	Key	C 40	200	Screw (pump body)	EN 1.4301(AISI 304)
034	Impeller nut	EN 1.4404 (AISI 316L)	235	Washer	



[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LP4 65-250, 80 SECTIONAL VIEW

4 Poles

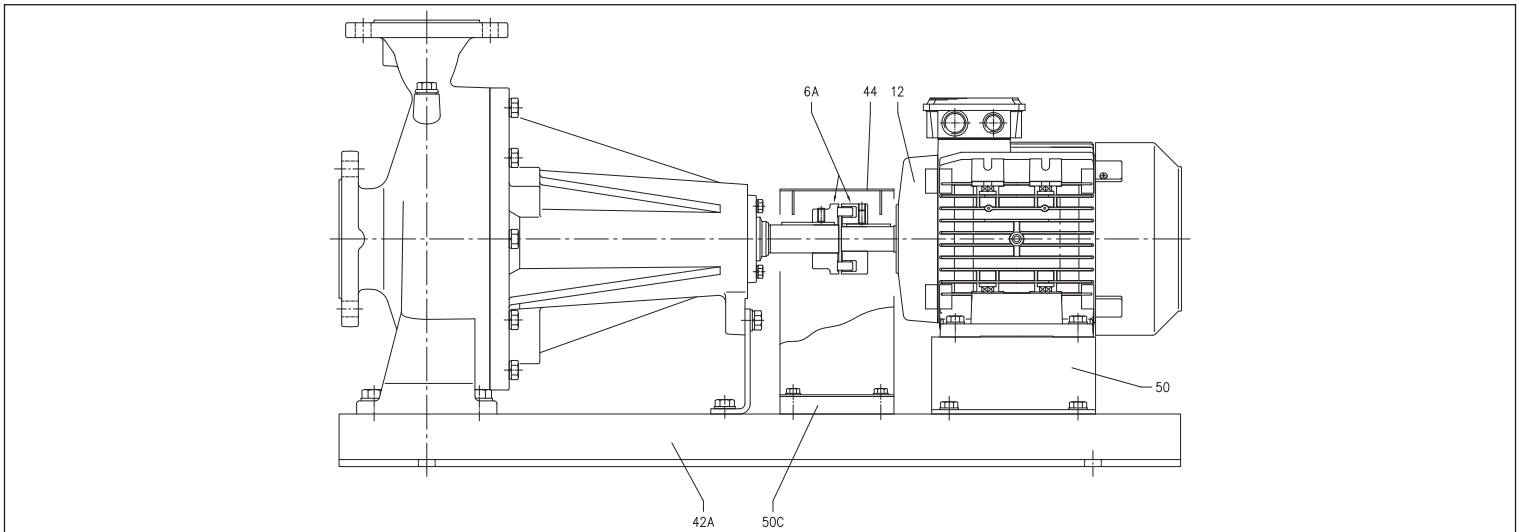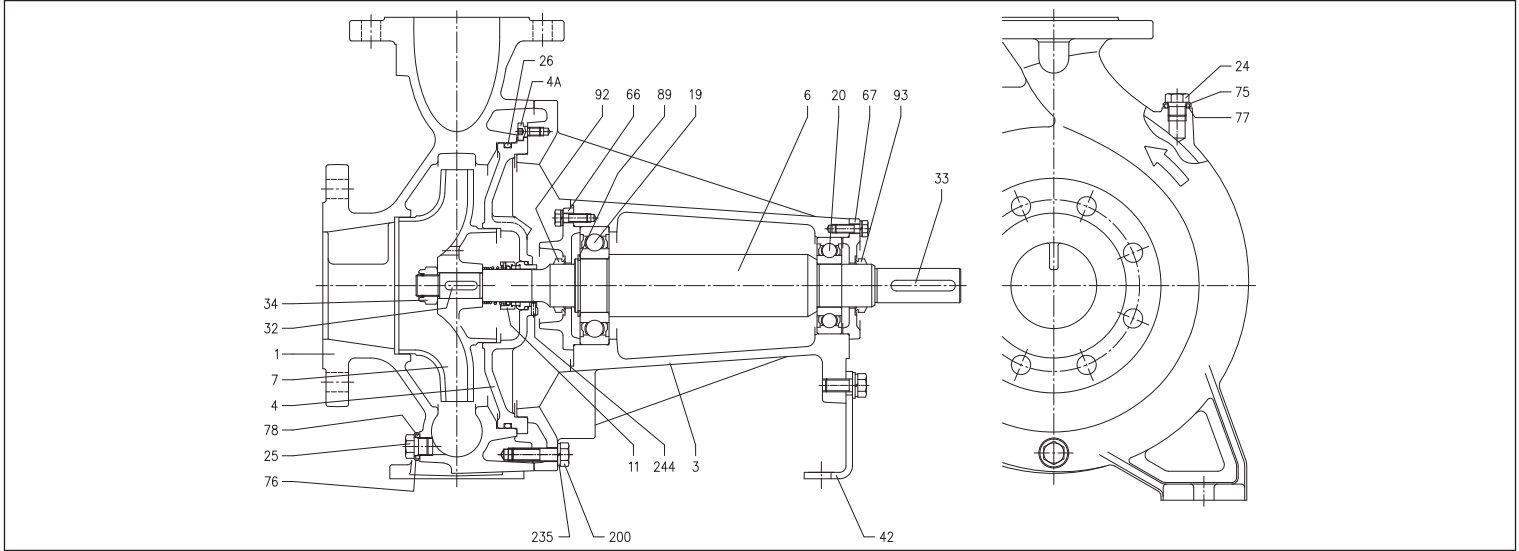

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	042	Foot	Galvanised Steel
003	Motor support	Cast iron EN-GJL-200-EN 1561	042A	Base	Galvanised Steel
004	Seal housing disc	EN 1.4401 (AISI 316)	044	Joint cover	Galvanised Steel
004A	Seal housing disc screw	EN 1.4301(AISI 304)	050C	Joint cover spacer [1]	Aluminium
006	Shaft	EN 1.4462 (duplex steel) per 30-37 kW	066	Support cover	Cast iron EN-GJL-200-EN 1561
006A	Joint	Cast iron EN-GJL-200-EN 1561	067	Support cover	Cast iron EN-GJL-200-EN 1561
007	Impeller	EN 1.4401 (AISI316)	075	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SiC/SiC/FPM	076	Washer	
012	Motor	-	077	O-Ring	FPM
019	Bearing (pump side)	-	078	O-Ring	
020	Bearing (motor side)	-	089	Seeger ring	Carbon steel TC 80
024	Filler cap	EN 1.4404 (AISI 316L)	092	Sealing ring	-
025	Drain plug	EN 1.4404 (AISI 316L)	093	Sealing ring	-
026	O-Ring	FPM	200	Screw (pump body)	Stainless steel A270 class ISO 3506/1
032	Key	EN 1.4401 (AISI 316)	235	Washer	EN 1.4301 (AISI 304)
033	Key	C 40	244	Plug [2]	EN 1.4301 (AISI 304)
034	Impeller nut	EN 1.4404 (AISI 316L)			


[1]= For 65-250/3-4 kW only
[2]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3(L)SF4 32, 40, 50, 65 SECTIONAL VIEW

4 Poles

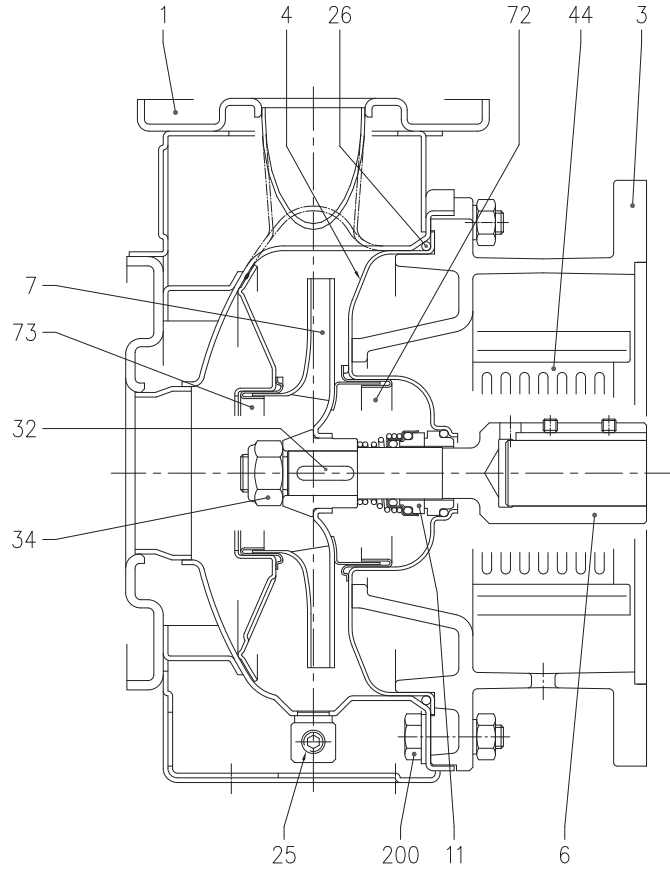

MATERIALS TABLE

Ref.	Name	Material	
		3SF4	3LSF4
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Joint - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller 32, 40, 50 65-125/160/200	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
044	Support protection	EN 1.4301 (AISI 304)	
072	Wear ring [1]	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	


[1]= For 32-200, 40-200, 50-160, 50-200 only

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LSF4 80-160 SECTIONAL VIEW

4 Poles

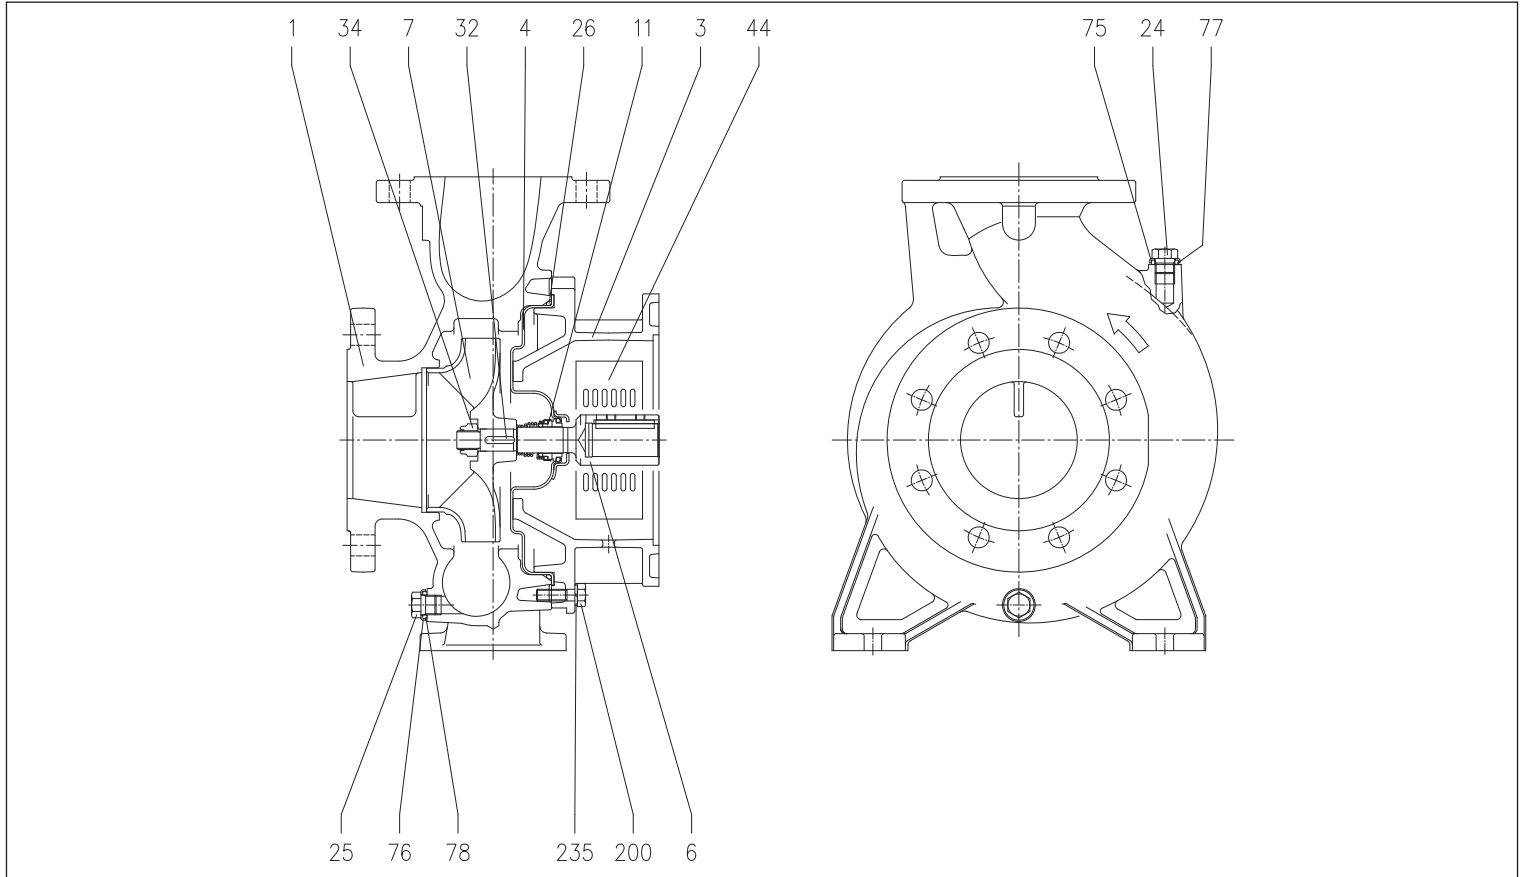

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	032	Key	EN 1.4401 (AISI 316)
003	Motor support	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	EN 1.4404 (AISI 316L)
004	Seal housing disc	EN 1.4404 (AISI 316L)	044	Support protection	EN 1.4301 (AISI 304)
006	Joint	EN 1.4404 (AISI 316L)	075	Washer	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4401 (AISI 316)	076	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SIC/SiC/FPM	077	O-Ring	FPM
024	Filler cap	EN 1.4404 (AISI 316L)	078	O-Ring	
025	Drain plug	EN 1.4404 (AISI 316L)	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
026	O-Ring	FPM	235	Washer	EN 1.4301(AISI 304)

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LSF4 65-250, 80 SECTIONAL VIEW

4 Poles

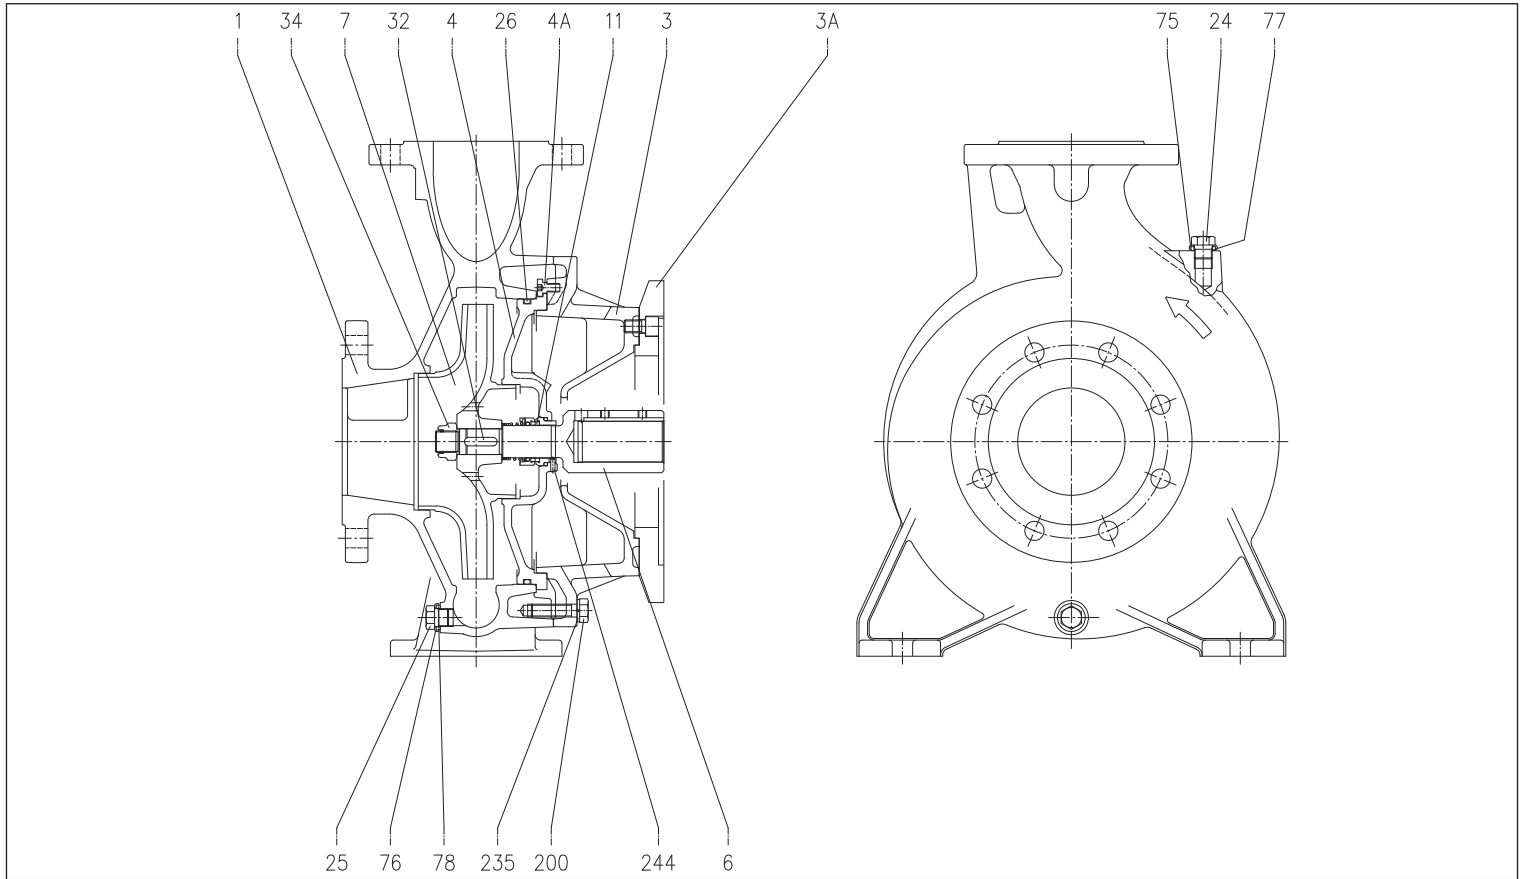

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	026	O-Ring	FPM
003	Motor support	Cast iron EN-GJL-200-EN 1561	032	Key	EN 1.4401 (AISI 316)
003A	Adapter ring [1]	Cast iron EN-GJL-200-EN 1561	034	Impeller nut	EN 1.4404 (AISI 316L)
004	Seal housing disc	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
004A	Seal housing disc screw	EN 1.4301(AISI 304)	076	Washer	EN 1.4404 (AISI 316L)
006	Joint	EN 1.4404 (AISI 316L)	077	O-Ring	FPM
007	Impeller	EN 1.4401 (AISI 316)	078	O-Ring	
011	Mechanical seal	SiC/SiC/FPM	200	Screw (pump body)	Stainless steel A2-70 class ISO 3506/1
024	Filler cap	EN 1.4404 (AISI 316L)	235	Washer	EN 1.4301(AISI 304)
025	Drain plug	EN 1.4404 (AISI 316L)	244	Plug [2]	EN 1.4301(AISI 304)


[1]= For 65-250/5.5 kW only
[2]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

3(L)PF4 32, 40, 50, 65 SECTIONAL VIEW

4 Poles

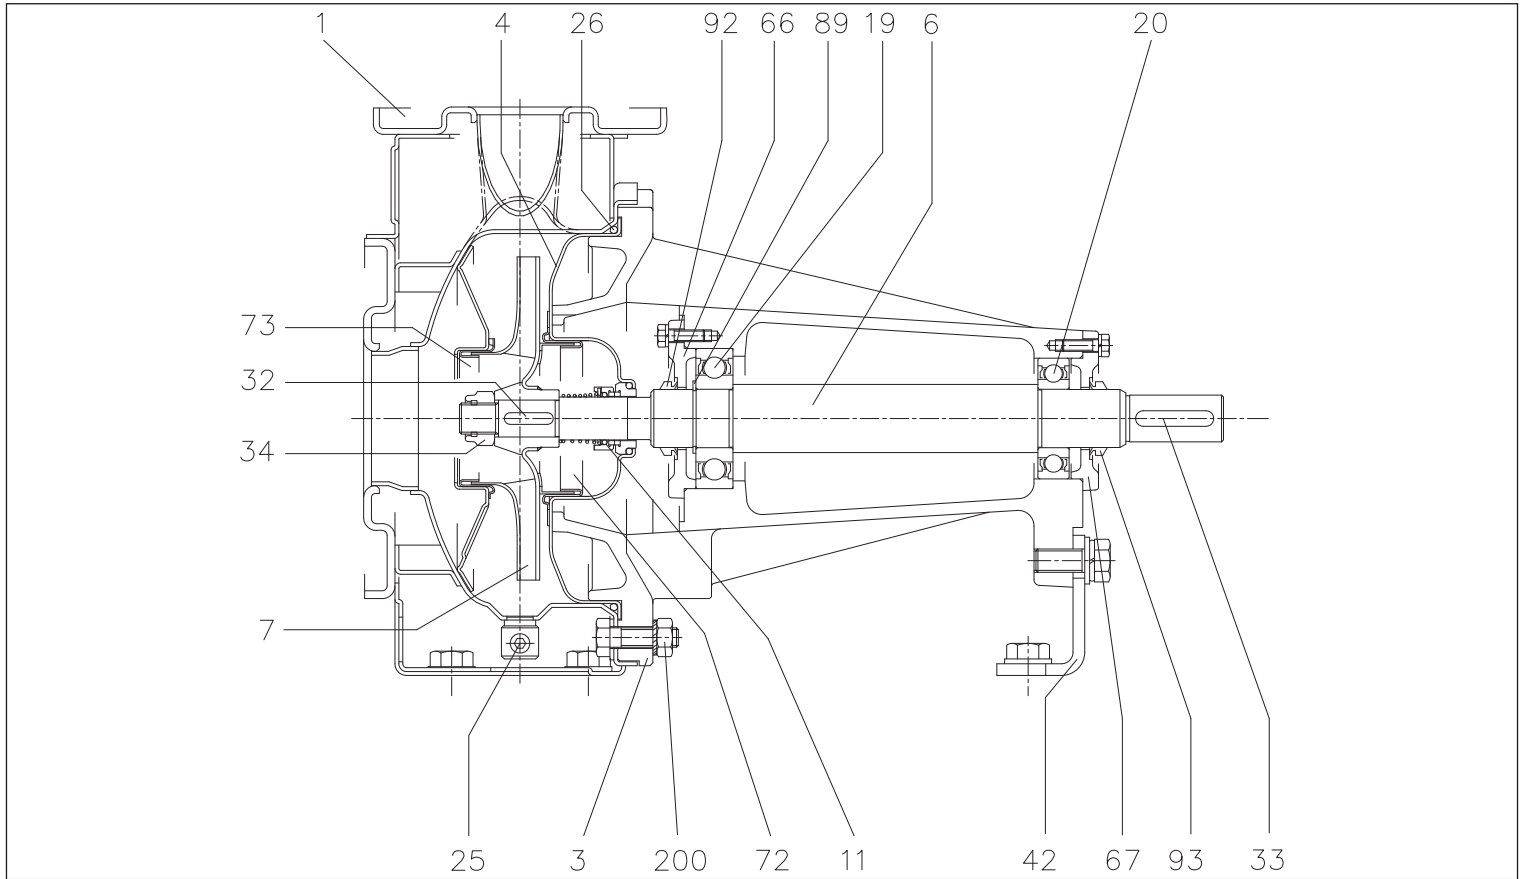

MATERIALS TABLE

Ref.	Name	Material	
		3PF4	3LPF4
001	Pump body	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	
004	Seal housing disc	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
006	Shaft - Part in contact with the liquid	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
011	Mechanical seal	Carbon/Ceramic/NBR	SiC/SiC/FPM
019	Bearing (pump side)	-	-
020	Bearing (motor side)	-	-
025	Drain plug	EN 1.4401 (AISI 316) / PTFE	
026	O-Ring	NBR	FPM
032	Key	EN 1.4401 (AISI 316)	
033	Key	C 40	
034	Impeller nut	EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
042	Foot	Galvanised Steel	
066	Support cover	Cast iron EN-GJL-250-EN 1561	
067	Support cover	Cast iron EN-GJL-250-EN 1561	
072	Wear ring [1]	not for the 65 EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
073	Wear ring	not for the 65 EN 1.4301 (AISI 304)	EN 1.4404 (AISI 316L)
089	Seeger ring	Carbon steel TC 80	
092	Sealing ring	-	
093	Sealing ring	-	
200	Screw (pump body)	Stainless steel A270 class ISO 3506/1	


[1]= For the versions: 32-200/3, 32-200/4, 32-200/5.5, 40-200/5.5, 40-200/7.5, 40-200/11, 50-160/5.5, 50-160/7.5, 50-200/9.2, 50-200/11, 50-200/15

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LPF4 80-160 SECTIONAL VIEW

4 Poles

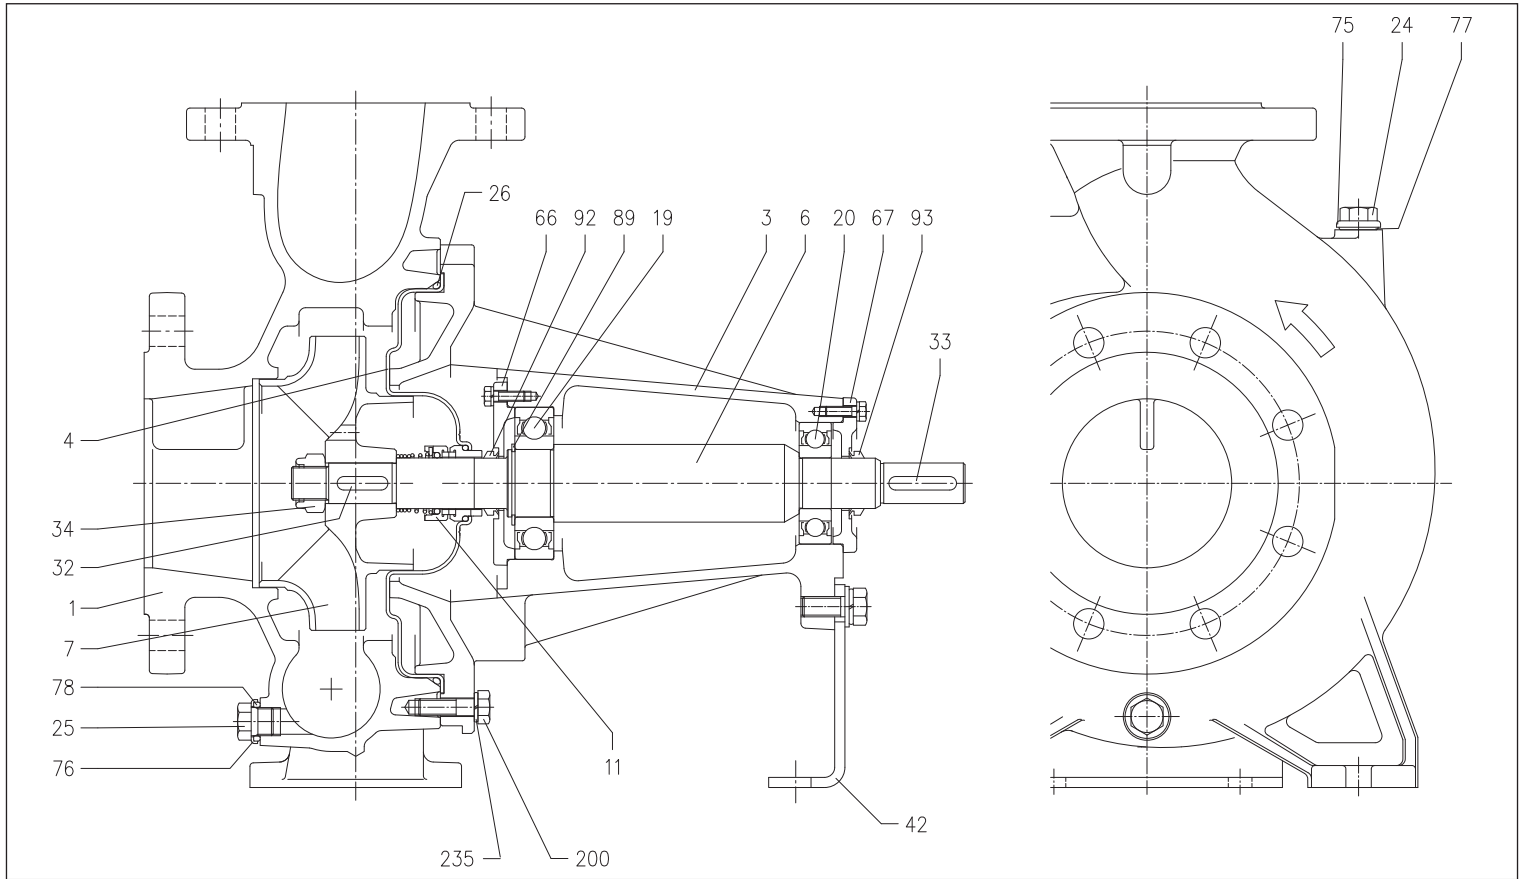

MATERIALS TABLE

Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	034	Impeller nut	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	042	Foot	Galvanised Steel
004	Seal housing disc	EN 1.4404 (AISI 316L)	066	Support cover	Cast iron EN-GJL-200-EN 1561
006	Shaft	EN 1.4404 (AISI 316L) Part in contact with the liquid	067	Support cover	Cast iron EN-GJL-200-EN 1561
007	Impeller	EN 1.4401 (AISI 316)	075	Washer	EN 1.4404 (AISI 316L)
011	Mechanical seal	SiC/SiC/FPM	076	Washer	
019	Bearing (pump side)	-	077	O-Ring	FPM
020	Bearing (motor side)	-	078	O-Ring	
024	Filler cap	EN 1.4404 (AISI 316L)	089	Seeger ring	Carbon steel TC 80
025	Drain plug	EN 1.4404 (AISI 316L)	092	Sealing ring	-
026	O-Ring	FPM	093	Sealing ring	-
032	Key	EN 1.4401 (AISI 316)	200	Screw (pump body)	Stainless steel A270 class ISO 3506/1
033	Key	C 40	235	Washer	EN 1.4301(AISI 304)


[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733
(FORMER DIN 24255)

3LPF4 65-250, 80 SECTIONAL VIEW

4 Poles

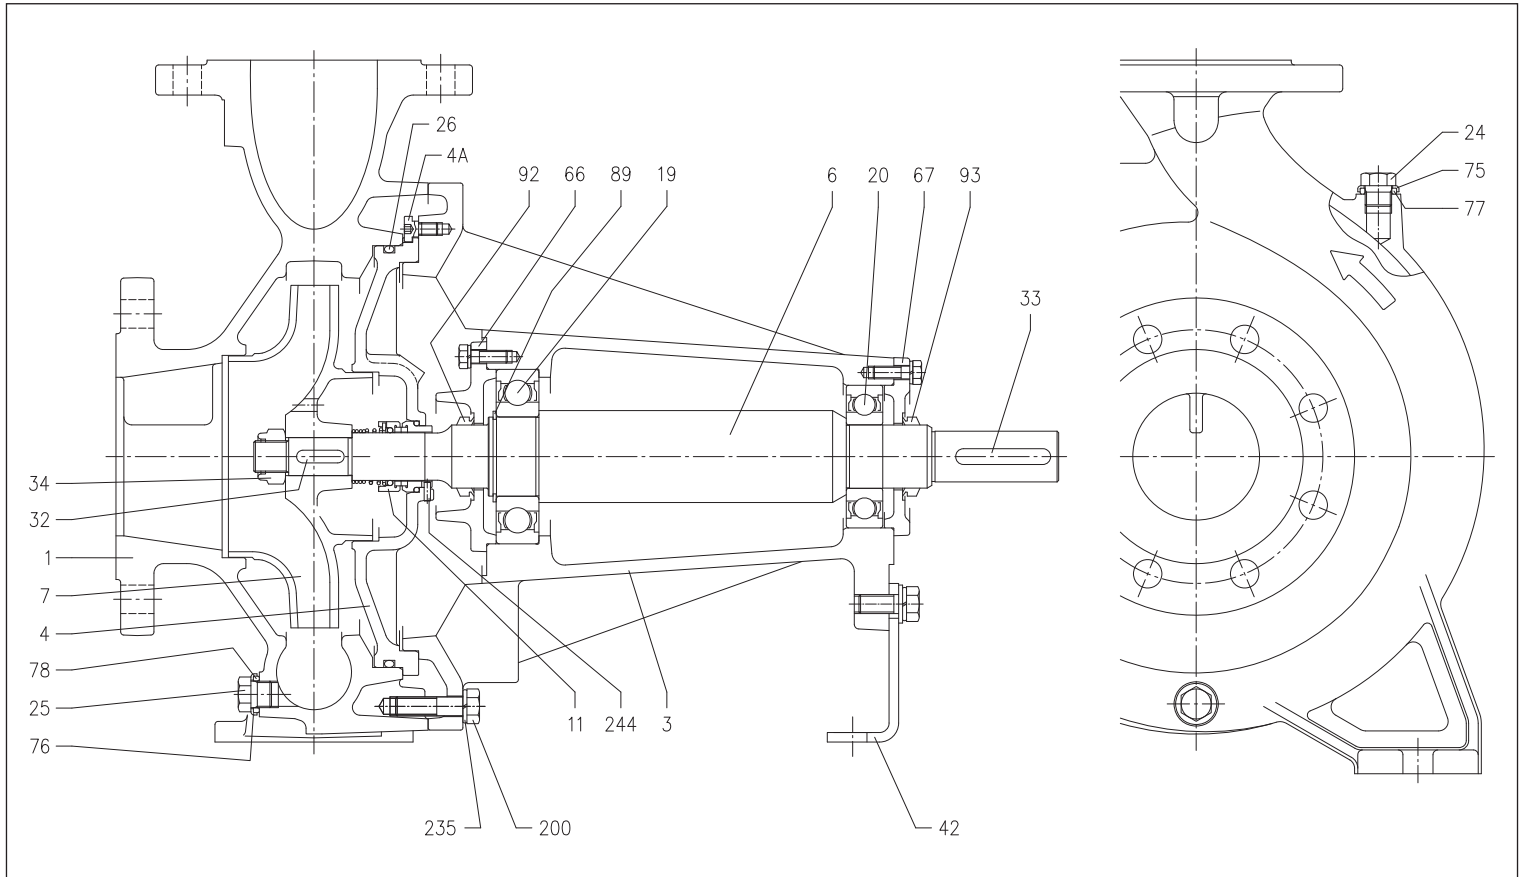

MATERIALS TABLE


Ref.	Name	Material	Ref.	Name	Material
001	Pump body	EN 1.4401 (AISI 316)	034	Impeller nut	EN 1.4404 (AISI 316L)
003	Motor support	Cast iron EN-GJL-200-EN 1561	042	Foot	Galvanised Steel
004	Seal housing disc	EN 1.4401 (AISI 316)	066	Support cover	Cast iron EN-GJL-200-EN 1561
004A	Seal housing disc screw	EN 1.4301(AISI 304)	067	Support cover	Cast iron EN-GJL-200-EN 1561
006	Shaft	EN 1.4462 (duplex steel) for 30-37 kW	075	Washer	EN 1.4404 (AISI 316L)
007	Impeller	EN 1.4401 (AISI316)	076	Washer	
011	Mechanical seal	SiC/SiC/FPM	077	O-Ring	FPM
019	Bearing (pump side)	-	078	O-Ring	
020	Bearing (motor side)	-	089	Seeger ring	Carbon steel TC 80
024	Filler cap	EN 1.4404 (AISI 316L)	092	Sealing ring	-
025	Drain plug	EN 1.4404 (AISI 316L)	093	Sealing ring	-
026	O-Ring	FPM	200	Screw (pump body)	Stainless steel A270 class ISO 3506/1
032	Key	EN 1.4401 (AISI 316)	235	Washer	EN 1.4301 (AISI 304)
033	Key	C 40	244	Plug [1]	EN 1.4301 (AISI 304)

[1]= Not for H and E versions

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

MECHANICAL SEAL standard version

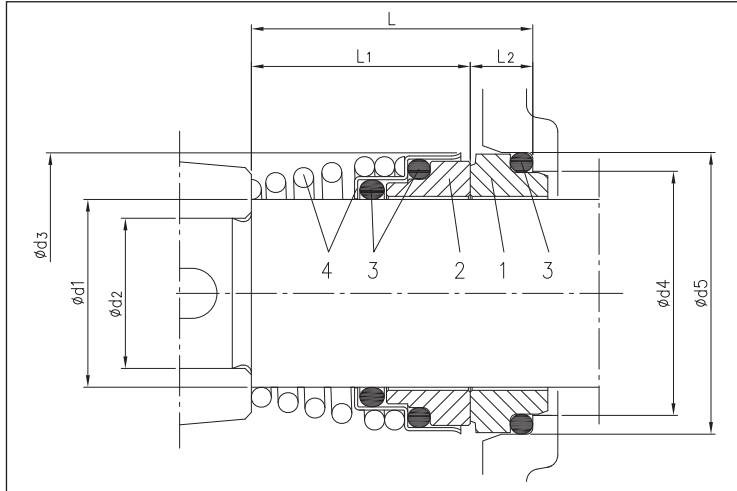

MATERIALS TABLE

Ref.	Name	Material	
		Standard	H
1	Fixed part	Carbon	Carbon
2	Rotating part	Ceramic	Ceramic
3	Gasket	NBR	FPM
4	Frame + spring	EN 1.4401 (AISI 316)	EN 1.4401 (AISI 316)

SPECIAL MECHANICAL SEALS (on request)

Name	Material				
	H version	HS version	HW version	HSW version	E version
Fixed Part	Carbon	SiC	Tungsten Carbide	Tungsten Carbide	Carbon
Rotating Part	Ceramic	SiC	Tungsten Carbide	SiC	SiC
Elastomers	FPM	FPM	FPM	FPM	EPDM
Spring	AISI 316	AISI 316	AISI 316	AISI 316	AISI 316
Structure/Frame	AISI 304	AISI 316	AISI 304	AISI 304	AISI 316

3 - 3L SERIES

CENTRIFUGAL ELECTRIC PUMPS STANDARDISED IN COMPLIANCE WITH EN 733 (FORMER DIN 24255)

ELECTRIC DATA TABLE

4 Poles

Model	P ₂		Mec Motor	P ₁ [kW]	Absorbed Current [A]		
	[HP]	[kW]			230V	400V	690V
3(.)M4 32-125/0.25	0,33	0,25	71	0,55	1,9	1,1	-
3(.)M4 32-160/0.37R	0,5	0,37	80	0,80	2,6	1,5	-
3(.)M4 32-160/0.37	0,5	0,37	80	0,80	2,6	1,5	-
3(.)M4 32-200/0.55R	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 32-200/0.55	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 32-200/0.75	1	0,75	90	1,60	4,7	2,7	-
3(.)M4 40-125/0.37R	0,5	0,37	71	0,55	1,9	1,1	-
3(.)M4 40-125/0.37	0,5	0,37	71	0,55	1,9	1,1	-
3(.)M4 40-160/0.55R	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 40-160/0.55	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 40-200/1.1R	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 40-200/1.1	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 40-200/1.5	2	1,5	90	2,10	6,2	3,6	-
3(.)M4 50-125/0.55R	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 50-125/0.55	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 50-160/1.1R	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 50-160/1.1	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 50-200/1.5R	2	1,5	90	2,10	6,2	3,6	-
3(.)M4 50-200/1.5	2	1,5	90	2,10	6,2	3,6	-
3(.)M4 50-200/2.2	3	2,2	100	2,75	8,7	5	-
3(.)M4 65-125/0.55	0,75	0,55	80	0,80	2,6	1,5	-
3(.)M4 65-125/0.75	1	0,75	90	1,60	4,7	2,7	-
3(.)M4 65-125/1.1	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 65-160/1.1	1,5	1,1	90	1,60	4,7	2,7	-
3(.)M4 65-160/1.5	2	1,5	90	2,10	6,2	3,6	-
3(.)M4 65-160/2.2	3	2,2	100	2,75	8,7	5	-
3(.)M4 65-200/2.2R	3	2,2	100	2,75	8,7	5	-
3(.)M4 65-200/2.2	3	2,2	100	2,75	8,7	5	-
3(.)M4 65-200/3	4	3	100	3,60	11,4	6,6	-
3LM4 65-250/4	5,5	4	112	5,10	16,1	9,3	-
3LM4 65-250/5.5	7,5	5,5	112	6,60	-	11,8	6,8
3LM4 80-160/1.5	2	1,5	90	2,10	6,2	3,6	-
3LM4 80-160/2.2R	3	2,2	100	2,75	8,7	5	-
3LM4 80-160/2.2	3	2,2	100	2,75	8,7	5	-
3LM4 80-200/3	4	3	100	3,60	11,4	6,6	-
3LM4 80-200/4R	5,5	4	112	5,10	16,1	9,3	-
3LM4 80-200/4	5,5	4	112	5,10	16,1	9,3	-
3LM4 80-250/5.5R	7,5	5,5	132	6,60	-	11,8	6,8
3LM4 80-250/5.5	7,5	5,5	132	6,60	-	11,8	6,8
3LM4 80-250/7.5	10	7,5	132	9,10	-	15,5	8,9

Model	Model	P ₂		Mot. Mec	P ₁ [kW]	Absorbed Current [A]		
		[HP]	[kW]			230V	400V	690V
3(.)S4 32-125/0.25	3(.)P4 32-125/0.25	0,33	0,25	71	0,39	1,2	0,7	-
3(.)S4 32-160/0.37R	3(.)P4 32-160/0.37R	0,5	0,37	71	0,55	2,1	1,2	-
3(.)S4 32-160/0.37	3(.)P4 32-160/0.37	0,5	0,37	71	0,55	2,1	1,2	-
3(.)S4 32-200/0.55R	3(.)P4 32-200/0.55R	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 32-200/0.55	3(.)P4 32-200/0.55	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 32-200/0.75	3(.)P4 32-200/0.75	1	0,75	80	1,06	3,8	2,2	-
3(.)S4 40-125/0.37R	3(.)P4 40-125/0.37R	0,5	0,37	71	0,55	2,1	1,2	-
3(.)S4 40-125/0.37	3(.)P4 40-125/0.37	0,5	0,37	71	0,55	2,1	1,2	-
3(.)S4 40-160/0.55R	3(.)P4 40-160/0.55R	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 40-160/0.55	3(.)P4 40-160/0.55	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 40-200/1.1R	3(.)P4 40-200/1.1R	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 40-200/1.1	3(.)P4 40-200/1.1	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 40-200/1.5	3(.)P4 40-200/1.5	2	1,5	90	1,91	6,2	3,6	-
3(.)S4 50-125/0.55R	3(.)P4 50-125/0.55R	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 50-125/0.55	3(.)P4 50-125/0.55	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 50-160/1.1R	3(.)P4 50-160/1.1R	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 50-160/1.1	3(.)P4 50-160/1.1	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 50-200/1.5R	3(.)P4 50-200/1.5R	2	1,5	90	1,91	6,2	3,6	-
3(.)S4 50-200/1.5	3(.)P4 50-200/1.5	2	1,5	90	1,91	6,2	3,6	-
3(.)S4 50-200/2.2	3(.)P4 50-200/2.2	3	2,2	100	2,72	9,4	5,4	-
3(.)S4 65-125/0.55	3(.)P4 65-125/0.55	0,75	0,55	80	0,79	2,8	1,6	-
3(.)S4 65-125/0.75	3(.)P4 65-125/0.75	1	0,75	80	1,06	3,8	2,2	-
3(.)S4 65-125/1.1	3(.)P4 65-125/1.1	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 65-160/1.1	3(.)P4 65-160/1.1	1,5	1,1	90	1,44	4,7	2,7	-
3(.)S4 65-160/1.5	3(.)P4 65-160/1.5	2	1,5	90	1,91	6,2	3,6	-
3(.)S4 65-160/2.2	3(.)P4 65-160/2.2	3	2,2	100	2,72	9,4	5,4	-
3(.)S4 65-200/2.2R	3(.)P4 65-200/2.2R	3	2,2	100	2,72	9,4	5,4	-
3(.)S4 65-200/2.2	3(.)P4 65-200/2.2	3	2,2	100	2,72	9,4	5,4	-
3(.)S4 65-200/3	3(.)P4 65-200/3	4	3	100	3,62	11,8	6,8	-
3LS4 65-250/4	3LP4 65-250/4	5,5	4	112	4,75	14,7	8,5	-
3LS4 65-250/5.5	3LP4 65-250/5.5	7,5	5,5	132	6,42	-	11,3	6,5
3LS4 80-160/1.5	3LP4 80-160/1.5	2	1,5	90	1,91	6,2	3,6	-
3LS4 80-160/2.2R	3LP4 80-160/2.2R	3	2,2	100	2,72	9,4	5,4	-
3LS4 80-160/2.2	3LP4 80-160/2.2	3	2,2	100	2,72	9,4	5,4	-
3LS4 80-200/3	3LP4 80-200/3	4	3	100	3,62	11,8	6,8	-
3LS4 80-200/4R	3LP4 80-200/4R	5,5	4	112	4,75	14,7	8,5	-
3LS4 80-200/4	3LP4 80-200/4	5,5	4	112	4,75	14,7	8,5	-
3LS4 80-250/5.5R	3LP4 80-250/5.5R	7,5	5,5	132	6,42	-	11,3	6,5
3LS4 80-250/5.5	3LP4 80-250/5.5	7,5	5,5	132	6,42	-	11,3	6,5
3LS4 80-250/7.5	3LP4 80-250/7.5	10	7,5	132	8,58	-	15,1	8,7