


Metering pumps **SK** series



Answer to wide-range application from inclusion into a system to plant facilities.

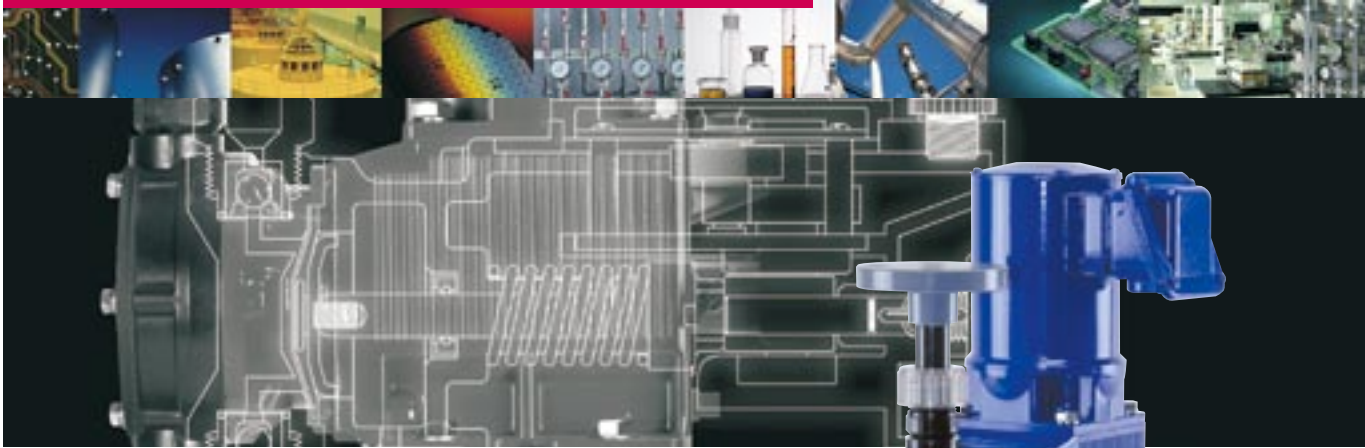


The SK Series are small-sized diaphragm metering pumps suitable for most chemical feeding purposes including water treatment of up to 1 l/min. capacity.

Designed to be light-weight and compact in size, the pumps in SK series are not only most suitable for inclusion into a system, but are also very durable and can withstand severe operating environments such as plant facilities as they have a fully closed structure for outdoor applications.



Note: Base shown on photos is optional accessory.

Construction

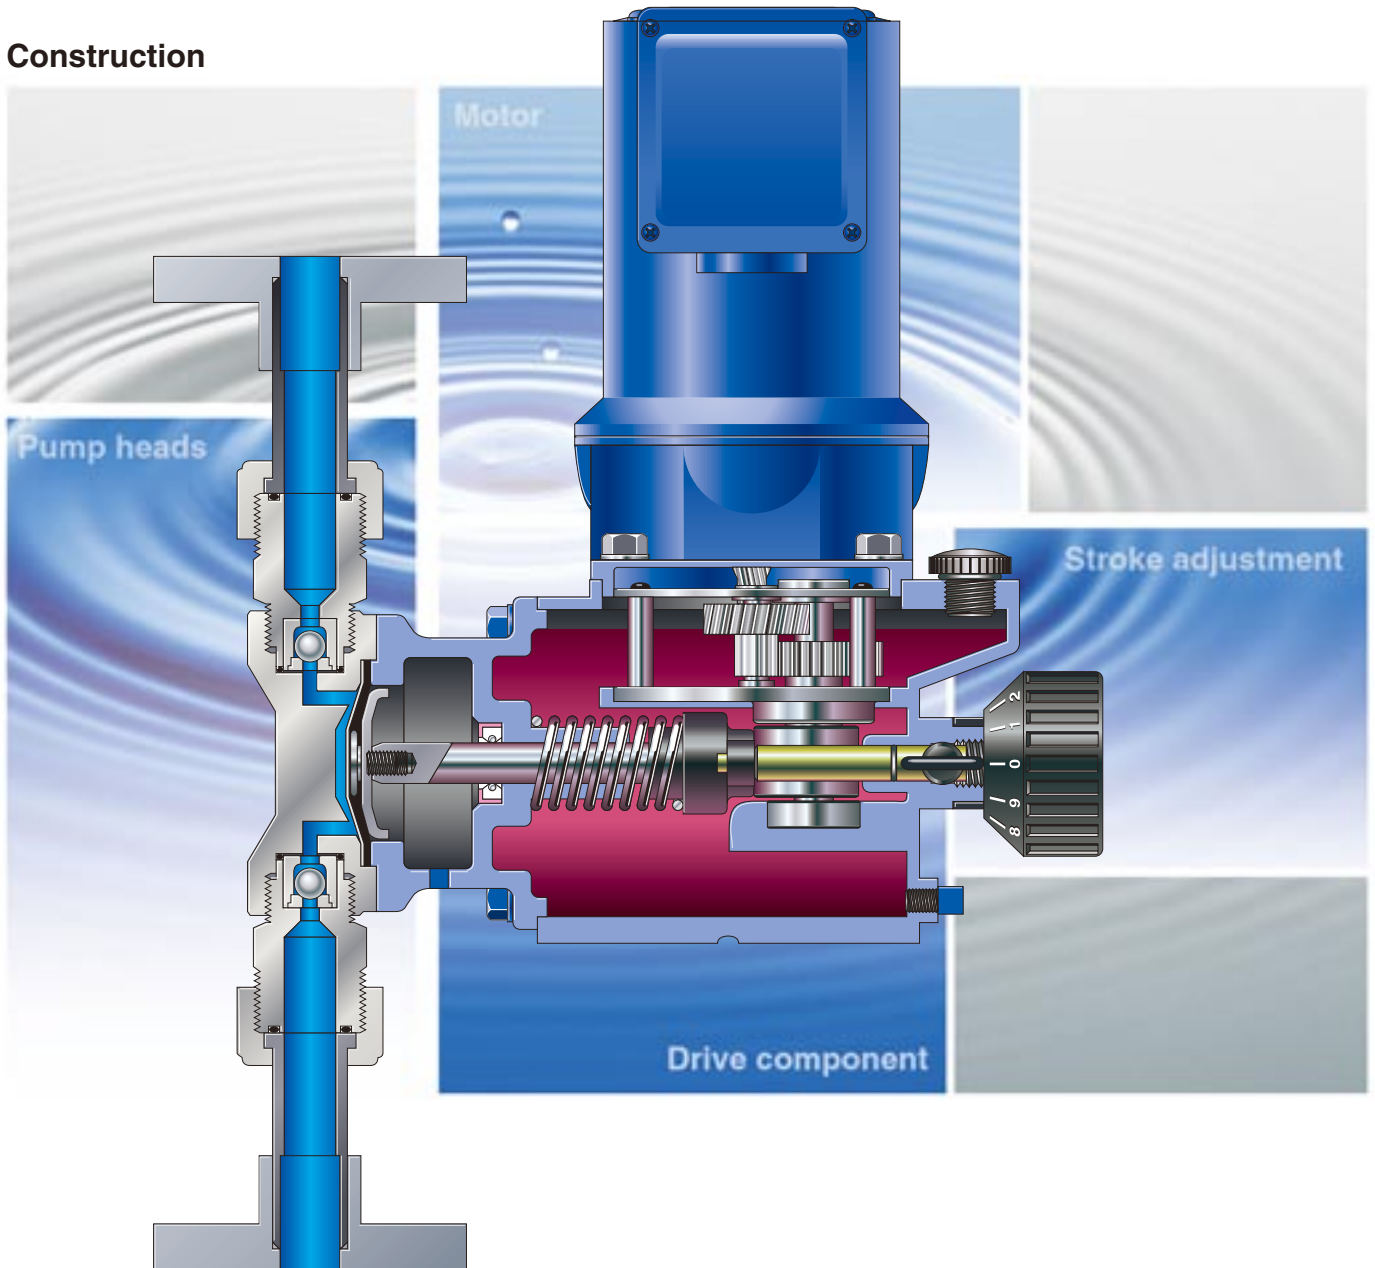

Pump heads

Three types of pump head materials are available, PVC for acid and alkaline, PVDF for strong acid, and stainless steel for solvent. For the connection of the most widely used PVC type pump head, a flange and a tube are available. Another type of applicable tube besides PVC braided tube, is polyethylene.

Motor


Available in two types: SK-S type for the original motor and SK-E type for IEC motor. SK-S type motors come in two models: a 65W 3 phase outdoor use and single phase indoor use. An IEC motor can be set up. (SK-E type driving unit)



Drive component


Driving unit components including the reducer, cam, etc., are built in a small but rigid sealed housing made of diecast. Oil bath lubrication is employed inside the driving unit.

Reducer : Noise is extremely low with the use of high-precision helical gears, and durability is extremely high.




Stroke adjustment

With the micrometer style stroke adjustment system employed, the stroke rate can be set from 0 to 100% in increments of 2.5%.



Wet-end materials

	PVC type			PVDF type	SUS type
	VC	VH	VS	TC	S6
	For acid	For alkaline	For viscous liquid/slurry	For strong acid	For solvent
1 Pump head	PVC	PVC	PVC	PVDF	SUS316
2 Valve	Ceramic	HC	HC	Ceramic	HC
3 Valve seat	FKM	EPDM	SUS316	FKM	SUS316
4 O ring	FKM	EPDM	EPDM	FKM	-
5 Valve gasket	PTFE				
6 Diaphragm	PTFE+EPDM (EPDM is not to be subject to liquid contact)				
Liquid examples	Hydrochloric acid, sulfuric acid, sodium hypochlorite	Caustic soda, coagulant (of low viscosity)	Calcium hydroxide, high-molecular coagulant	Concentrated sulfuric acid, hydrofluoric acid	Organic solvent
Material symbols					
PVC	: Vinyl chloride resin	HC	: Hastelloy C276	PTFE	: Polytetrafluoroethylene
PVDF	: Vinylidene fluoride resin	FKM	: Fluoro rubber		
SUS	: Stainless steel	EPDM	: Ethylene propylene rubber		

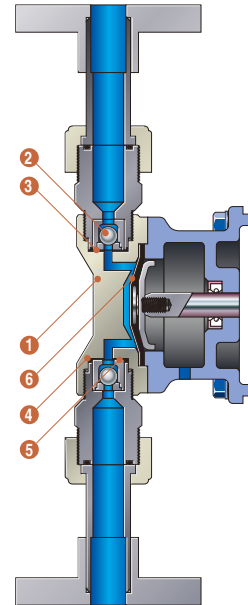

Pump identification

1 2 3 4 5 6 7
SK - S 3 2 VC - 33 S

- | | | | |
|--|--|--|---|
| <p>1. Series name
Metering pump SK series</p> <p>2. Driving unit type
 S: For original motor
 E: For IEC motor</p> | <p>3. Pump head size
 1 : Model 1 2 : Model 2
 3 : Model 3 4 : Model 4</p> <p>4. Reduction rate
 1 : 1/27 2 : 1/15</p> | <p>5. Material symbol
 VC, VH, VS, TC, S6
 (See the material table.)</p> <p>6. Motor
 32, 33, 34, 11, 12
 (See the motor spec. table.)</p> | <p>7. Special arrangement symbol
 S : Special version</p> |
|--|--|--|---|

Specifications

Pump model	Discharge L/min		Max. discharge pressure MPa		Stroke speed spm		Connection		Motor output W	Mass kg		
	50Hz	60Hz	PVC / PVDF	SUS	50Hz	60Hz	Flange	Tube		PVC / PVDF	SUS	
								PVC				PE
SK-11	0.022	0.026	1.0	1.5	53	64	15A JIS10K JIS16K in the case of SUS	ø4 x ø9	ø4 x ø6	65	8	10
SK-21	0.055	0.066	1.0	1.5	53	64					9	
SK-22	0.10	0.12	1.0	1.5	96	116		9	11			
SK-31	0.26	0.31	0.4	1.0	53	64		10	12			
SK-32	0.46	0.55	0.4	0.7	96	116						
SK-41	0.61	0.73	0.5	0.5	53	64						
SK-42	1.10	1.32	0.3	0.3	96	116						

- The discharge amount is based on pump operation at the max. stroke speed using clean water at room temperature.
- The max. discharge pressure of the SK-41 tube style connection is 0.3 MPa.
- Performance specifications:
Quantitative accuracy : within 2% (at FS), **Self-priming** : within 2 m (at FS),
Liquid temperature : 0 - 50°C for PVC/PVDF type, 0 - 80°C for SUS type, **Ambient temperature** : 0 - 40°C
- The discharge amount of VS type may be approx. 15% less than the above shown.
- For viscous liquid or slurry liquid, please contact IWAKI.

Specifications of original motor for SK-S type

Code	Motor type	Output, phase, polarity, and insulation class	Voltage and frequency
32	Totally enclosed outdoor type	65W, 3 phase, 4 pole, B class	200 / 200 / 220V 50 / 60 / 60HZ
33			380 / 380 / 415V 50 / 60 / 50HZ
34			400 / 400 / 440V 50 / 60 / 60HZ
11	Single-phase indoor type	65W, 1 phase, 4 pole, B class	100 / 100 / 110V 50 / 60 / 60HZ
12			220 / 220 / 230V 50 / 60 / 50HZ

Note : SK-S type is a pump with a original flanged motor.

Optional accessories / example of piping

1. Air chamber

Model A



PVC type



SUS type

2. Relief valve

Model RV



PVC flange type



PVC tube type

3. Back pressure valve

Model BV



PVC flange type

4. Y-shaped strainer




PVC type

Tube flange



Flow checker

Model FC

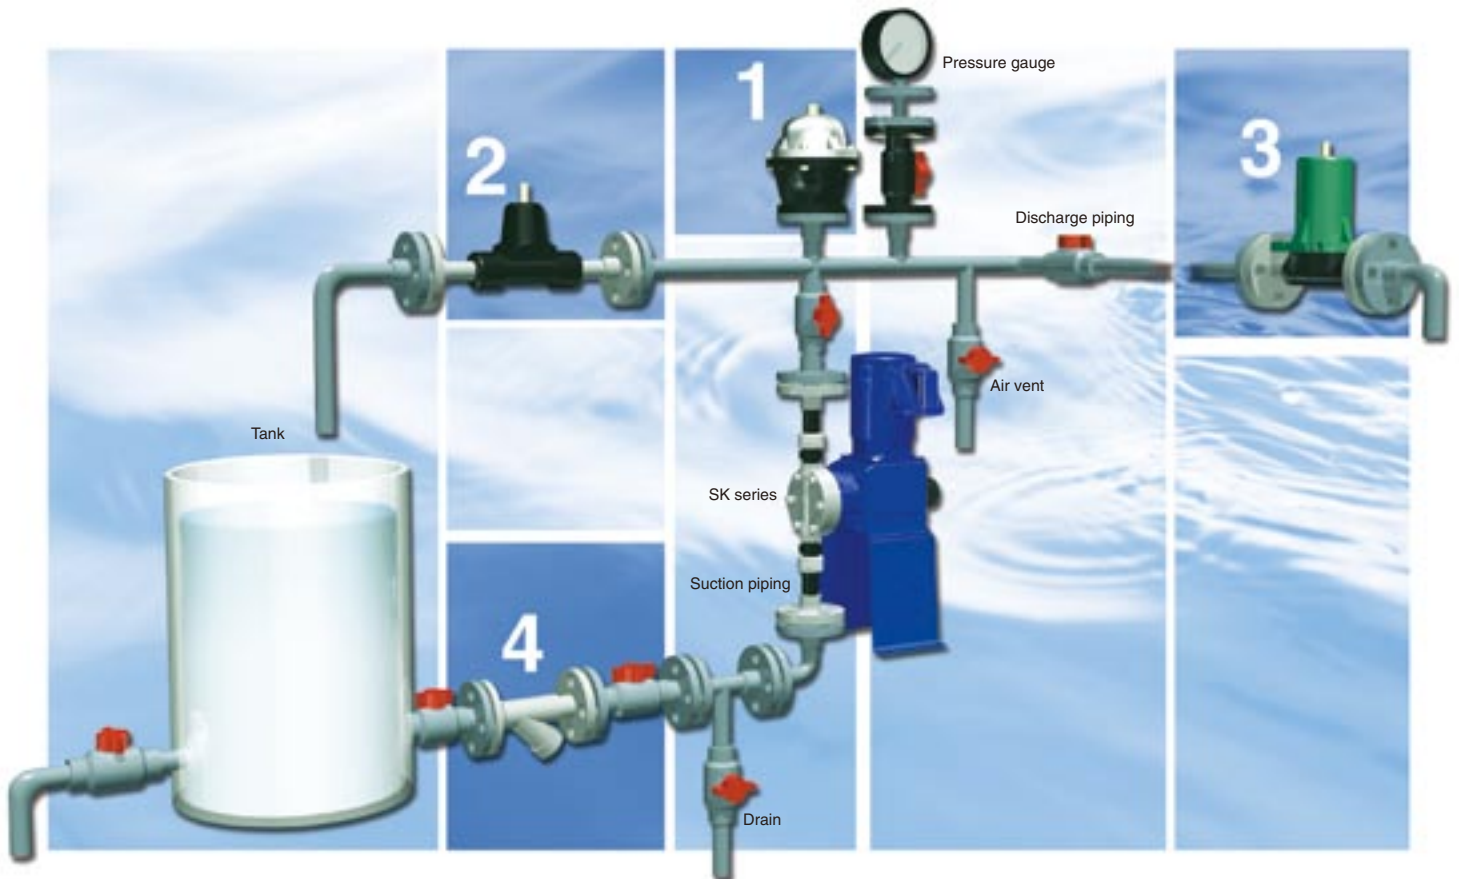

Specifications of optional accessories

Air chamber

Material	Model	Capacity L/min	Max. pressure MPa	Connection
PVC	A-1V□	1.0	0.5	15A - 25A (Common)
SUS	A-05S6-15	0.5	0.9	JIS10K15A
	A-1S6-15	1.5	0.9	

Back pressure valve

Material	Model	Max. capacity L/min	Setting pressure MPa	Connection
PVC	BV-1P□L-4H	1.0	0.05 - 0.3	ø4 x ø9
	BV-1P□-4H	1.0	0.3 - 0.8	ø4 x ø9
	BV-1P□L-8H	1.0	0.05 - 0.3	ø8 x ø13.5
	BV-1P□-8H	1.0	0.3 - 0.8	ø8 x ø13.5
	BV-3P□-12H	3.0	0.1 - 0.8	ø12 x ø18
	BV-1P□L-4P	1.0	0.05 - 0.3	ø4 x ø6
	BV-1P□-4P	1.0	0.3 - 0.8	ø4 x ø6
	BV-1P□L-9P	1.0	0.05 - 0.3	ø9 x ø12
	BV-1P□-9P	1.0	0.3 - 0.8	ø9 x ø12
	BV-3P□-12P	3.0	0.1 - 0.8	ø12 x ø16
	BV-1P□L-15	1.0	0.05 - 0.3	JIS10K15A
	BV-1P□-15	1.0	0.3 - 0.8	JIS10K15A
	BV-3P-15	3.0	0.1 - 0.8	JIS10K15A
	SUS	BV-2S6-15	2.0	0.05 - 0.8
PVDF	BV-1TV-15	1.0	0.05 - 0.8	JIS10K15A
	BV-7T□-15	7.0	0.05 - 0.8	JIS10K15A

Relief valve

Material	Model	Max. capacity L/min	Setting pressure MPa	Connection
PVC	RV-1P□-4H	1.0	0.3 - 0.8	ø4 x ø9
	RV-1P□-8H	1.0	0.3 - 0.8	ø8 x ø13.5
	RV-3P□-12H	3.0	0.1 - 0.3	ø12 x ø18
	RV-1P□-4P	1.0	0.3 - 0.8	ø4 x ø6
	RV-1P□-9P	1.0	0.3 - 0.8	ø9 x ø12
	RV-3P□-12P	3.0	0.1 - 0.3	ø12 x ø16
	RV-1P□-15	1.0	0.3 - 0.8	JIS10K15A
SUS	RV-2S6-15	2.0	0.3 - 0.8	JIS10K15A
	RV-2S6B-15	2.0	0.8 - 1.5	JIS16K15A
	RV-1TV-15	1.0	0.3 - 0.8	JIS10K15A
PVDF	RV-7T□-15	7.5	0.3 - 0.8	JIS10K15A

Tube flange

Material	Model	Connection
PVC	15F x 4 (4 x 9)	ø4 x ø9
	15HF□ x 8	ø8 x ø13.5
	15HF x 12	ø12 x ø18
	15F x 4 (4 x 6)	ø4 x ø6
	15HF□ x 9P	ø9 x ø12
	15HF x 12P	ø12 x ø16

Note

- : Symbol for material of O-Ring ("V" for FKM or "E" for EPDM)
- Material of diaphragm of RV/BV is PTFE except RV/BV-1P type used synthetic rubber.
- Rigid PVC chamber may be deteriorated by ultraviolet ray or the applied chemical liquid over a long period of time. The chamber should be replaced every three years to guarantee safety.
- Symbol of tube size

8H : PVC tube ø8 x ø13.5 12H : PVC tube ø12 x ø18 13E : PVC tube ø13 x ø20 9P : PE tube ø9 x ø12 12P : PE tube ø12 x ø16

Standard accessories



Back pressure valve with check valve




Strainer

- Pump installation bolt (SUS) X 4
- PVC tube of 4 m length, provided with PVC tube type only
- Standard accessories is not available for SK-E except installation bolts.

Models	SK-11, 21, 22	SK-31, 32	SK-41, 42	Applicable pump
Pump installation bolt (SUS)		M8 x 25L x 4		All models
Back pressure valve with check valve	BVC-1P□L-4H	BVC-1P□L-8H	BVC-1P□L-12H	PVC tube type
Strainer	S-V4H	S-V8H	S-V12H	
PVC tube	ø4 x ø9 4m	ø8 x ø13.5 4m	ø12 x ø18 4m	
Back pressure valve with check valve	BVC-1P□L-4P	BVC-1P□L-9P	BVC-1P□L-12P	Polyethylene tube type
Strainer	S-V4P	S-V9P	S-V12P	

- : Symbol for material of O-Ring ("V" for FKM or "E" for EPDM)

Dimensions in mm

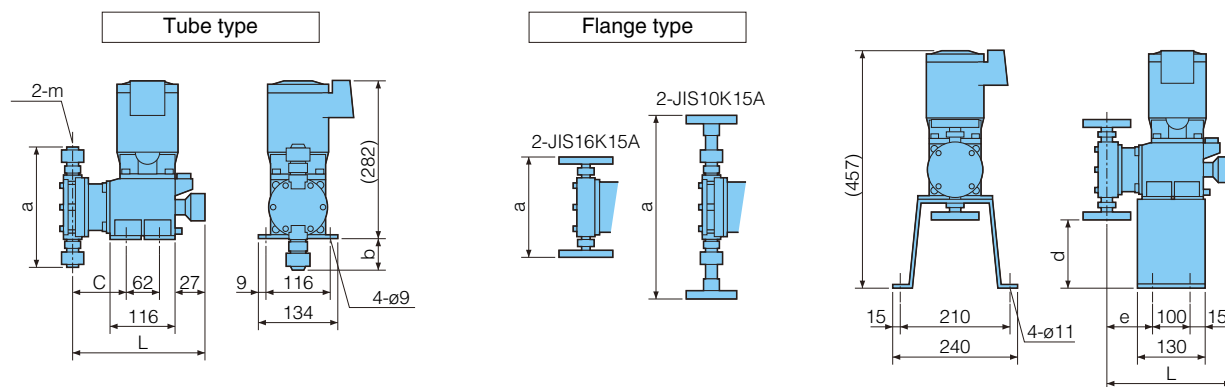

Type	Tube type							Flange type											
	PVC							PVC,PVDF					SUS						
	a	b	c	d	e	L	m	a	b	c	d	e	L	a	b	c	d	e	L
SK-1	146	18	90	157	64	237	*	256	73	90	102	64	237	186	38	88	137	62	234
SK-2	164	27	92	148	66	239		273	82	92	94	66	239	151	21	90	155	64	236
SK-3	199	44	96	131	70	244		309	99	96	76	70	244	168	29	96	146	70	244
SK-4	225	57	95	118	69	244		335	112	95	63	69	244	184	37	96	138	70	244

* Refer to the specifications table for "m" dimension (connection)
 Note : For the dimension of stainless steel type, please contact IWAKI.

www.iwakupumps.jp

IWAKI CO.,LTD. 6-6 Kanda-Sudacho 2-chome Chiyoda-ku Tokyo 101-8558 Japan TEL : (81)3 3254 2935 FAX : 3 3252 8892

EUROPE / U.S.A.

European office : IWAKI Europe GmbH TEL: (49)2154 9254 0 FAX: 2154 9254 48
 Austria : IWAKI (Austria) GmbH TEL: (41)26 674 93 00 FAX: 26 674 93 02
 Belgium : IWAKI Belgium N.V. TEL: (32)13 67 02 00 FAX: 13 67 20 30
 Denmark : IWAKI Nordic A/S TEL: (45)48 24 2345 FAX: 48 24 2346
 Finland : IWAKI Suomi Oy TEL: (358)9 2745810 FAX: 9 2742715
 France : IWAKI France S.A. TEL: (33)1 69 63 33 70 FAX: 1 64 49 92 73
 Germany : IWAKI Europe GmbH TEL: (49)2154 9254 50 FAX: 2154 9254 55
 Holland : IWAKI Holland B.V. TEL: (31)297 241121 FAX: 297 273902
 Italy : IWAKI Italia S.R.L. TEL: (39)02 990 3931 FAX: 02 990 42888
 Norway : IWAKI Norge AS TEL: (47)66 81 16 60 FAX: 66 81 16 61
 Spain : IWAKI Iberica Pumps, S.A. TEL: (34)943 630030 FAX: 943 628799
 Sweden : IWAKI Sverige AB TEL: (46)8 511 72900 FAX: 8 511 72922
 Switzerland : IWAKI (Schweiz) AG TEL: (41)26 674 93 00 FAX: 26 674 93 02
 U.K. : IWAKI Pumps (UK) Ltd. TEL: (44)1743 231363 FAX: 1743 366507
 U.S.A. : IWAKI America Inc. TEL: (1)508 429 1440 FAX: 508 429 1386

ASIA / OCEANIA

Australia : IWAKI Pumps Australia Pty Ltd. TEL: (61)2 9899 2411 FAX : 2 9899 2421
 China :
 Hong Kong : IWAKI Pumps Co., Ltd. TEL: (852)2607 1168 FAX: 2607 1000
 Shanghai : IWAKI Pumps (Shanghai) Co., Ltd. TEL: (86)21 6272 7502 FAX: 21 6272 6929
 Beijing : IWAKI Pumps Co., Ltd. (Beijing office) TEL: (86)10 6442 7713 FAX: 10 6442 7712
 Guangzhou : GFTZ IWAKI Engineering & Trading Co., Ltd. TEL: (86)20 8435 0603 FAX: 20 8435 9181
 Indonesia : IWAKI Singapore (Indonesia Branch) TEL: (62)21 6906606 FAX: 21 6906612
 Korea : IWAKI Korea Co.,Ltd. TEL: (82)2 3474 0523 FAX: 2 3474 0221
 Malaysia : IWAKIm Sdn. Bhd. TEL: (60)3 7803 8807 FAX: 3 7803 4800
 Philippines : IWAKI Chemical Pumps Philippines, Inc. TEL: (63)2 888 0245 FAX: 2 843 3096
 Singapore : IWAKI Singapore Pte Ltd. TEL: (65)6316 2028 FAX: 6316 3221
 Taiwan : IWAKI Pumps Taiwan Co., Ltd. TEL: (886)2 8227 6900 FAX: 2 8227 6818
 Thailand : IWAKI (Thailand) Co.,Ltd. TEL: (66)2 322 2471 FAX: 2 322 2477
 Vietnam : IWAKI Pumps Vietnam Joint Venture Co., Ltd. TEL: (84)61 933456 FAX: 61 933399

()Country codes

Caution for safety use: Before use of pump, read instruction manual carefully to use the product correctly.
 Actual pumps may differ from the photos. Specifications and dimensions are subject to change without prior notice. For further details please contact us.